



OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Area

[215811]

Machine Id

MX-1301 16654

Component

Gearbox

Fluid

MOBIL SHC CIBUS 220 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

● Wear

All component wear rates are normal.

▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

● Fluid Condition

Viscosity of sample indicates oil is within ISO 100 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC06133539	---	---
Sample Date	Client Info		25 Mar 2024	---	---
Machine Age	hrs	Client Info	501	---	---
Oil Age	hrs	Client Info	501	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	11	---
Chromium	ppm	ASTM D5185m	>10	0	---
Nickel	ppm	ASTM D5185m	>10	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m		0	---
Aluminum	ppm	ASTM D5185m	>25	62	---
Lead	ppm	ASTM D5185m	>50	0	---
Copper	ppm	ASTM D5185m	>200	0	---
Tin	ppm	ASTM D5185m	>10	0	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---
Barium	ppm	ASTM D5185m		0	---
Molybdenum	ppm	ASTM D5185m		0	---
Manganese	ppm	ASTM D5185m		<1	---
Magnesium	ppm	ASTM D5185m		0	---
Calcium	ppm	ASTM D5185m		0	---
Phosphorus	ppm	ASTM D5185m		732	---
Zinc	ppm	ASTM D5185m		243	---
Sulfur	ppm	ASTM D5185m		632	---

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	▲ 75	---
Sodium	ppm	ASTM D5185m		11	---
Potassium	ppm	ASTM D5185m	>20	0	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.73	---



OIL ANALYSIS REPORT

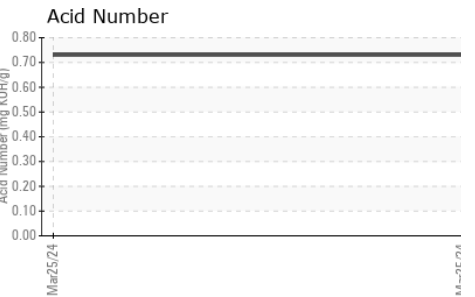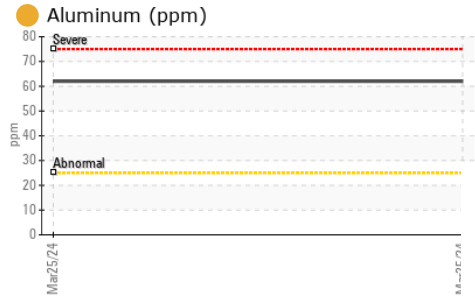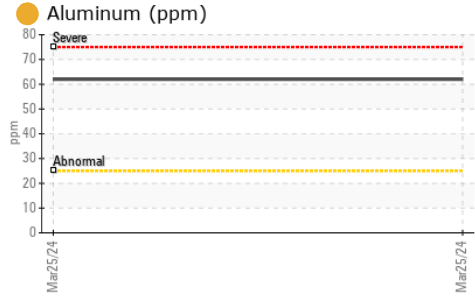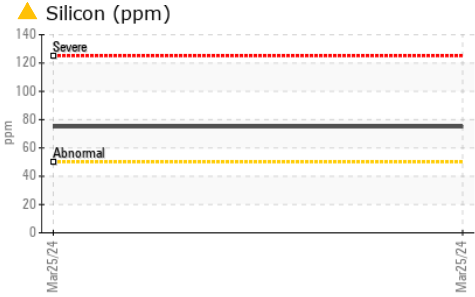





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	222	109	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

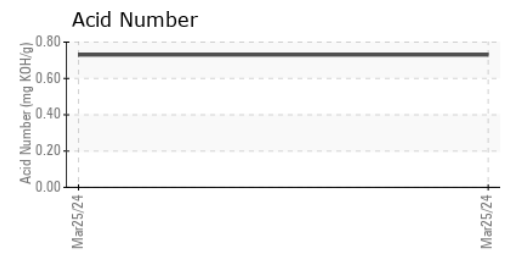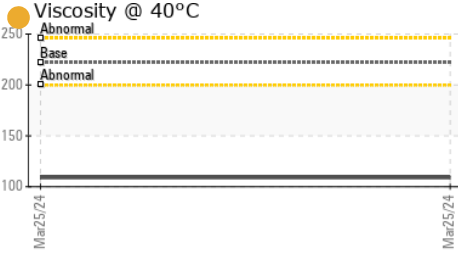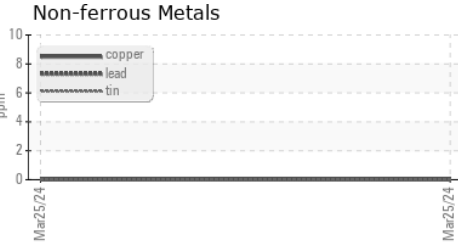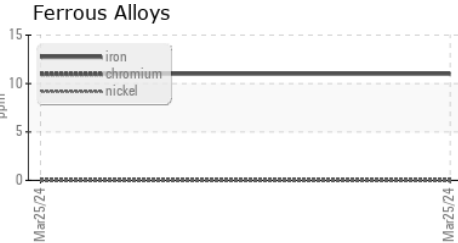

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06133539 **Received** : 29 Mar 2024
Lab Number : 06133539 **Tested** : 01 Apr 2024
Unique Number : 10953004 **Diagnosed** : 03 Apr 2024 - Don Baldrige
Test Package : IND 2

MOMAR Incorporated
 P.O. Box 19567
 Atlanta, GA
 US 30325
 Contact: JOHN STEED
 john.steed@momar.com
 T: (404)355-4580
 F: (678)894-4204

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)