




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

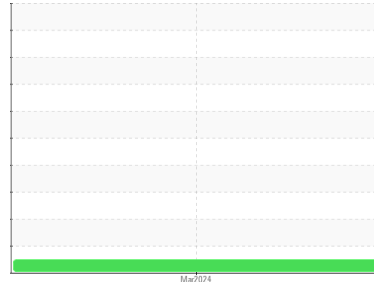

Machine Id
MACK ANTHEM 5594 (S/N 1M1AN3G44PM038871)
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0878910	---	---
Sample Date	Client Info		27 Mar 2024	---	---
Machine Age	mls	Client Info	22289	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	64	---	---
Chromium	ppm	ASTM D5185m >20	1	---	---
Nickel	ppm	ASTM D5185m >5	6	---	---
Titanium	ppm	ASTM D5185m >2	<1	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >20	18	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	302	---	---
Tin	ppm	ASTM D5185m >15	5	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 269	34	---	---
Barium	ppm	ASTM D5185m	<1	---	---
Molybdenum	ppm	ASTM D5185m 0	111	---	---
Manganese	ppm	ASTM D5185m	4	---	---
Magnesium	ppm	ASTM D5185m 20	582	---	---
Calcium	ppm	ASTM D5185m 1521	1687	---	---
Phosphorus	ppm	ASTM D5185m 948	790	---	---
Zinc	ppm	ASTM D5185m 893	948	---	---
Sulfur	ppm	ASTM D5185m	2255	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	45	---	---
Sodium	ppm	ASTM D5185m	5	---	---
Potassium	ppm	ASTM D5185m >20	54	---	---

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.6	---	---
Nitration	Abs/cm	*ASTM D7624 >20	12.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.6	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	25.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	4.9	---	---











OIL ANALYSIS REPORT

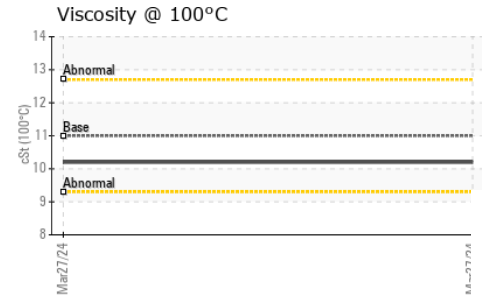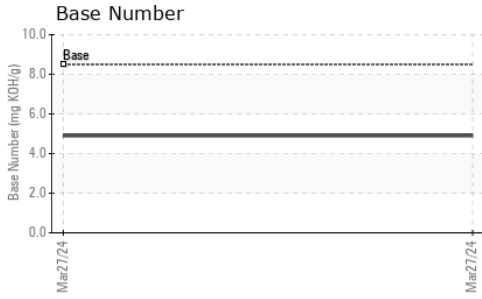

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	---	---
Precipitate	scalar	*Visual	NONE	---	---
Silt	scalar	*Visual	NONE	---	---
Debris	scalar	*Visual	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	---	---
Appearance	scalar	*Visual	NORML	---	---
Odor	scalar	*Visual	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	---	---
Free Water	scalar	*Visual	---	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.0	10.2	---

GRAPHS

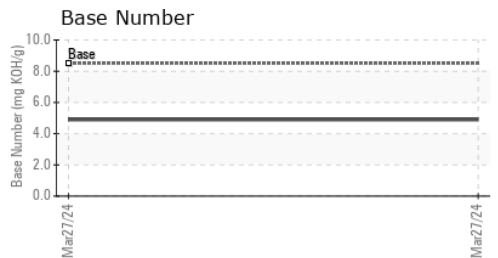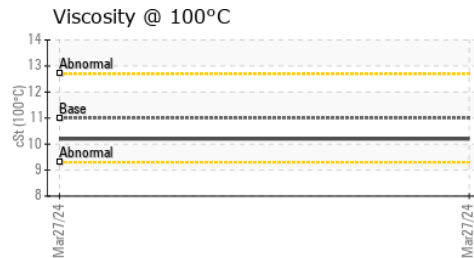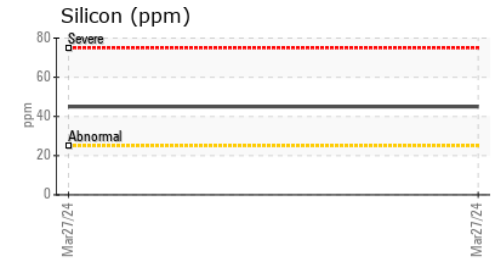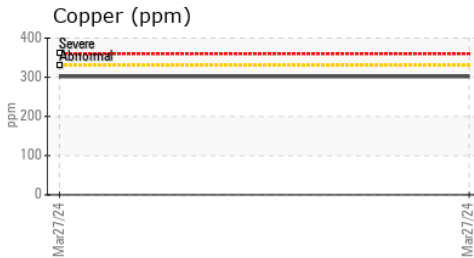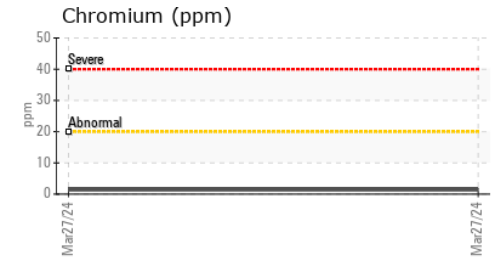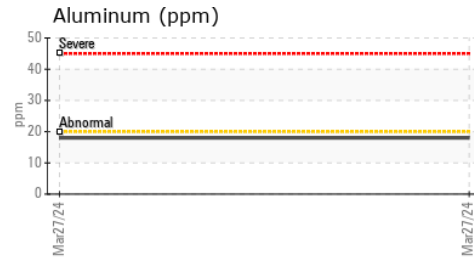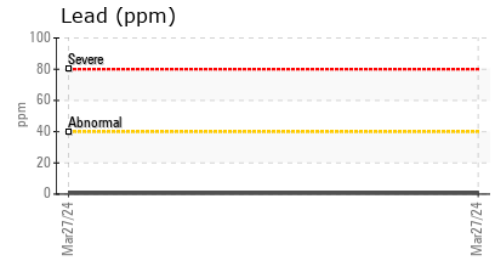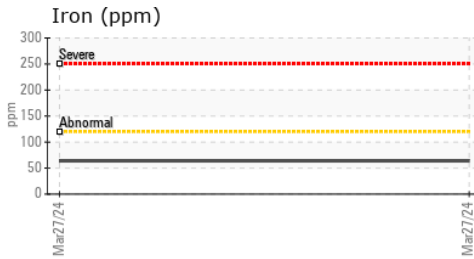

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0878910 **Received** : 29 Mar 2024
Lab Number : 06133895 **Tested** : 01 Apr 2024
Unique Number : 10953360 **Diagnosed** : 03 Apr 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

JOHNSON BREEDERS
 3425 HWY 117N
 ROSE HILL, NC
 US 28458
 Contact: GREG JONES
 gregory.jones@houseofraeford.com
 T: (910)289-6884
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)