




OIL ANALYSIS REPORT

Sample Rating Trend

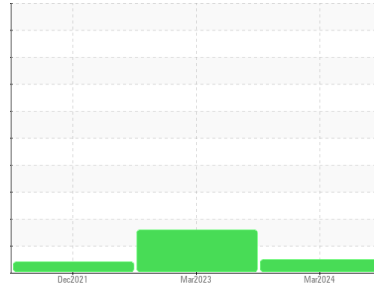

NORMAL



Machine Id
7929831 (S/N 1070)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KC126157	KC106818	KC100485
Sample Date	Client Info			15 Mar 2024	03 Mar 2023	03 Dec 2021
Machine Age	hrs	Client Info		21515	12565	2064
Oil Age	hrs	Client Info		0	10501	2064
Oil Changed	Client Info			N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	17	24	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	16
Barium	ppm	ASTM D5185m	90	0	0	46
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	10	15	74
Calcium	ppm	ASTM D5185m	2	1	0	5
Phosphorus	ppm	ASTM D5185m		1	0	0
Zinc	ppm	ASTM D5185m		49	32	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	4
Sodium	ppm	ASTM D5185m		14	4	24
Potassium	ppm	ASTM D5185m	>20	4	2	10
Water	%	ASTM D6304	>0.05	0.009	0.010	0.014
ppm Water	ppm	ASTM D6304	>500	94	108.6	144.6

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1894	7930	2925
Particles >6µm		ASTM D7647	>1300	636	▲ 3518	1051
Particles >14µm		ASTM D7647	>80	57	▲ 310	● 109
Particles >21µm		ASTM D7647	>20	9	▲ 56	16
Particles >38µm		ASTM D7647	>4	0	4	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	18/16/13	▲ 20/19/15	● 17/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37	0.33	0.383

OIL ANALYSIS REPORT

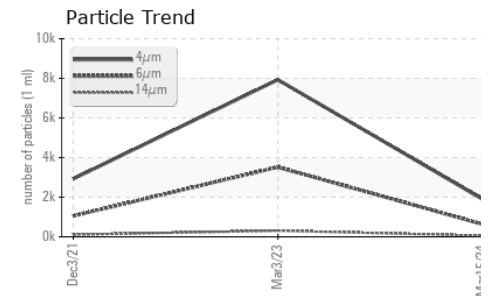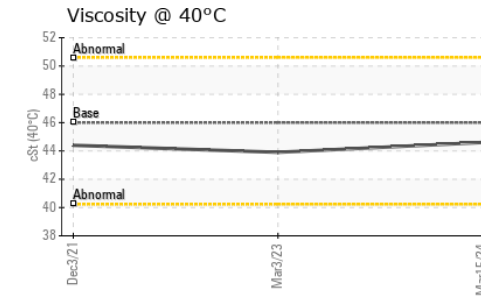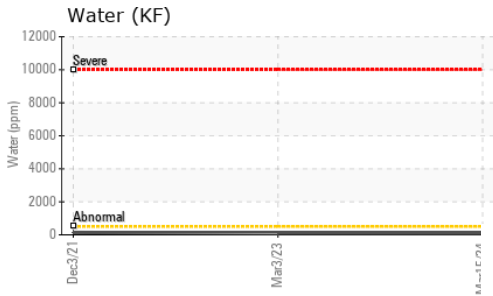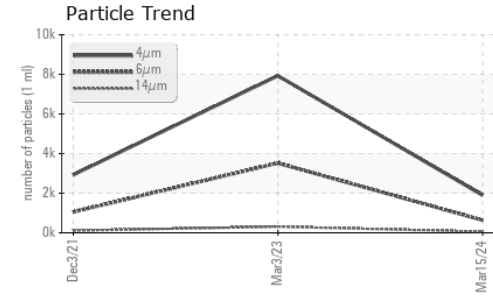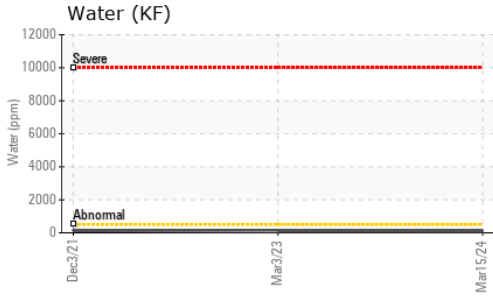


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.6	43.9	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



Color



Bottom



GRAPHS

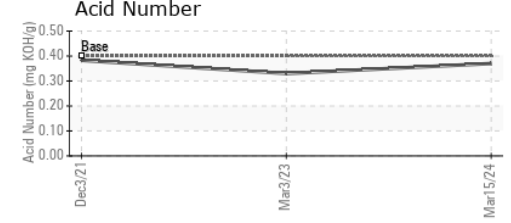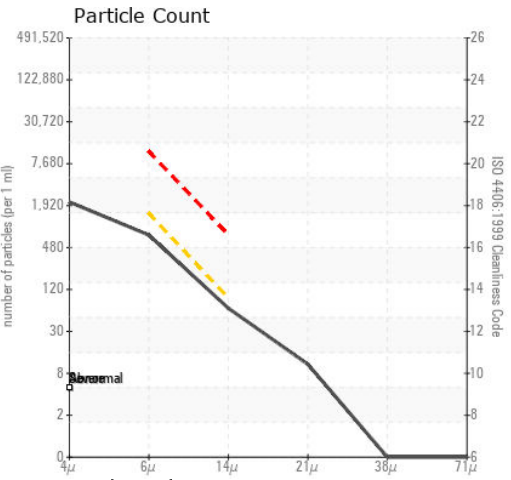

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KC126157
 Lab Number : 06134029
 Unique Number : 10953494
 Test Package : IND 2
 Received : 29 Mar 2024
 Tested : 01 Apr 2024
 Diagnosed : 03 Apr 2024 - Don Baldrige

ARCHITECTURAL WINDOWS
 359 VETERANS BLVD
 RUTHERFORD, NJ
 AE
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: