




# OIL ANALYSIS REPORT

Sample Rating Trend

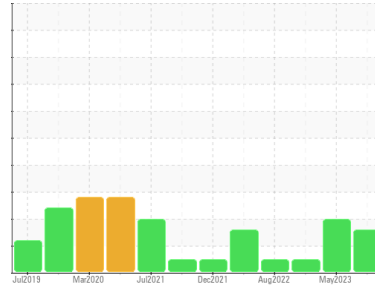

ISO



Machine Id  
**PETERBILT TK9743**

Component  
**Diesel Engine**

Fluid  
**SHELL ROTELLA T 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: Customer requests id change to reflect TK9743 )

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0857786</b>	WC0793367	WC0779699
Sample Date	Client Info		<b>18 Mar 2024</b>	28 May 2023	23 Feb 2023
Machine Age	hrs	Client Info	<b>8948</b>	7790	6952
Oil Age	hrs	Client Info	<b>4356</b>	3198	1955
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>ATTENTION</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>129</b>	77	43
Chromium	ppm	ASTM D5185m >5	<b>3</b>	2	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>16</b>	11	10
Lead	ppm	ASTM D5185m >150	<b>25</b>	25	26
Copper	ppm	ASTM D5185m >90	<b>10</b>	8	7
Tin	ppm	ASTM D5185m >5	<b>3</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 316	<b>4</b>	6	12
Barium	ppm	ASTM D5185m 0.0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 1.2	<b>48</b>	38	31
Manganese	ppm	ASTM D5185m	<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m 24	<b>704</b>	563	469
Calcium	ppm	ASTM D5185m 2292	<b>1666</b>	1654	1735
Phosphorus	ppm	ASTM D5185m 1064	<b>1096</b>	1009	962
Zinc	ppm	ASTM D5185m 1160	<b>1206</b>	1112	1161
Sulfur	ppm	ASTM D5185m 4996	<b>3418</b>	3306	3411

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>14</b>	8	6
Sodium	ppm	ASTM D5185m	<b>21</b>	13	5
Potassium	ppm	ASTM D5185m >20	<b>35</b>	26	19


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.7</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>17.7</b>	14.4	13.0
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>34.4</b>	33.5	29.0




# OIL ANALYSIS REPORT


### Particle Trend

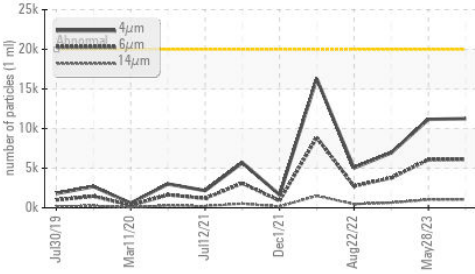


### Particle Trend

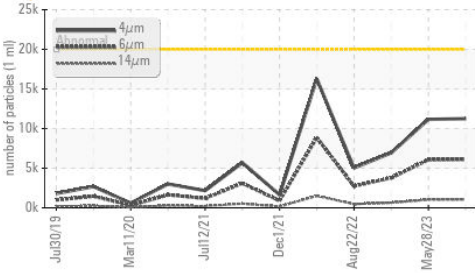

### Base Number

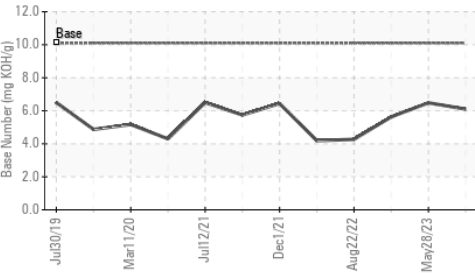

### Viscosity @ 100°C

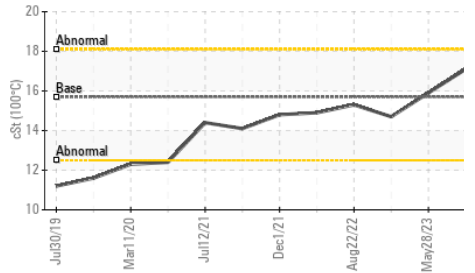

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>11249</b>	11162	6934
Particles >6µm	ASTM D7647	>5000	<b>6128</b>	6080	3777
Particles >14µm	ASTM D7647	>640	<b>1043</b>	1035	643
Particles >21µm	ASTM D7647	>160	<b>351</b>	349	217
Particles >38µm	ASTM D7647	>40	<b>54</b>	54	33
Particles >71µm	ASTM D7647	>10	<b>6</b>	5	3
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>21/20/17</b>	21/20/17	20/19/17


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>45.9</b>	43.3	31.9
Base Number (BN)	mg KOH/g ASTM D2896	10.1	<b>6.10</b>	6.48	5.63

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>LIGHT</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.7	<b>17.1</b>	15.9	14.7

### GRAPHS


#### Ferrous Alloys

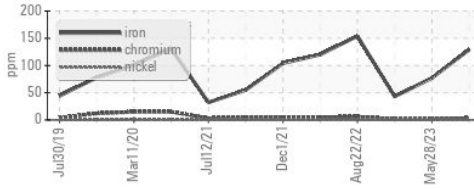


#### Non-ferrous Metals

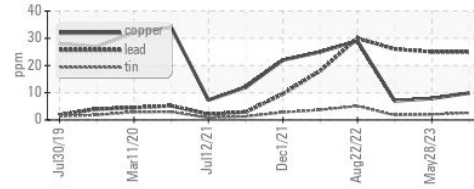


#### Viscosity @ 100°C

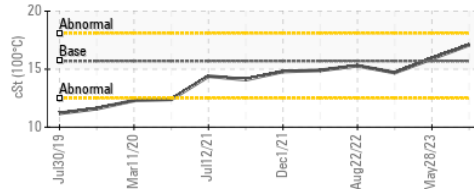

#### Particle Count

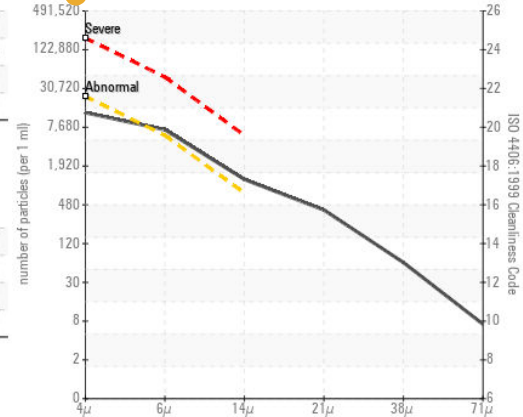

#### Base Number

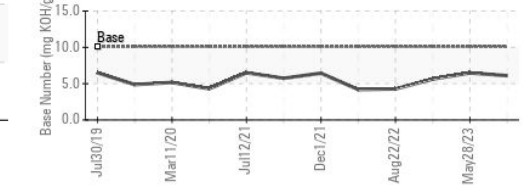

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0857786

Lab Number : 06134199

Unique Number : 10953664

Test Package : MOB 2 ( Additional Tests: PrtCount )

Received : 29 Mar 2024

Tested : 03 Apr 2024

Diagnosed : 03 Apr 2024 - Sean Felton

MCPAHAN WELDING SERVICE LTD

269 US HWY 183 SOUTH

CUERO, TX

US 77954

Contact: BILL FOJTIK

info@mcmahanservices.com

T: (361)275-0111

F: (361)275-0110

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)