


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

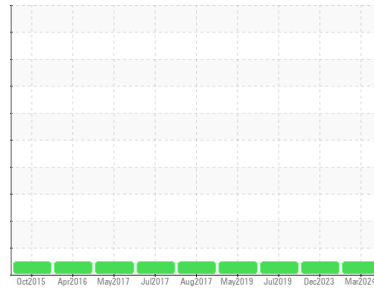

Area
DE Samples - CAT LAB
 Machine Id
KOMATSU 605 HAUL TRUCK 6524 (S/N 10126)
 Component
Diesel Engine
 Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10003358	TO10002835	TO1006657
Sample Date	Client Info			22 Mar 2024	04 Dec 2023	12 Jul 2019
Machine Age	hrs	Client Info		32318	32318	25900
Oil Age	hrs	Client Info		574	496	300
Oil Changed	Client Info			Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	10	9	8
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	<1	1
Lead	ppm	ASTM D5185m	>40	3	2	0
Copper	ppm	ASTM D5185m	>330	<1	1	1
Tin	ppm	ASTM D5185m	>15	<1	0	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	14	9
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	65	64	60	59
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1060	987	951	957
Calcium	ppm	ASTM D5185m	1140	1182	1113	1166
Phosphorus	ppm	ASTM D5185m	1170	1120	938	990
Zinc	ppm	ASTM D5185m	1230	1292	1300	1158
Sulfur	ppm	ASTM D5185m	3130	3822	3576	2829

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	3	4
Sodium	ppm	ASTM D5185m		0	<1	3
Potassium	ppm	ASTM D5185m	>20	2	0	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	6.7	6.6	5.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0	19.9	18.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	14.2	12.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	10.23	10.07	9.10









OIL ANALYSIS REPORT

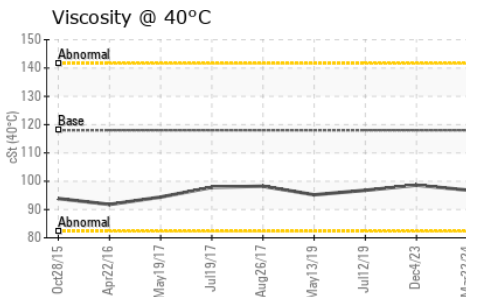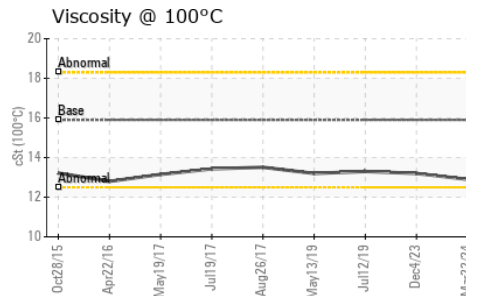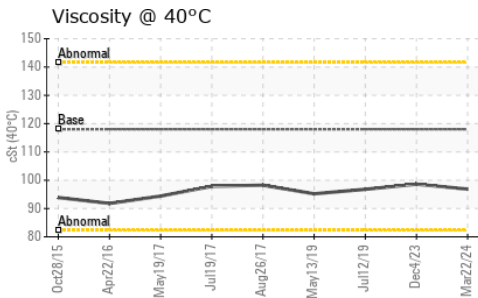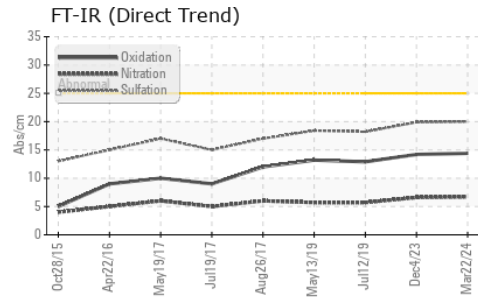

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	118	96.85	98.6
Visc @ 100°C	cSt	ASTM D445	15.9	12.9	13.2
Viscosity Index (VI)	Scale	ASTM D2270	143	129	132

GRAPHS

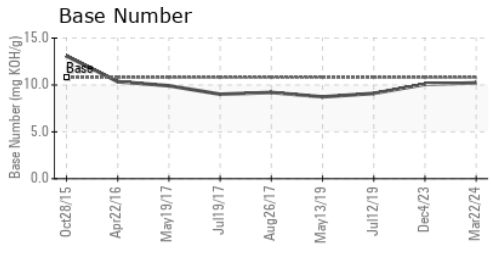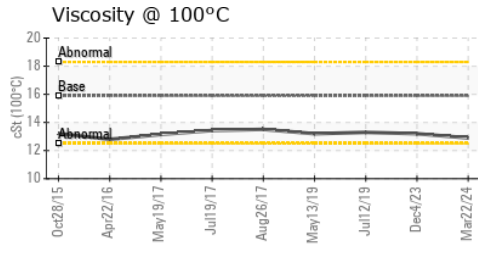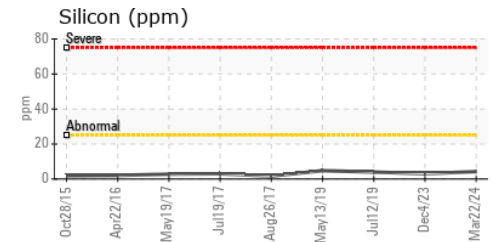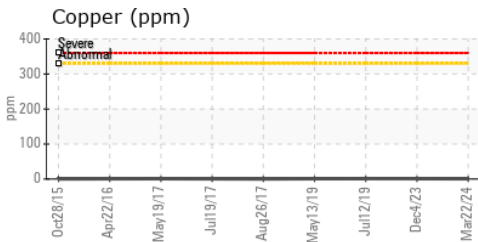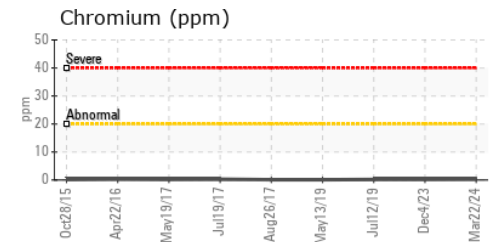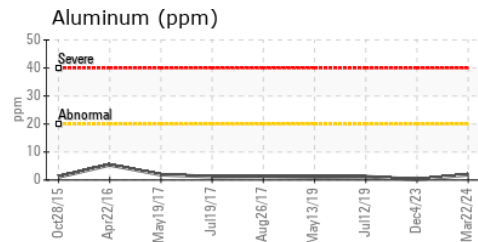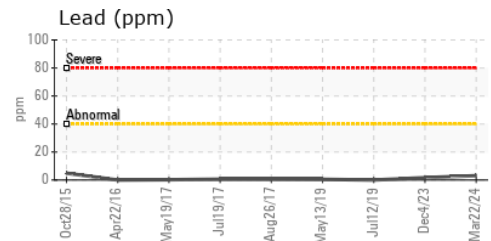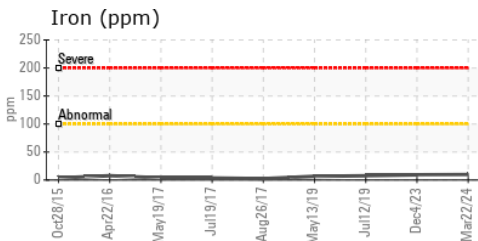

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003358
Lab Number : 06134207
Unique Number : 10953672
Test Package : MOB 2 (Additional Tests: KV40, VI)

Received : 29 Mar 2024
Tested : 05 Apr 2024
Diagnosed : 05 Apr 2024 - Wes Davis

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: DAVID MORRIS
 dmorris@anchorstoneco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)