


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

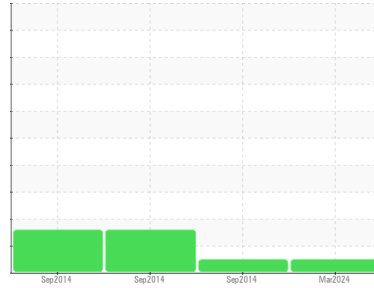

Machine Id
VOLVO A30D 74469
 Component
Rear Right Final Drive
 Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Switched to 75w-80 GO102)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ML0000950	VCP167421	VCP167423
Sample Date	Client Info			27 Mar 2024	29 Sep 2014	29 Sep 2014
Machine Age	hrs	Client Info		7611	4242	4242
Oil Age	hrs	Client Info		3369	4000	4000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>900	119	537	549
Chromium	ppm	ASTM D5185m	>20	2	8	8
Nickel	ppm	ASTM D5185m	>10	1	7	7
Titanium	ppm	ASTM D5185m		<1	2	2
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	<1	<1
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>150	8	47	43
Tin	ppm	ASTM D5185m	>20	<1	0	2
Antimony	ppm	ASTM D5185m	>5	---	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	111	61	<1	1
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.9	2	0	0
Manganese	ppm	ASTM D5185m	0.0	2	15	14
Magnesium	ppm	ASTM D5185m	39	22	0	0
Calcium	ppm	ASTM D5185m	93	58	10	3
Phosphorus	ppm	ASTM D5185m	920	792	1002	919
Zinc	ppm	ASTM D5185m	104	31	12	9
Sulfur	ppm	ASTM D5185m	20179	23309	30056	36359

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	4	7	3
Sodium	ppm	ASTM D5185m		<1	2	1
Potassium	ppm	ASTM D5185m	>20	1	10	2

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT



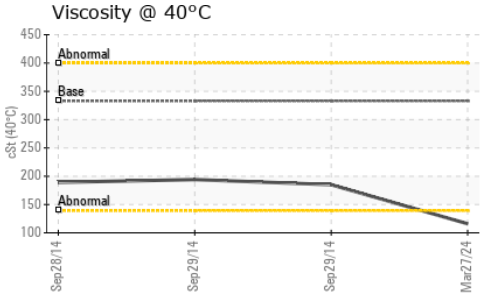


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 333	116	185.0	● 194.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

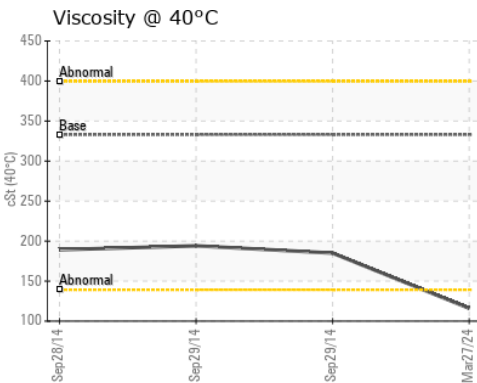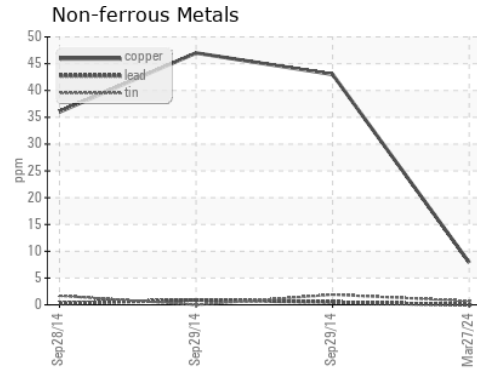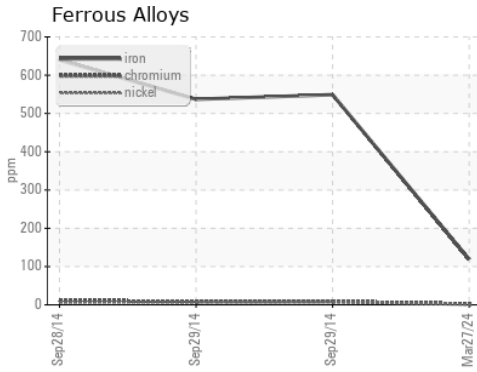

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0000950
Lab Number : 06134253
Unique Number : 10953718
Test Package : CONST

Received : 29 Mar 2024
Tested : 01 Apr 2024
Diagnosed : 03 Apr 2024 - Sean Felton

McCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFFE
 KRATLIFFE@MCCLUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (804)266-1611