



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**TOTE 75**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you filter this fluid before use.

### Wear

All wear metals are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>TLC0001656</b>	---	---
Sample Date	Client Info	<b>31 Mar 2024</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>5	<b>1</b>	---	---
Chromium ppm ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel ppm ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Silver ppm ASTM D5185m	>5	<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>5	<b>2</b>	---	---
Lead ppm ASTM D5185m	>5	<b>&lt;1</b>	---	---
Copper ppm ASTM D5185m	>5	<b>&lt;1</b>	---	---
Tin ppm ASTM D5185m	>5	<b>&lt;1</b>	---	---
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium ppm ASTM D5185m		<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>78</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>44</b>	---	---
Manganese ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium ppm ASTM D5185m		<b>157</b>	---	---
Calcium ppm ASTM D5185m		<b>1228</b>	---	---
Phosphorus ppm ASTM D5185m		<b>606</b>	---	---
Zinc ppm ASTM D5185m		<b>691</b>	---	---
Sulfur ppm ASTM D5185m		<b>3259</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>8</b>	---	---
Sodium ppm ASTM D5185m		<b>3</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>5</b>	---	---
Water % ASTM D6304		<b>NEG</b>	---	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>▲ 204519</b>	---	---
Particles >6µm ASTM D7647	>1300	<b>▲ 96358</b>	---	---
Particles >14µm ASTM D7647	>160	<b>▲ 1711</b>	---	---
Particles >21µm ASTM D7647	>40	<b>▲ 66</b>	---	---
Particles >38µm ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>▲ 25/24/18</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>1.49</b>	---	---



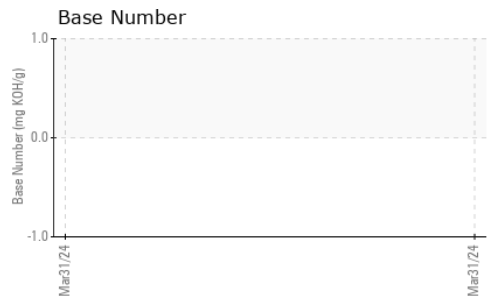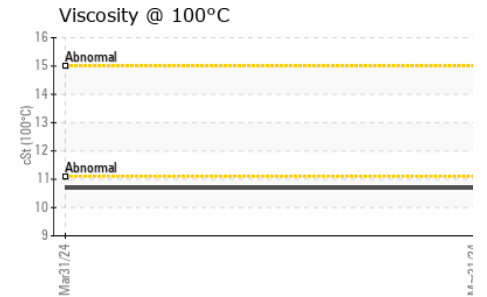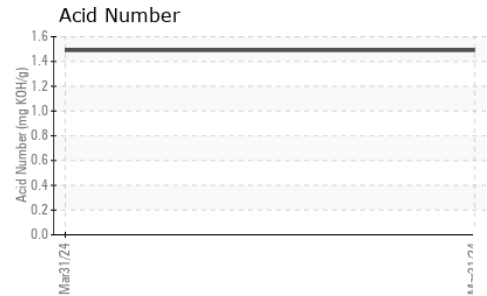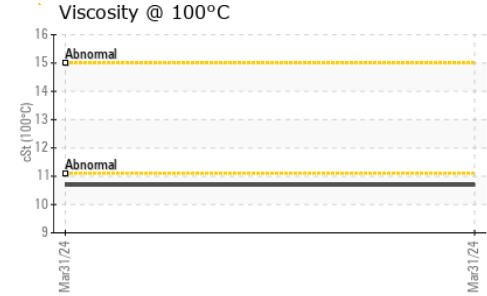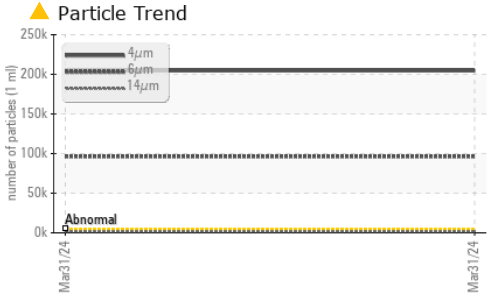

# OIL ANALYSIS REPORT





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67.62	---	---
Visc @ 100°C	cSt	ASTM D445	10.69	---	---
Viscosity Index (VI)	Scale	ASTM D2270	147	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

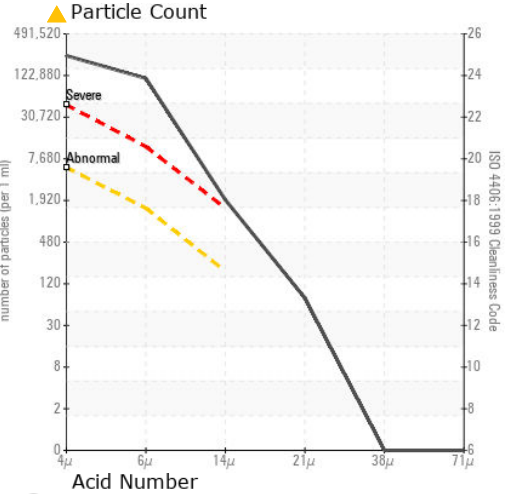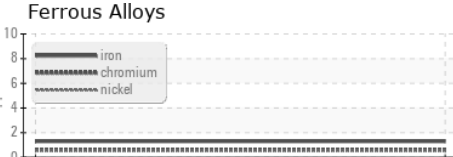

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TLC0001656      **Received** : 29 Mar 2024  
**Lab Number** : 06134319      **Tested** : 08 Apr 2024  
**Unique Number** : 10953784      **Diagnosed** : 08 Apr 2024 - Doug Bogart  
**Test Package** : PLANT ( Additional Tests: FT-IR, KV100, TBN, VI )

**SUPPLY PRO**  
 115 EMPIRE WAY  
 ATLANTA, GA  
 US 30354  
 Contact: MICHAEL JACKSON  
 mjackson@supplypro1.com  
 T: (470)991-1693  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)