




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
614
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

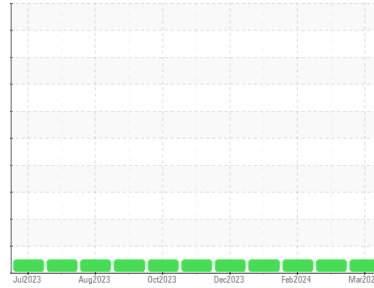

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			AK0000012	AK0000032	AK0000107
Sample Date	Client Info			27 Mar 2024	05 Mar 2024	01 Feb 2024
Machine Age	mls Client Info			656160	646014	635877
Oil Age	mls Client Info			42081	31935	0
Oil Changed	Client Info			Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	77	66	54
Chromium	ppm	ASTM D5185m	>20	4	4	3
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	3	3	2
Lead	ppm	ASTM D5185m	>40	1	1	<1
Copper	ppm	ASTM D5185m	>330	<1	0	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		1	<1	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		61	59	60
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		961	960	972
Calcium	ppm	ASTM D5185m		1073	1024	1001
Phosphorus	ppm	ASTM D5185m		1037	1050	1074
Zinc	ppm	ASTM D5185m		1255	1259	1283
Sulfur	ppm	ASTM D5185m		3063	2719	2930

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	3
Sodium	ppm	ASTM D5185m		<1	1	1
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Fuel	%	ASTM D3524	>3.0	<1.0	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.4	9.6	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.0	27.2	25.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.9	24.5	22.8
Base Number (BN)	mg KOH/g	ASTM D2896		5.1	8.14	7.4









OIL ANALYSIS REPORT

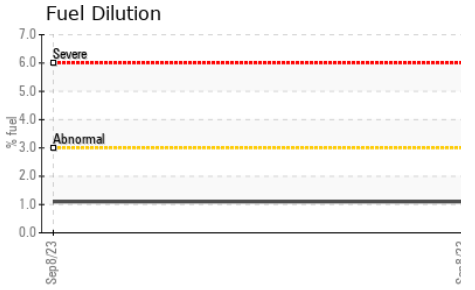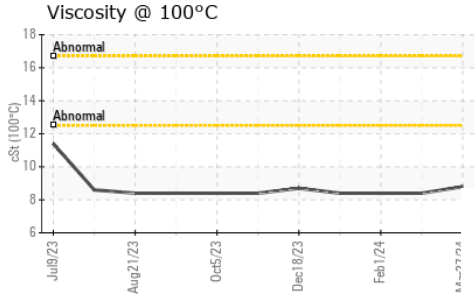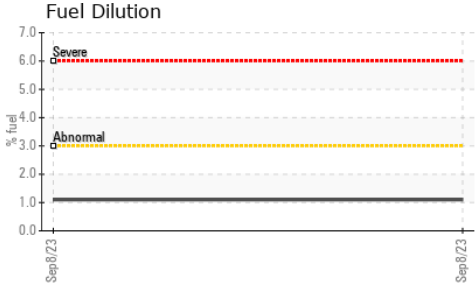

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	8.8	8.4	8.4

GRAPHS

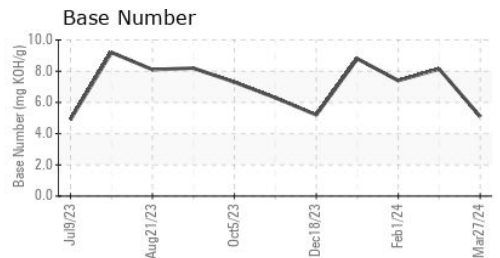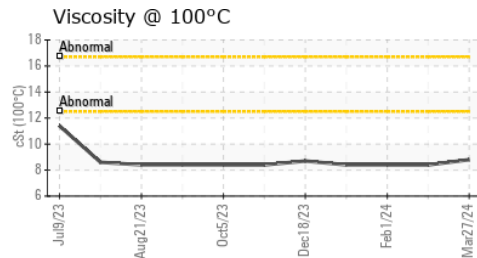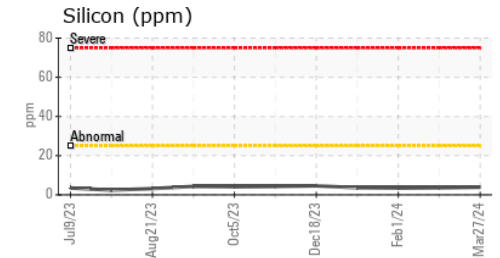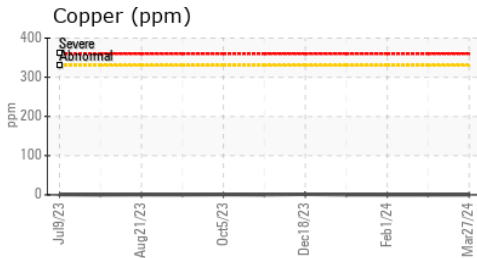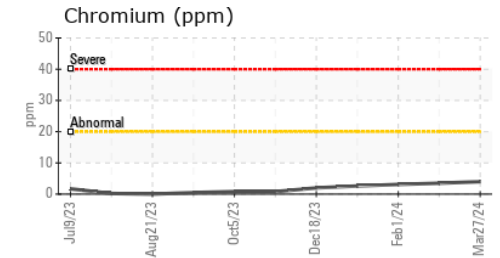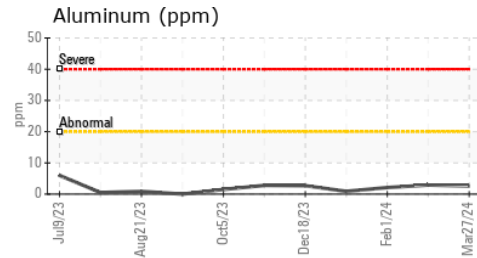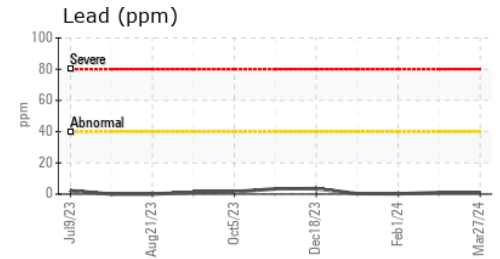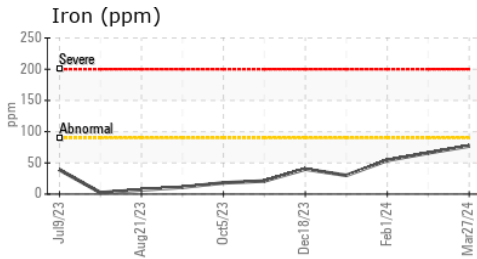

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AK0000012 **Received** : 01 Apr 2024
Lab Number : **06134443** **Tested** : 02 Apr 2024
Unique Number : 10953908 **Diagnosed** : 03 Apr 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: FuelDilution, TBN)

MEYER LOGISTICS
 560 EAST 25TH ST
 JASPER, IN
 US 47546

Contact: KEN FROMME
 kenny.fromme@meyerdistributing.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (812)639-9224

F: