




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

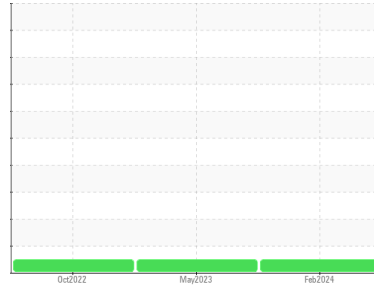

Machine Id

**22317**

Component

**Diesel Engine**

Fluid

**DIESOL ENGINE OIL SAE 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0832067</b>	WC0784082	WC0699806
Sample Date	Client Info		<b>22 Feb 2024</b>	12 May 2023	06 Oct 2022
Machine Age	mls	Client Info	<b>223571</b>	125336	40848
Oil Age	mls	Client Info	<b>223571</b>	50000	40848
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>42</b>	31	77
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	10	36
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	2
Copper	ppm	ASTM D5185m	>330	<b>2</b>	3	13
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>5</b>	4	20
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>76</b>	75	14
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m	450	<b>958</b>	913	820
Calcium	ppm	ASTM D5185m	3000	<b>1402</b>	1282	1528
Phosphorus	ppm	ASTM D5185m	1150	<b>1107</b>	1043	755
Zinc	ppm	ASTM D5185m	1350	<b>1352</b>	1285	1004
Sulfur	ppm	ASTM D5185m	4250	<b>3597</b>	3573	3540

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>13</b>	11	14
Sodium	ppm	ASTM D5185m		<b>2</b>	0	4
Potassium	ppm	ASTM D5185m	>20	<b>16</b>	22	95

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>14.9</b>	10.9	13.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>29.0</b>	23.5	26.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>27.0</b>	20.4	23.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>4.6</b>	6.4	6.5







# OIL ANALYSIS REPORT

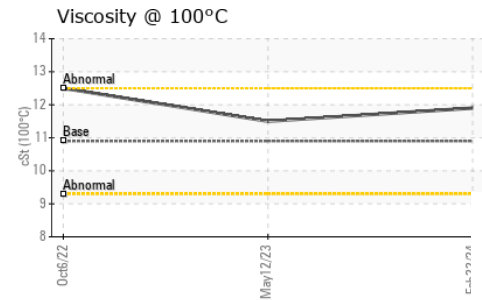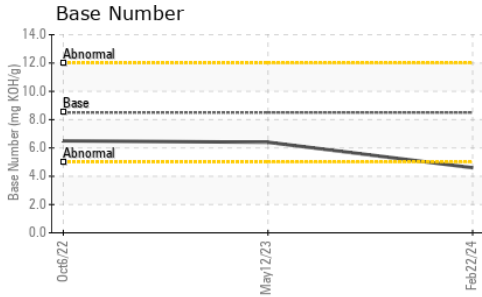

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>11.9</b>	11.5	12.5

## GRAPHS

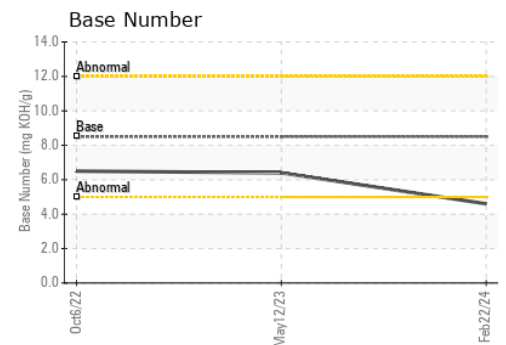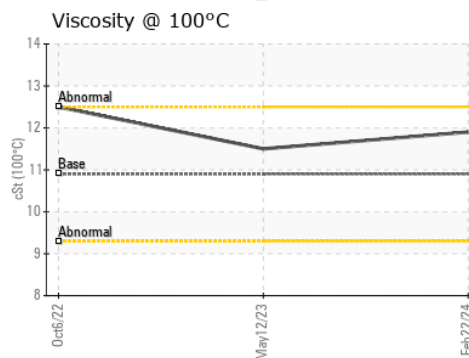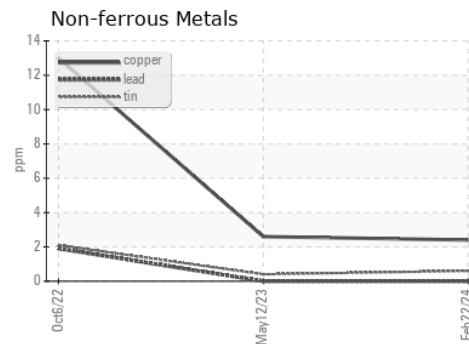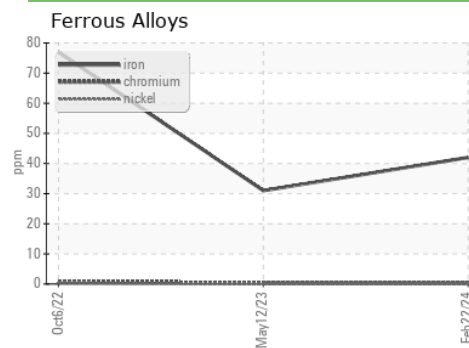

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0832067  
**Lab Number** : 06134459  
**Unique Number** : 10953924  
**Test Package** : FLEET  
**Received** : 01 Apr 2024  
**Tested** : 02 Apr 2024  
**Diagnosed** : 03 Apr 2024 - Sean Felton

**MID-ATLANTIC TRANSPORT**  
 38 IRONSIDE CT  
 WILLINGBORO, NJ  
 US 08046  
 Contact: GARY LAWYER  
 gary@midatlantictrans.com  
 T: (609)864-6948  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)