




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

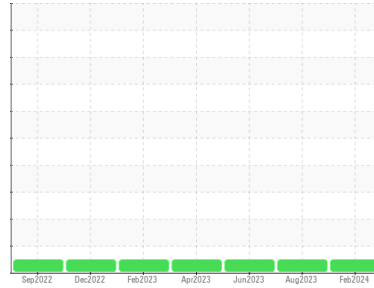

Machine Id
22318

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0901342 | WC0832052 | WC05952475 |
| Sample Date | Client Info | | 28 Feb 2024 | 25 Aug 2023 | 27 Jun 2023 |
| Machine Age | mls | Client Info | 379871 | 284615 | 237643 |
| Oil Age | mls | Client Info | 379871 | 50000 | 50000 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 33 | 18 | 6 |
| Chromium | ppm | ASTM D5185m >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m >4 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m >3 | <1 | <1 | <1 |
| Aluminum | ppm | ASTM D5185m >20 | 5 | 5 | 1 |
| Lead | ppm | ASTM D5185m >40 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m >330 | 2 | 2 | <1 |
| Tin | ppm | ASTM D5185m >15 | <1 | <1 | 1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | <1 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 250 | 12 | 12 | 2 |
| Barium | ppm | ASTM D5185m 10 | 0 | 0 | 44 |
| Molybdenum | ppm | ASTM D5185m 100 | 82 | 94 | 59 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185m 450 | 937 | 906 | 925 |
| Calcium | ppm | ASTM D5185m 3000 | 1221 | 1359 | 1000 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1023 | 1078 | 962 |
| Zinc | ppm | ASTM D5185m 1350 | 1251 | 1411 | 1200 |
| Sulfur | ppm | ASTM D5185m 4250 | 3224 | 3153 | 3449 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 15 | 10 | 7 |
| Sodium | ppm | ASTM D5185m | 2 | 2 | 3 |
| Potassium | ppm | ASTM D5185m >20 | 10 | 6 | 4 |

INFRA-RED



| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.6 | 0.4 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 12.9 | 11.5 | 7.8 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 25.7 | 24.4 | 18.4 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 23.9 | 20.3 | 14.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896 8.5 | 5.0 | 5.7 | 9.4 |







OIL ANALYSIS REPORT

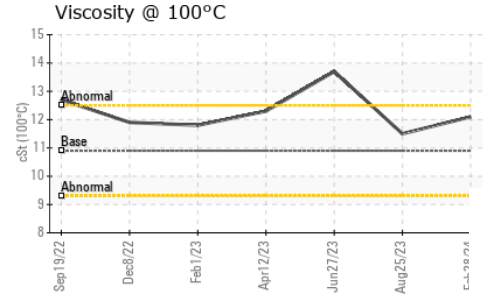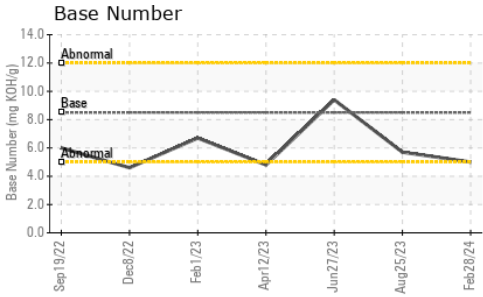

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 10.9 | 12.1 | 11.5 | 13.7 |

GRAPHS

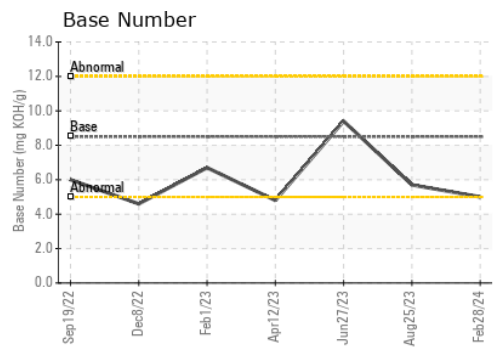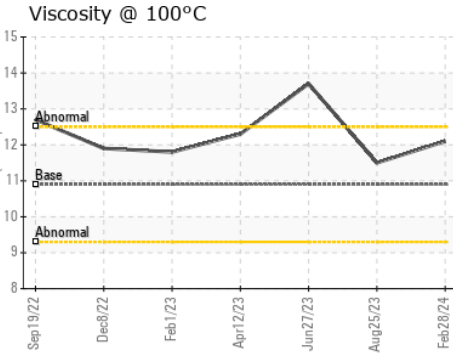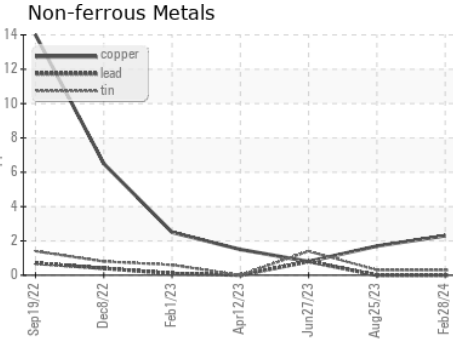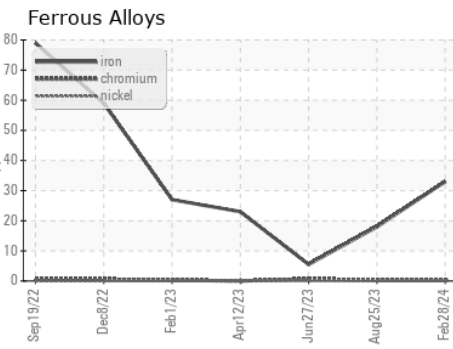

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0901342
Lab Number : 06134465
Unique Number : 10953930
Test Package : FLEET
Received : 01 Apr 2024
Tested : 02 Apr 2024
Diagnosed : 02 Apr 2024 - Wes Davis

MID-ATLANTIC TRANSPORT
 38 IRONSIDE CT
 WILLINGBORO, NJ
 US 08046
 Contact: GARY LAWYER
 gary@midatlantictrans.com
 T: (609)864-6948
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)