



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id

**LT217**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PE0003949</b>	---	---
Sample Date	Client Info		<b>12 Mar 2024</b>	---	---
Machine Age	mls	Client Info	<b>300207</b>	---	---
Oil Age	mls	Client Info	<b>10000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>10</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>99</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>116</b>	---	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 100	<b>6</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 450	<b>423</b>	---	---
Calcium	ppm	ASTM D5185m 3000	<b>1886</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>960</b>	---	---
Zinc	ppm	ASTM D5185m 1350	<b>1252</b>	---	---
Sulfur	ppm	ASTM D5185m 4250	<b>4003</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m >216	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	---	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.4</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>6.9</b>	---	---





# OIL ANALYSIS REPORT

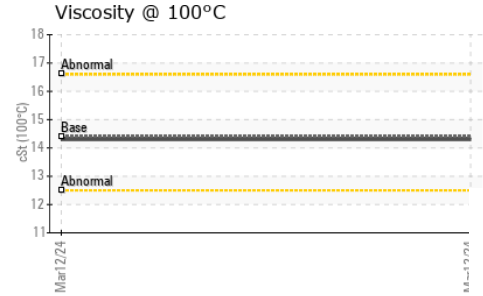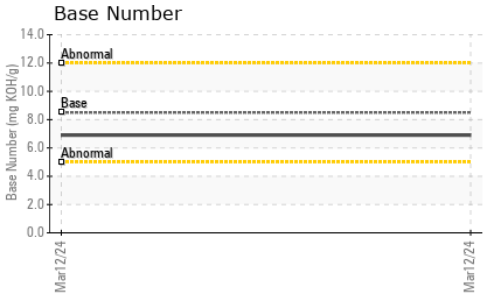

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	---

### GRAPHS

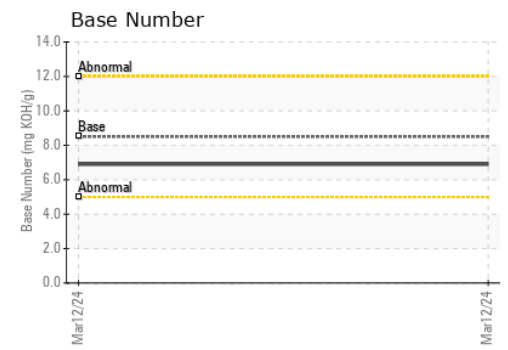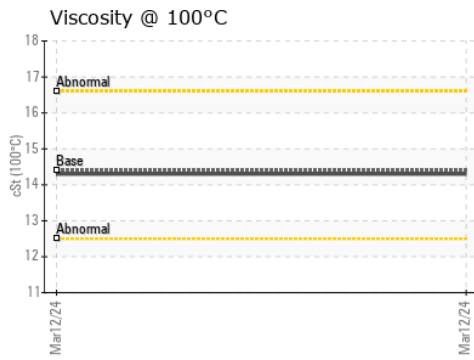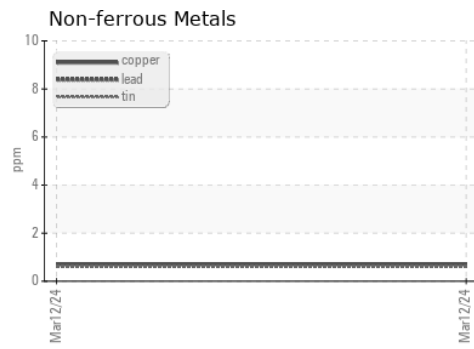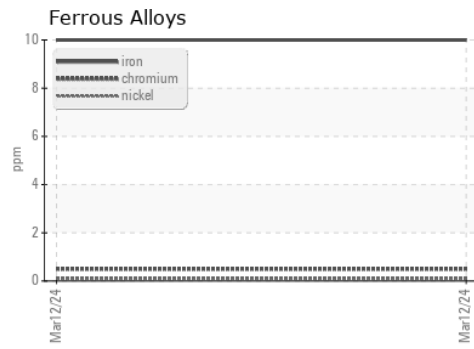

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0003949      **Received** : 01 Apr 2024  
**Lab Number** : **06134715**      **Tested** : 02 Apr 2024  
**Unique Number** : 10954180      **Diagnosed** : 03 Apr 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN )

**JANICKI LOGGING AND CONSTRUCTION**  
 34280 STATE ROUTE 20  
 SEDRO WOOLLEY, WA  
 US 98255  
 Contact: TYLER DELLINGER  
 tdellinger@janickilogging.com  
 T: (360)853-5963  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)