




# OIL ANALYSIS REPORT

Sample Rating Trend

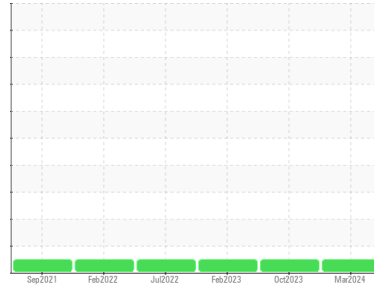

**NORMAL**



Area  
**[22415]**  
 Machine Id  
**40-201**

Component  
**Diesel Engine**  
 Fluid

**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0836157</b>   | WC0818747   | WC0754818   |
| Sample Date   | Client Info |             | <b>14 Mar 2024</b> | 10 Oct 2023 | 15 Feb 2023 |
| Machine Age   | hrs         | Client Info | <b>2397</b>        | 2122        | 1607        |
| Oil Age       | hrs         | Client Info | <b>275</b>         | 515         | 231         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >2.1       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.21      | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |    |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron     | ppm    | ASTM D5185m | >51     | <b>7</b>     | 9        | 5  |
| Chromium | ppm    | ASTM D5185m | >11     | <b>&lt;1</b> | <1       | 0  |
| Nickel   | ppm    | ASTM D5185m | >5      | <b>&lt;1</b> | <1       | 0  |
| Titanium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | <1       | <1 |
| Silver   | ppm    | ASTM D5185m | >3      | <b>0</b>     | 0        | 0  |
| Aluminum | ppm    | ASTM D5185m | >31     | <b>2</b>     | 4        | 1  |
| Lead     | ppm    | ASTM D5185m | >26     | <b>0</b>     | 0        | 0  |
| Copper   | ppm    | ASTM D5185m | >26     | <b>&lt;1</b> | <1       | 0  |
| Tin      | ppm    | ASTM D5185m | >4      | <b>&lt;1</b> | <1       | 0  |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | <1       | 0  |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | <1       | 0  |

## ADDITIVES

|            | method | limit/base  | current | history1     | history2 |      |
|------------|--------|-------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185m | 85      | <b>95</b>    | 54       | 79   |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m |         | <b>5</b>     | 55       | 4    |
| Manganese  | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 0        | <1   |
| Magnesium  | ppm    | ASTM D5185m | 350     | <b>720</b>   | 328      | 689  |
| Calcium    | ppm    | ASTM D5185m | 1800    | <b>1367</b>  | 1892     | 1349 |
| Phosphorus | ppm    | ASTM D5185m | 1000    | <b>948</b>   | 1214     | 999  |
| Zinc       | ppm    | ASTM D5185m | 1100    | <b>1202</b>  | 1294     | 1185 |
| Sulfur     | ppm    | ASTM D5185m | 3500    | <b>3905</b>  | 4507     | 3869 |

## CONTAMINANTS

|           | method | limit/base  | current | history1     | history2 |   |
|-----------|--------|-------------|---------|--------------|----------|---|
| Silicon   | ppm    | ASTM D5185m | >22     | <b>7</b>     | 6        | 5 |
| Sodium    | ppm    | ASTM D5185m | >31     | <b>&lt;1</b> | 4        | 4 |
| Potassium | ppm    | ASTM D5185m | >20     | <b>4</b>     | 4        | 2 |

## INFRA-RED



|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | *ASTM D7844 | >3      | <b>0.1</b>  | 0.2      | 0.2  |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>8.1</b>  | 9.7      | 8.3  |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>18.4</b> | 19.7     | 18.6 |

## FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |      |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>12.8</b> | 15.1     | 12.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.5     | <b>8.2</b>  | 7.0      | 8.8  |







# OIL ANALYSIS REPORT

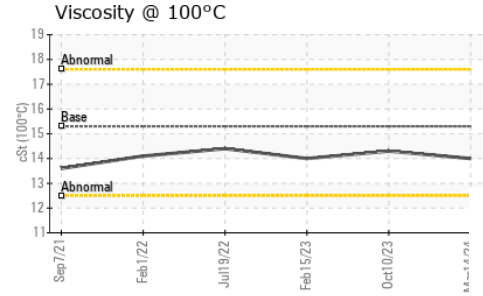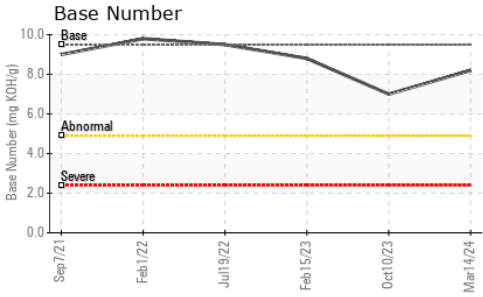

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.21   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.3    | <b>14.0</b> | 14.3     | 14.0 |

## GRAPHS

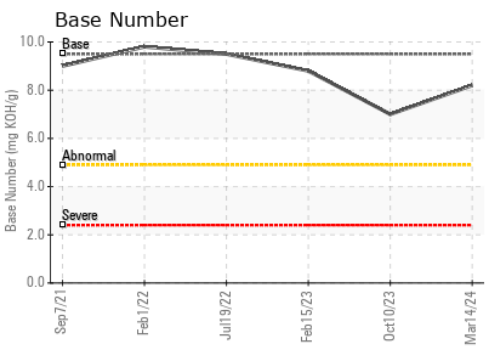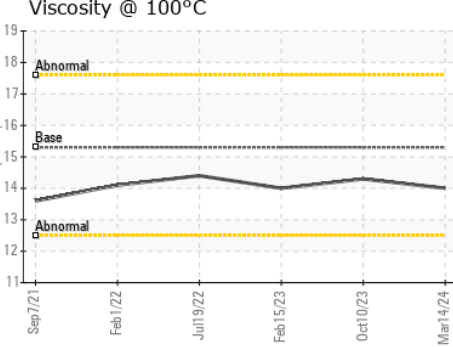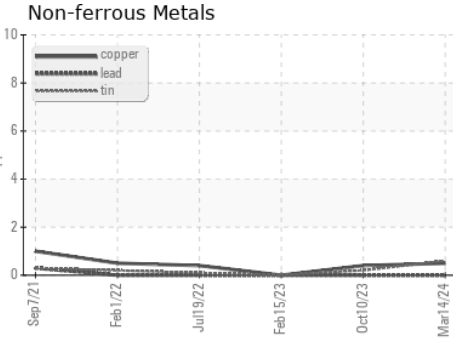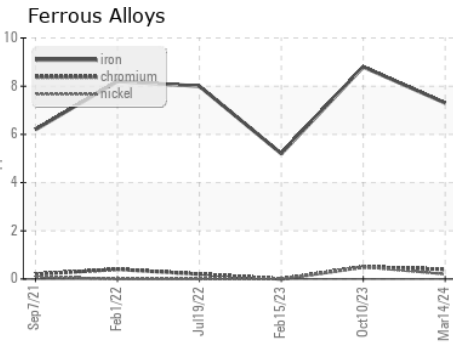

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0836157 **Received** : 01 Apr 2024  
**Lab Number** : **06134738** **Tested** : 02 Apr 2024  
**Unique Number** : 10954203 **Diagnosed** : 02 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com  
 T: (918)728-5749  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)