

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area WP29 Machine to MVR108-5 Effect Component Hydraulic System

Fluid MOBIL DTE 25 (93 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





2023 May2023 Aug2023 Sec2023 Nov2023 Dec2023 Jac2024 Feb2024


SAMPLE INFORM	MATION	method				history2	
Sample Number		Client Info		WC0875264	WC0875263	WC0859506	
Sample Date		Client Info		25 Mar 2024	18 Mar 2024	11 Mar 2024	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2	
Water		WC Method	>0.05	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<1	0	0	
Chromium	ppm	ASTM D5185m	>20	0	0	0	
Nickel	ppm	ASTM D5185m	>20	<1	0	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m		0	0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	0	
Lead	ppm	ASTM D5185m	>20	0	0	0	
Copper	ppm	ASTM D5185m	>20	0	0	0	
Tin	ppm	ASTM D5185m	>20	0	0	0	
Vanadium	ppm	ASTM D5185m	20	<1	0	<1	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m		0	0	0	
Calcium	ppm	ASTM D5185m		41	74	37	
Phosphorus	ppm	ASTM D5185m		346	261	289	
Zinc	ppm	ASTM D5185m		495	386	406	
Sulfur	ppm	ASTM D5185m		1142	935	928	
CONTAMINANTS	8	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	0	0	<1	
Sodium	ppm	ASTM D5185m		1	0	3	
Potassium	ppm	ASTM D5185m	>20	2	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>5000	259	412	512	
Particles >6µm		ASTM D7647	>1300	77	123	129	
Particles >14µm		ASTM D7647	>160	8	16	16	
Particles >21µm		ASTM D7647	>40	5	5	5	
Particles >38µm		ASTM D7647	>10	0	0	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10	16/14/11	16/14/11	
FLUID DEGRADA		method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		0.67	0.610	0.57	
7:07:07) Rev: 1				Submitted By: VINCENT MCINTIRE			


Report Id: LEPNEW [WUSCAR] 06134846 (Generated: 04/03/2024 17:07:07) Rev: 1


Submitted By: VINCENT MCINTIRE




OIL ANALYSIS REPORT

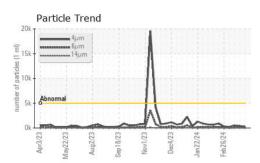


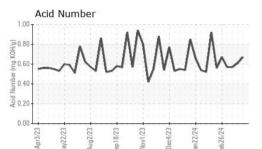





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.2	48.3	48.1	47.8
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						

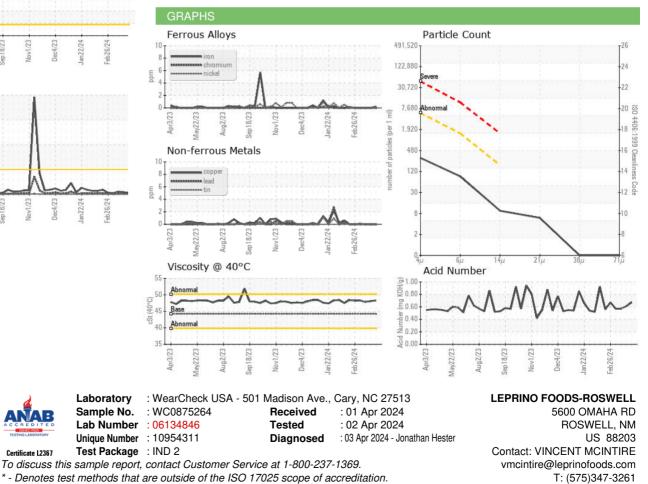

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: VINCENT MCINTIRE

Page 2 of 2

F: (505)347-5728