


## **OIL ANALYSIS REPORT**

Sample Rating Trend

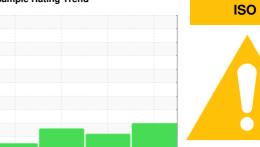

Machine Id

# KAESER SK 15 A/C 7236502 (S/N 1490)

Component Compressor

KAESER SIGMA (OEM) S-460 (10 GAL)

#### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Sep 202	2 Apr2023	0ct2023 N	lar2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC125857	KC123170	KC107938
Sample Date		Client Info		26 Mar 2024	12 Oct 2023	25 Apr 2023
Machine Age	hrs	Client Info		2847	2428	2152
Oil Age	hrs	Client Info		0	0	253
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	60	4	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	79	65	67
Calcium	ppm	ASTM D5185m	2	1	0	0
Phosphorus	ppm	ASTM D5185m		0	1	0
Zinc	ppm	ASTM D5185m		0	10	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	0	0
Sodium	ppm	ASTM D5185m		12	13	16
Potassium	ppm	ASTM D5185m	>20	3	3	0
Water	%	ASTM D6304	>0.05	0.013	0.021	0.020
ppm Water	ppm	ASTM D6304	>500	140	219.8	207.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		6351	6757	8338
Particles >6µm		ASTM D7647	>1300	<b>A</b> 3298	<u>▲</u> 2714	<b>△</b> 2786
Particles >14µm		ASTM D7647	>80	<b>A</b> 895	<u></u> 95	<b>276</b>
Particles >21µm		ASTM D7647	>20	<b>299</b>	18	<b>▲</b> 78
Particles >38µm		ASTM D7647	>4	<u>^</u> 5	1	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/19/17	<b>△</b> 20/19/14	<b>2</b> 0/19/15
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.38	0.39



### **OIL ANALYSIS REPORT**

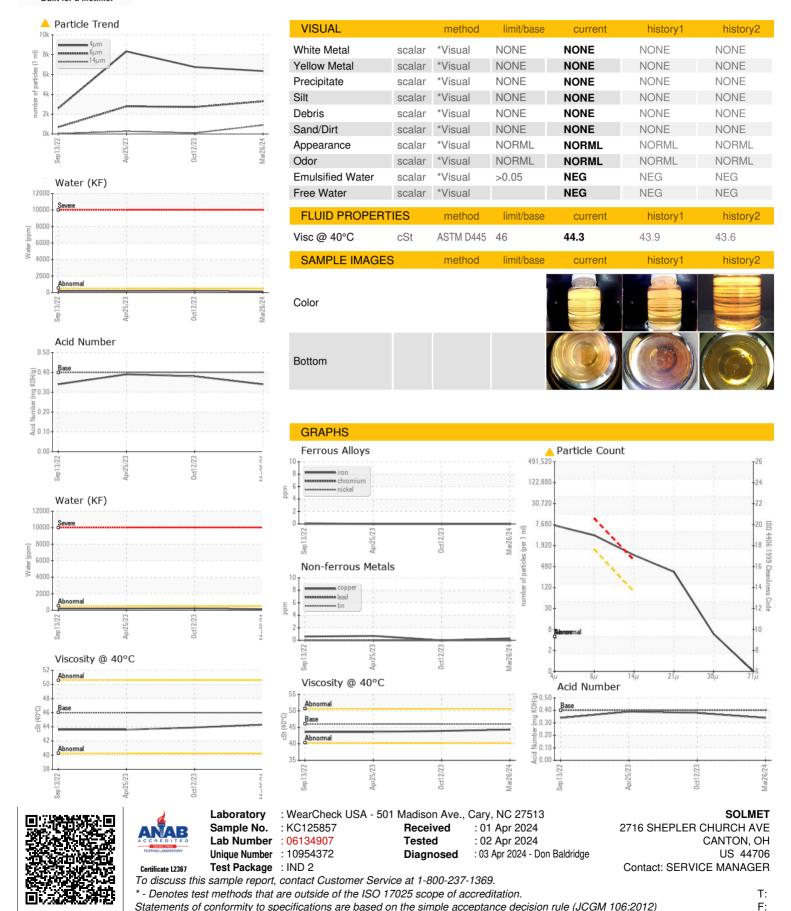

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)