

OIL ANALYSIS REPORT

Sample Rating Trend ISO

Machine Id **KAESER 7560386**

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- Kg)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC129876	KC101515	KC107969
Sample Date		Client Info		19 Mar 2024	05 May 2023	01 Dec 2022
Machine Age	hrs	Client Info		9974	6207	4417
Oil Age	hrs	Client Info		6891	3000	1400
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	3	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m		2	3	2
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	<1	0	12
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	1	11	50
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	11
Zinc	ppm	ASTM D5185m		<1	28	21
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	4	11
Potassium	ppm	ASTM D5185m	>20	2	3	4
Water	%	ASTM D6304		0.006	0.011	0.016
ppm Water	ppm	ASTM D6304		64	115.2	165.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		75577	5930	58334
Particles >6µm		ASTM D7647	>1300	A 34218	0 1528	▲ 23947
Particles >14µm		ASTM D7647	>80	A 3025	60	▲ 2148
Particles >21µm		ASTM D7647		▲ 557	7	▲ 358
Particles >38µm		ASTM D7647	>4	▲ 8	0	▲ 19
Particles >71µm		ASTM D7647	>3	1	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 23/22/19	20/18/13	A 23/22/18
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.42	0.46	0.45



OIL ANALYSIS REPORT

method

*Visual

*Visual

*Visua

*Visual

*Visual

*Visual

*Visual

*Visual

method

ASTM D445

method

scalar *Visual

scalar *Visual

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

>0.05

46

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

curren

current

Particle Count

Acid Number

491 52 122,880

> 30,720 7,680

> > 480

120

30

(B) 0.50 HOX 0.40

Ē 0.30

ළි 0.20

2 0.10

0.00

]ec]

Mar19/24 .

Mar19/24

Mar19/24

:01 Apr 2024

: 02 Apr 2024

: 03 Apr 2024 - Don Baldridge

(per 1 1,920 NEG

NEG

43.8

history1

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

history

history1

NFG

NEG

43.6

history2

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

history2

history2

20 8

40

1995

NEG

NEG

44.0

VISUAL

White Metal

Yellow Metal

Precipitate

Silt

Debris

Odor

Color

Bottom

GRAPHS Ferrous Alloys

Dec1

Dec1

B 45

Abnormal

55

50

40

35 Dec1/22

10

licke

Non-ferrous Metals

Viscosity @ 40°C

Sand/Dirt

Appearance


Free Water


Visc @ 40°C


Emulsified Water

FLUID PROPERTIES

SAMPLE IMAGES

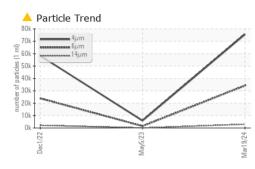



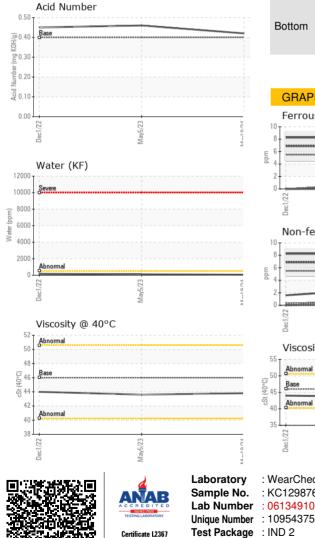

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: KC129876

:06134910

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

/lav5/23

Mav5/23

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Diagnosed

Tested

METPLAS INC

NATRONA HEIGHTS, PA

Contact: Service Manager

3 ACEE DR

US 15065

Aav5/73