




# OIL ANALYSIS REPORT

Sample Rating Trend

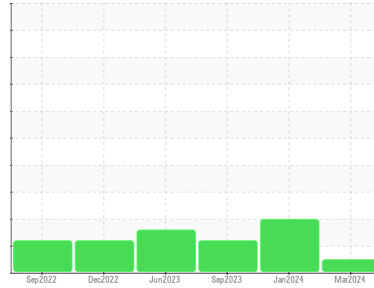

**NORMAL**



Machine Id  
**BUSCH M-VAC-PMP (S/N 5585111)**

Component  
**Vacuum Pump**

Fluid  
**USPI VAC 100 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>USPM36579</b>   | USPM30539   | USPM29748   |
| Sample Date   | Client Info |             | <b>29 Mar 2024</b> | 07 Jan 2024 | 23 Sep 2023 |
| Machine Age   | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | ABNORMAL    | ABNORMAL    |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >20 | <b>0</b>     | <1       | 1        |
| Chromium | ppm    | ASTM D5185m >20 | <b>&lt;1</b> | <1       | 0        |
| Nickel   | ppm    | ASTM D5185m >20 | <b>0</b>     | <1       | 0        |
| Titanium | ppm    | ASTM D5185m     | <b>0</b>     | <1       | <1       |
| Silver   | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >20 | <b>0</b>     | 2        | 3        |
| Lead     | ppm    | ASTM D5185m >20 | <b>0</b>     | <1       | 0        |
| Copper   | ppm    | ASTM D5185m >20 | <b>0</b>     | <1       | <1       |
| Tin      | ppm    | ASTM D5185m >20 | <b>&lt;1</b> | <1       | <1       |
| Vanadium | ppm    | ASTM D5185m     | <b>0</b>     | 0        | <1       |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | <1       | <1       |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 0    | <b>0</b>     | <1       | 0        |
| Manganese  | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 0    | <b>0</b>     | <1       | 1        |
| Calcium    | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Phosphorus | ppm    | ASTM D5185m 1800 | <b>628</b>   | 664      | 487      |
| Zinc       | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Sulfur     | ppm    | ASTM D5185m 0    | <b>181</b>   | 413      | 564      |

## CONTAMINANTS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >15  | <b>3</b>     | 3        | 3        |
| Sodium    | ppm    | ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Potassium | ppm    | ASTM D5185m >20  | <b>0</b>     | 1        | 2        |
| Water     | %      | ASTM D6304 >.1   | <b>0.095</b> | 0.046    | 0.023    |
| ppm Water | ppm    | ASTM D6304 >1000 | <b>958</b>   | 467      | 235.1    |

## FLUID CLEANLINESS






|                 | method       | limit/base | current         | history1   | history2 |
|-----------------|--------------|------------|-----------------|------------|----------|
| Particles >4µm  | ASTM D7647   | >5000      | <b>1950</b>     | ▲ 104644   | ---      |
| Particles >6µm  | ASTM D7647   | >1300      | <b>479</b>      | ▲ 26891    | ---      |
| Particles >14µm | ASTM D7647   | >160       | <b>16</b>       | ▲ 610      | ---      |
| Particles >21µm | ASTM D7647   | >40        | <b>3</b>        | ▲ 110      | ---      |
| Particles >38µm | ASTM D7647   | >10        | <b>0</b>        | 1          | ---      |
| Particles >71µm | ASTM D7647   | >3         | <b>0</b>        | 0          | ---      |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14  | <b>18/16/11</b> | ▲ 24/22/16 | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base      | current      | history1 | history2 |
|------------------|----------|-----------------|--------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.05 | <b>0.061</b> | 0.08     | 0.13     |




# OIL ANALYSIS REPORT

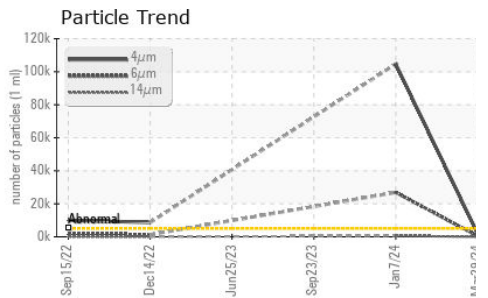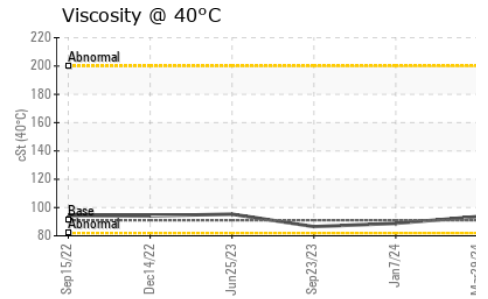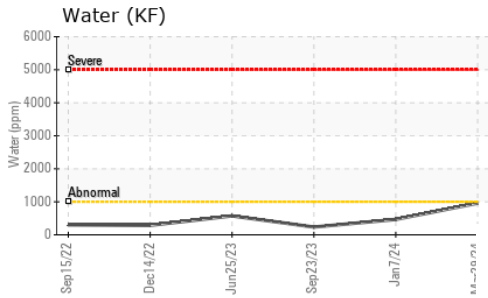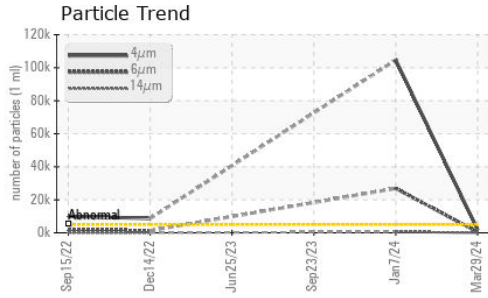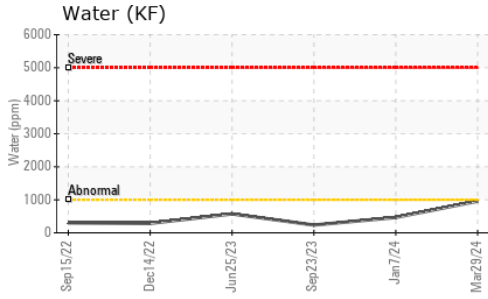






| VISUAL           | method | limit/base | current | history1     | history2     |
|------------------|--------|------------|---------|--------------|--------------|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE ▲ MODER |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE         |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE         |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE         |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | LIGHT        |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE         |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | NORML        |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | NORML        |
| Emulsified Water | scalar | *Visual    | >.1     | <b>NEG</b>   | NEG          |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | NEG          |

| FLUID PROPERTIES | method | limit/base   | current     | history1 | history2 |
|------------------|--------|--------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 91 | <b>93.6</b> | 88.8     | 86.5     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

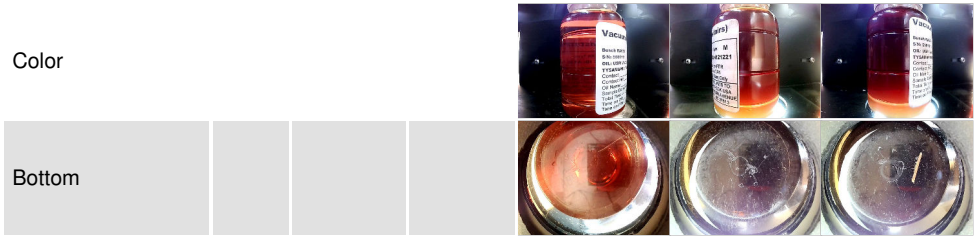

## GRAPHS

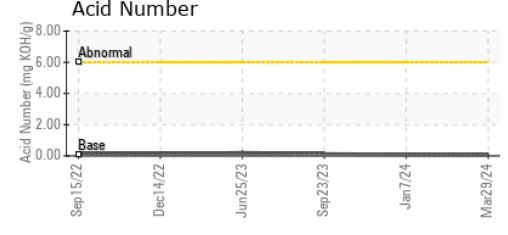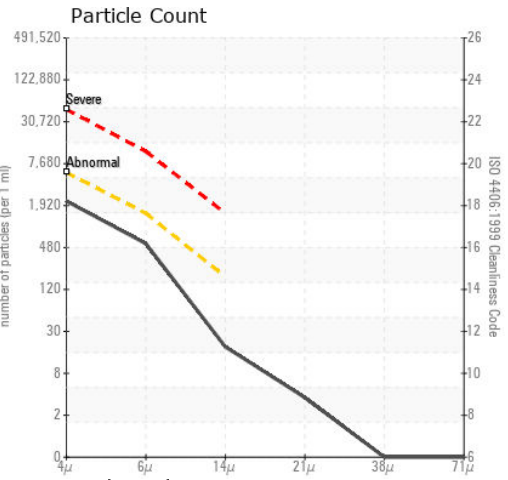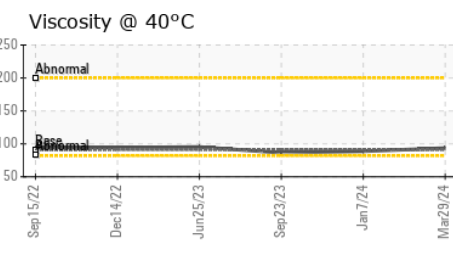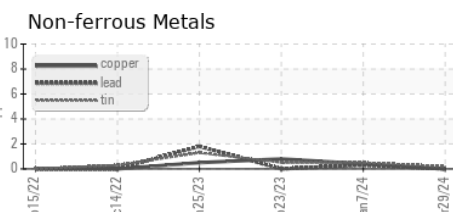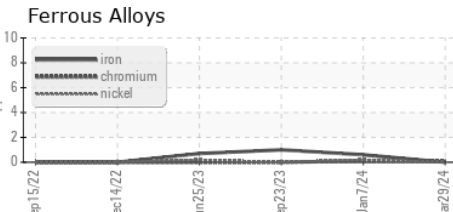

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USPM36579  
**Lab Number** : 06134975  
**Unique Number** : 10954440  
**Test Package** : IND 2  
**Received** : 01 Apr 2024  
**Tested** : 02 Apr 2024  
**Diagnosed** : 02 Apr 2024 - Doug Bogart

**TYSON - AMARILLO-PRO**  
 AMARILLO, TX  
 US  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)