

Area


SMART OIL 6000

Machine Id

HERTZ VD010847 - ADAMS COLLISION SERVICE

Component

Compressor

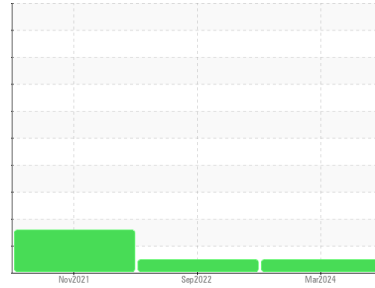

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			UHK06135074	UHK05643781	UCH05410744
Sample Date	Client Info			26 Mar 2024	13 Sep 2022	17 Nov 2021
Machine Age	hrs	Client Info		5323	1040	28
Oil Age	hrs	Client Info		1979	300	28
Oil Changed	Client Info			Changed	Not Chngd	N/A
Sample Status				NORMAL	NORMAL	ATTENTION




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	5
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		<1	2	4
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	0	0	1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	2	2
Tin	ppm	ASTM D5185m	>15	<1	3	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	3
Calcium	ppm	ASTM D5185m	20	<1	0	10
Phosphorus	ppm	ASTM D5185m		495	414	120
Zinc	ppm	ASTM D5185m		0	26	46
Sulfur	ppm	ASTM D5185m		1183	462	265

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	5	4
Sodium	ppm	ASTM D5185m		1	0	1
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.1	0.049	0.070	0.344
ppm Water	ppm	ASTM D6304	>1000	490	700	3440

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.14	0.07	0.103


OIL ANALYSIS REPORT

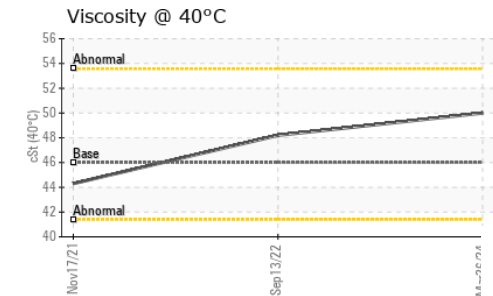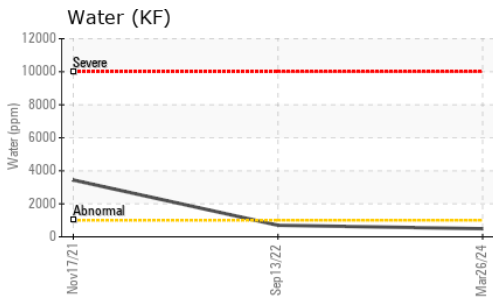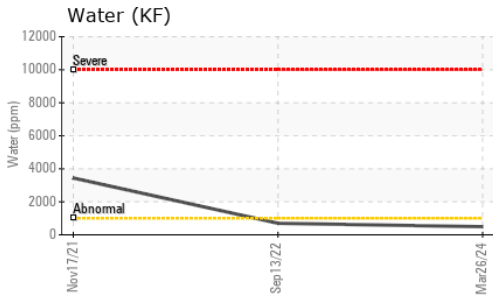






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	0.2%	0.2%	0.2%
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	50.0	48.2	44.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

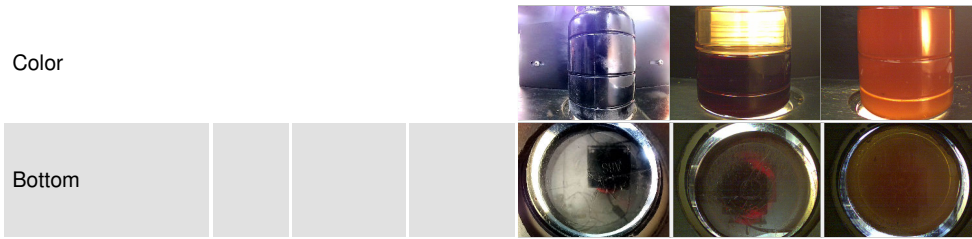

GRAPHS

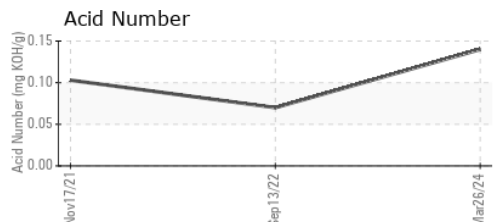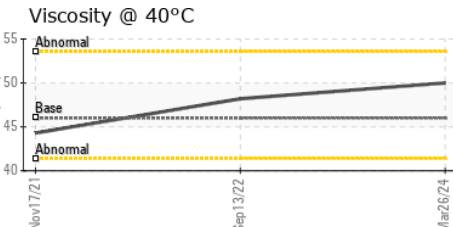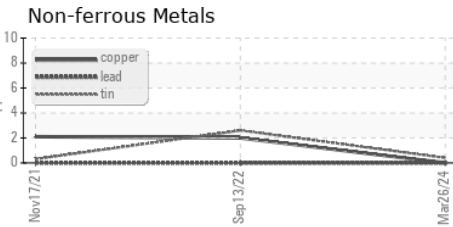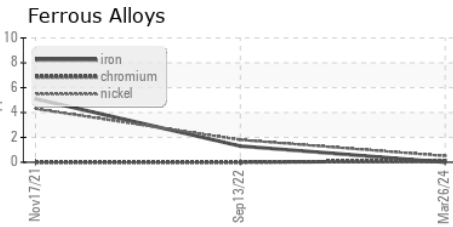

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UHK06135074 **Received** : 01 Apr 2024
Lab Number : **06135074** **Tested** : 03 Apr 2024
Unique Number : 10954539 **Diagnosed** : 03 Apr 2024 - Sean Felton
Test Package : IND 2 (Additional Tests: KF)

COMPRESSOR SERVICES
 5723 WEATHERSTONE WAY
 JOHNSBURG, IL
 US 60051
 Contact: MIKE BRITT
 mike@compressorservices.net
 T: 1(706)455-9081
 F: (847)497-9754

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)