



OIL ANALYSIS REPORT

Sample Rating Trend



GLYCOL



Machine Id
KENWORTH 605

Component
Front Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0007032	---	---
Sample Date	Client Info		25 Mar 2024	---	---
Machine Age	mls	Client Info	975962	---	---
Oil Age	mls	Client Info	16000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	5	---
Chromium	ppm	ASTM D5185m	>20	<1	---
Nickel	ppm	ASTM D5185m	>4	1	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	<1	---
Aluminum	ppm	ASTM D5185m	>20	2	---
Lead	ppm	ASTM D5185m	>40	2	---
Copper	ppm	ASTM D5185m	>330	0	---
Tin	ppm	ASTM D5185m	>15	<1	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	6	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	60	64	---
Manganese	ppm	ASTM D5185m	0	<1	---
Magnesium	ppm	ASTM D5185m	1010	809	---
Calcium	ppm	ASTM D5185m	1070	889	---
Phosphorus	ppm	ASTM D5185m	1150	916	---
Zinc	ppm	ASTM D5185m	1270	1071	---
Sulfur	ppm	ASTM D5185m	2060	3130	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	---
Sodium	ppm	ASTM D5185m		▲ 79	---
Potassium	ppm	ASTM D5185m	>20	▲ 118	---
Glycol	%	*ASTM D2982		NEG	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.1	---
Sulfation	Abs./1mm	*ASTM D7415	>30	17.4	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414	>25	12.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.27	---







OIL ANALYSIS REPORT

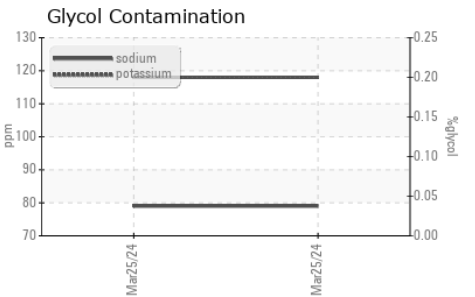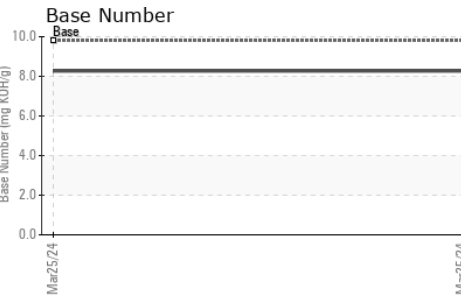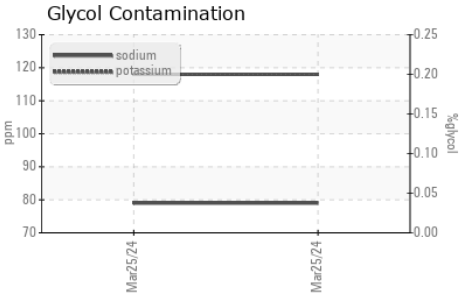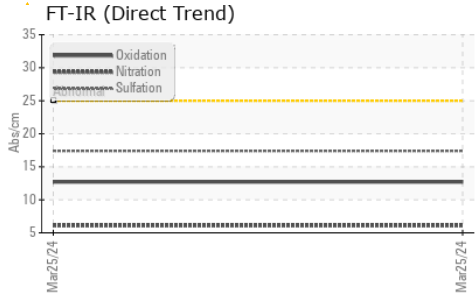

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 17.1	---

GRAPHS

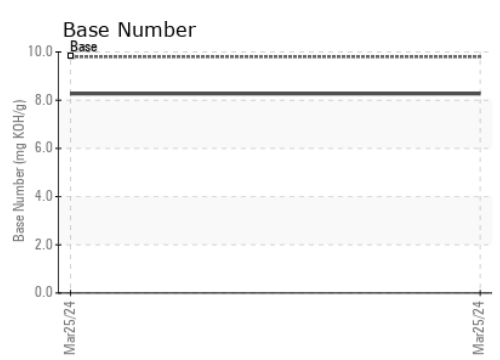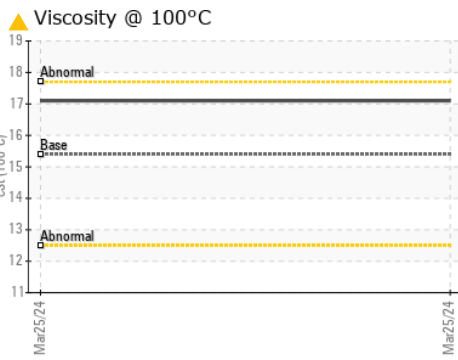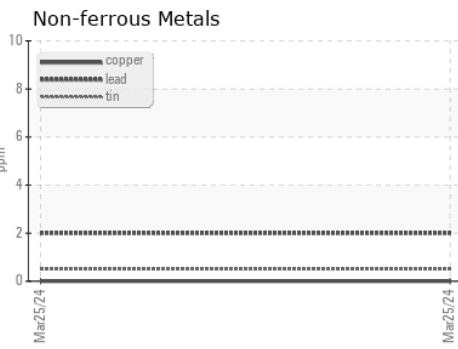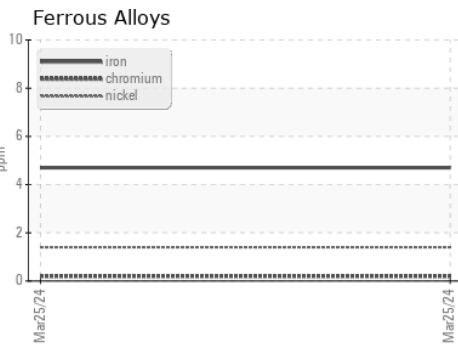

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007032 **Received** : 01 Apr 2024
Lab Number : **06135137** **Tested** : 04 Apr 2024
Unique Number : 10954602 **Diagnosed** : 04 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

BERGMAN TRUCKING
 889 COUNTY RD 12
 ITHACA, NE
 US 68033
 Contact: RANDY BERGMAN
 bergmantrucking@yahoo.com
 T: (402)443-8919
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)