



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Area
[22327]
Machine Id
40-164

Component
Left Final Drive
Fluid

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

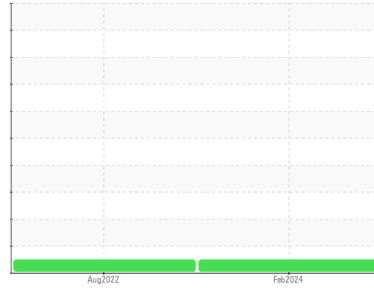

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0836174	WC0709421	---
Sample Date	Client Info		29 Feb 2024	04 Aug 2022	---
Machine Age	hrs	Client Info	3202	2699	---
Oil Age	hrs	Client Info	1202	699	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	178	55	---
Chromium	ppm	ASTM D5185m >10	6	2	---
Nickel	ppm	ASTM D5185m >10	1	1	---
Titanium	ppm	ASTM D5185m	2	<1	---
Silver	ppm	ASTM D5185m	<1	0	---
Aluminum	ppm	ASTM D5185m >25	6	2	---
Lead	ppm	ASTM D5185m >25	1	0	---
Copper	ppm	ASTM D5185m >50	14	6	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Vanadium	ppm	ASTM D5185m	1	<1	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	190	123	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	69	52	---
Manganese	ppm	ASTM D5185m	3	<1	---
Magnesium	ppm	ASTM D5185m 350	456	323	---
Calcium	ppm	ASTM D5185m 1800	2692	1944	---
Phosphorus	ppm	ASTM D5185m 1000	1453	1038	---
Zinc	ppm	ASTM D5185m 1100	1663	1223	---
Sulfur	ppm	ASTM D5185m 3500	5827	3876	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	38	15	---
Sodium	ppm	ASTM D5185m	3	2	---
Potassium	ppm	ASTM D5185m >20	4	2	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	NONE	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---



OIL ANALYSIS REPORT

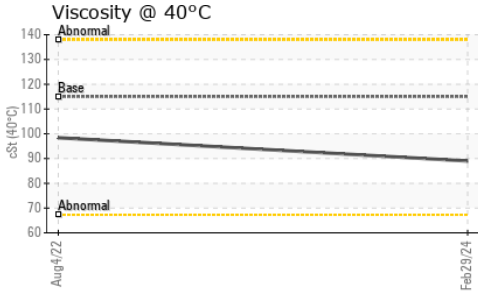




FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	115	89.0	98.4	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

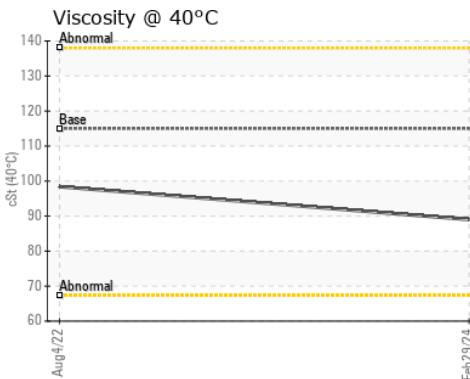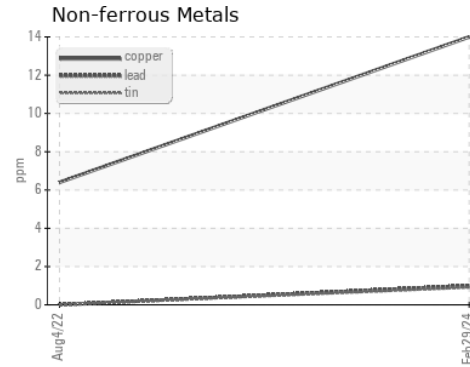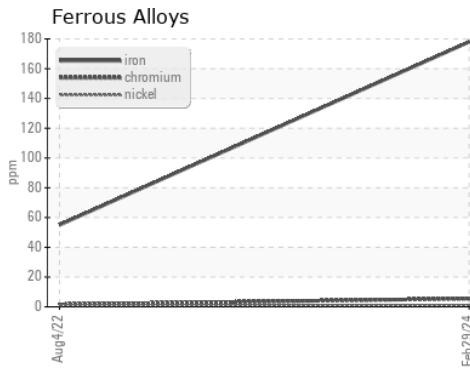

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836174 **Received** : 01 Apr 2024
Lab Number : **06135311** **Tested** : 02 Apr 2024
Unique Number : 10954776 **Diagnosed** : 02 Apr 2024 - Wes Davis
Test Package : CONST

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)