




OIL ANALYSIS REPORT

Sample Rating Trend

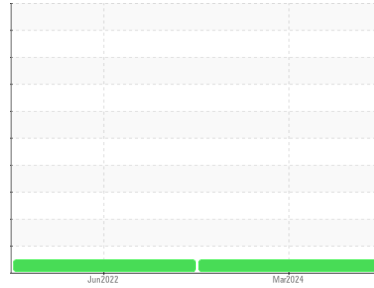

NORMAL



Area

[22111]

Machine Id

50114

Component

Transmission (Manual)

Fluid

CONOCO PHILLIPS 10W POWER DRIVE (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: ConocoPhillips 10w power drive)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0836094	WC0601662	---
Sample Date	Client Info			12 Mar 2024	17 Jun 2022	---
Machine Age	hrs	Client Info		4173	3619	---
Oil Age	hrs	Client Info		1173	619	---
Oil Changed	Client Info			Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	38	14	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m	>7	<1	0	---
Aluminum	ppm	ASTM D5185m	>25	4	1	---
Lead	ppm	ASTM D5185m	>45	2	1	---
Copper	ppm	ASTM D5185m	>225	10	8	---
Tin	ppm	ASTM D5185m	>10	2	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		66	65	---
Barium	ppm	ASTM D5185m		<1	<1	---
Molybdenum	ppm	ASTM D5185m		15	8	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m		59	40	---
Calcium	ppm	ASTM D5185m		3228	3153	---
Phosphorus	ppm	ASTM D5185m		958	849	---
Zinc	ppm	ASTM D5185m		1081	993	---
Sulfur	ppm	ASTM D5185m		4105	4219	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	36	26	---
Sodium	ppm	ASTM D5185m		3	2	---
Potassium	ppm	ASTM D5185m	>20	4	<1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---






OIL ANALYSIS REPORT

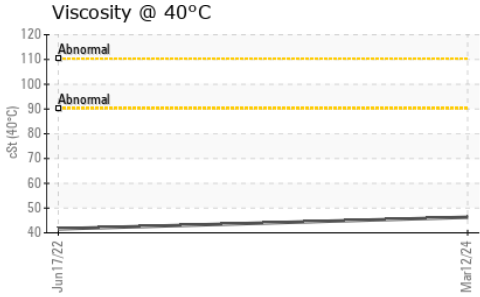

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.3	41.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

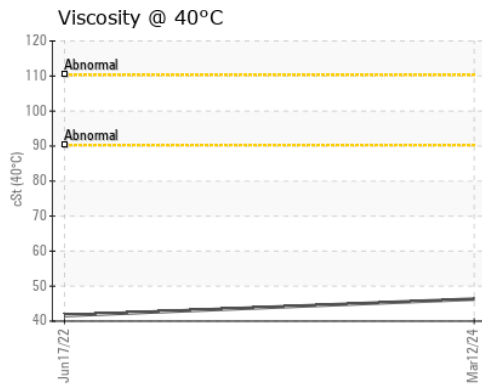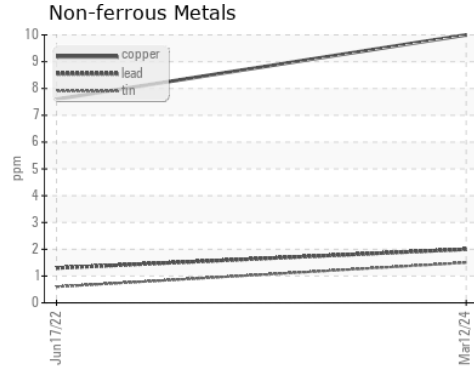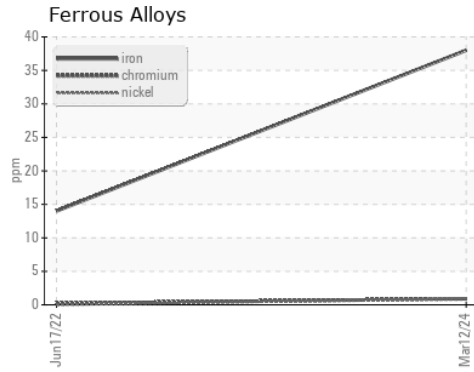

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836094 **Received** : 01 Apr 2024
Lab Number : 06135337 **Tested** : 04 Apr 2024
Unique Number : 10954802 **Diagnosed** : 04 Apr 2024 - Jonathan Hester
Test Package : CONST

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: JAMES STEELMON
 james.steelmon@manhattanrb.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: