


FUEL REPORT

Sample Rating Trend

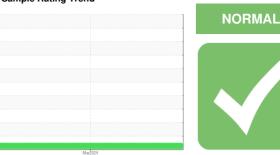

Machine Id

154271 - IPE

Component

Diesel Fuel

No.2 DIESEL FUEL (ULTRALOW SULPHUF

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION method limit/base current history1 history2 Sample Date Client Info WC06135397	o) (OTC)						Y
Sample Number Client Info WC06135397	R) (QTS)				Mar2024		
Sample Date Client Info 29 Mar 2024 Machine Age hrs Client Info 0	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine Age Ars	Sample Number		Client Info		WC06135397		
PHYSICAL PROPERTIES method limit/base current history1 history2	Sample Date		Client Info		29 Mar 2024		
PHYSICAL PROPERTIES	Machine Age	hrs	Client Info		0		
Fuel Color	Sample Status				NORMAL		
ASTM Color	PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Visc @ 40°C cSt ASTM D445 3.0 2.59 Pensky-Martens Flash Point °C °PM00 Calculated 52 61.2 SULFUR CONTENT method limit/base current history1 history2 Sulfur (UVF) ppm ASTM D5453 10 0 DISTILLATION method limit/base current history1 history2 DISTILLATION ASTM D86 201 203	Fuel Color	text	*Visual Screen	Yllow	Red		
Pensky-Martens Flash Point °C °PMCC Calculated 52 61.2	ASTM Color	scalar	*ASTM D1500		L4.5		
SULFUR CONTENT method limit/base current history1 history2 Sulfur ppm ASTM D5185m 10 0 Sulfur (UVF) ppm ASTM D5453 10 DISTILLATION method limit/base current history1 history2 Initial Boiling Point °C ASTM D86 193 10% Distill Point °C ASTM D86 210 10% Distill Point °C ASTM D86 210 20% Distill Point °C ASTM D86 216 218 20% Distill Point °C ASTM D86 230 233 30% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 70% Distill Point °C ASTM D86 295	Visc @ 40°C	cSt	ASTM D445	3.0	2.59		
Sulfur DPM	Pensky-Martens Flash Point	°C	*PMCC Calculated	52	61.2		
Sulfur (UVF) ppm ASTM D5453 10	SULFUR CONTE	VT	method	limit/base	current	history1	history2
DISTILLATION	Sulfur	ppm	ASTM D5185m	10	0		
Initial Boiling Point	Sulfur (UVF)	ppm	ASTM D5453		10		
5% Distillation Point °C ASTM D86 193 10% Distill Point °C ASTM D86 201 203 15% Distillation Point °C ASTM D86 210 20% Distill Point °C ASTM D86 218 30% Distill Point °C ASTM D86 230 233 40% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 314 96% Distill Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 <td>DISTILLATION</td> <td></td> <td>method</td> <td>limit/base</td> <td>current</td> <td>history1</td> <td>history2</td>	DISTILLATION		method	limit/base	current	history1	history2
10% Distill Point °C ASTM D86 201 203 15% Distillation Point °C ASTM D86 210 20% Distill Point °C ASTM D86 216 218 30% Distill Point °C ASTM D86 230 233 40% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 310 325 90% Distill Point °C ASTM D86 341 356 95% Distillation Point °C ASTM D86 341 356 Final	Initial Boiling Point	°C	ASTM D86	165	172		
15% Distillation Point °C ASTM D86 210 20% Distill Point °C ASTM D86 216 218 30% Distill Point °C ASTM D86 230 233 40% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 267 274 70% Distill Point °C ASTM D86 280 288 80% Distillation Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 310 325 90% Distill Point °C ASTM D86 341 356 Final Boiling Point °C ASTM D86 341 356 IGN	5% Distillation Point	°C	ASTM D86		193		
20% Distill Point °C ASTM D86 216 218 30% Distill Point °C ASTM D86 230 233 40% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 267 274 70% Distill Point °C ASTM D86 288 80% Distill Point °C ASTM D86 314 85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current </td <td>10% Distill Point</td> <td>°C</td> <td>ASTM D86</td> <td>201</td> <td>203</td> <td></td> <td></td>	10% Distill Point	°C	ASTM D86	201	203		
30% Distill Point °C ASTM D86 230 233 40% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 267 274 70% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 342 95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 Cetane Index ASTM D4737	15% Distillation Point	°C	ASTM D86		210		
40% Distill Point °C ASTM D86 243 246 50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 267 274 70% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 342 95% Distillation Point °C ASTM D86 342 95% Distillation Point °C ASTM D86 341 356 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D4737	20% Distill Point	°C	ASTM D86	216	218		
50% Distill Point °C ASTM D86 255 260 60% Distill Point °C ASTM D86 267 274 70% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 310 325 90% Distill Point °C ASTM D86 342 95% Distillation Point °C ASTM D86 341 356 Final Boiling Point °C ASTM D86 341 356 Final Boiling Point °C ASTM D87 37.7 36 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D4737 <40.0	30% Distill Point	°C	ASTM D86	230	233		
60% Distill Point °C ASTM D86 267 274 70% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 342 95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D4737 <40.0	40% Distill Point	°C	ASTM D86	243	246		
70% Distill Point °C ASTM D86 280 288 80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 342 95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D4737 36 Cetane Index ASTM D5185m <1.0	50% Distill Point	°C	ASTM D86	255	260		
80% Distill Point °C ASTM D86 295 304 85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 310 325 95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 47 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m <1.0	60% Distill Point	°C	ASTM D86	267	274		
85% Distillation Point °C ASTM D86 314 90% Distill Point °C ASTM D86 310 325 95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 <40.0	70% Distill Point	°C	ASTM D86	280	288		
90% Distill Point °C ASTM D86 310 325 95% Distillation Point °C ASTM D86 341 356 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 <40.0	80% Distill Point	°C	ASTM D86	295	304		
90% Distill Point °C ASTM D86 310 325 95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 <40.0	85% Distillation Point	°C	ASTM D86		314		
95% Distillation Point °C ASTM D86 342 Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 <40.0		°C		310	325		
Final Boiling Point °C ASTM D86 341 356 IGNITION QUALITY method limit/base current history1 history2 API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 <40.0							
API Gravity ASTM D7777 37.7 36 Cetane Index ASTM D4737 <40.0 47 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m <1.0			ASTM D86	341	-		
Cetane Index ASTM D4737 <40.0 47 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m <1.0	IGNITION QUALIT	ΓΥ	method	limit/base	current	history1	history2
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m <1.0	API Gravity		ASTM D7777	37.7	36		
Silicon ppm ASTM D5185m <1.0 <1 Sodium ppm ASTM D5185m <0.1 1 Potassium ppm ASTM D5185m <0.1 0 Water % ASTM D6304 <0.05 0.007 ppm Water ppm ASTM D6304 <500 76 % Gasoline % *In-House <0.50 0.0	Cetane Index		ASTM D4737	<40.0	47		
Sodium ppm ASTM D5185m < 0.1 1 Potassium ppm ASTM D5185m < 0.1	CONTAMINANTS		method	limit/base	current	history1	history2
Sodium ppm ASTM D5185m <0.1 1 Potassium ppm ASTM D5185m <0.1	Silicon	ppm	ASTM D5185m	<1.0	<1		
Potassium ppm ASTM D5185m < 0.1 0 Water % ASTM D6304 < 0.05 0.007 ppm Water ppm ASTM D6304 < 500 76 % Gasoline % *In-House < 0.50 0.0	Sodium		ASTM D5185m	<0.1	1		
Water % ASTM D6304 <0.05 0.007 ppm Water ppm ASTM D6304 <500							
ppm Water ppm ASTM D6304 <500 76 % Gasoline % *In-House <0.50 0.0		• •					
% Gasoline							
		• •					
					2.0		



FUEL REPORT

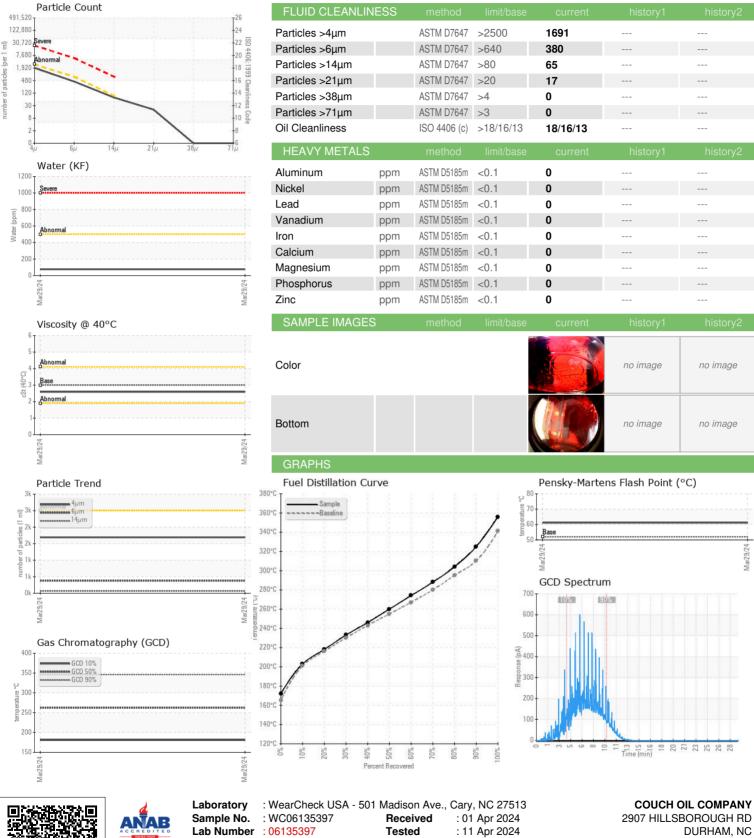





Certificate 12367

Lab Number : 06135397 Unique Number : 10954862

Diagnosed

: 11 Apr 2024 - Doug Bogart Test Package : DF-2 (Additional Tests: Fuel, Screen) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DURHAM, NC

US 27705

Contact: JESSE BROWN jesse@couchoilcompany.com

T: (919)285-5408