




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
CONSTRUCTORS, INC
 Machine Id
131708
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)

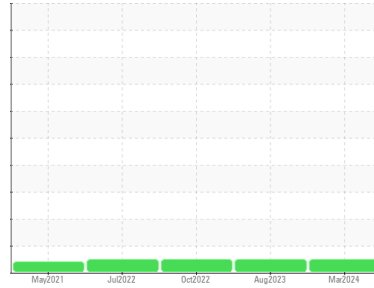

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0006362	SBP0004746	SBP0002100
Sample Date	Client Info		28 Mar 2024	11 Aug 2023	24 Oct 2022
Machine Age	hrs	Client Info	3280	2831	2291
Oil Age	hrs	Client Info	377	540	574
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	35	39	35
Chromium	ppm	ASTM D5185m >20	<1	<1	1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	8	9	7
Lead	ppm	ASTM D5185m >40	0	0	0
Copper	ppm	ASTM D5185m >330	1	3	3
Tin	ppm	ASTM D5185m >15	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	4
Barium	ppm	ASTM D5185m	0	0	<1
Molybdenum	ppm	ASTM D5185m	61	61	51
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	1039	1034	802
Calcium	ppm	ASTM D5185m	1225	1266	1221
Phosphorus	ppm	ASTM D5185m	1080	1081	915
Zinc	ppm	ASTM D5185m	1294	1386	1133
Sulfur	ppm	ASTM D5185m	3558	3834	2917

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	5	5
Sodium	ppm	ASTM D5185m	3	3	<1
Potassium	ppm	ASTM D5185m >20	1	2	3

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.7	0.9
Nitration	Abs/cm	*ASTM D7624 >20	8.6	8.5	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.6	19.0	21.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.5	15.1	18.2
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	8.5	8.1	8.6




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

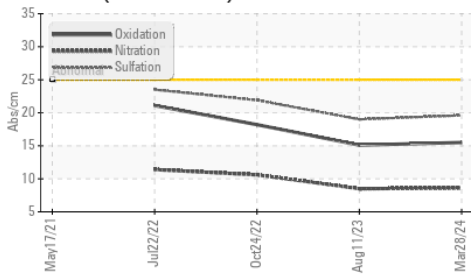

Base Number

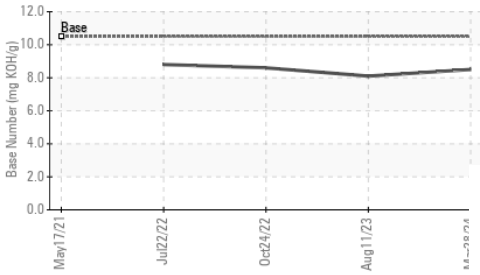

Viscosity @ 100°C

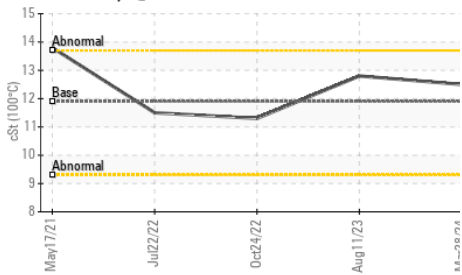


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	12.5	12.8

GRAPHS


Ferrous Alloys

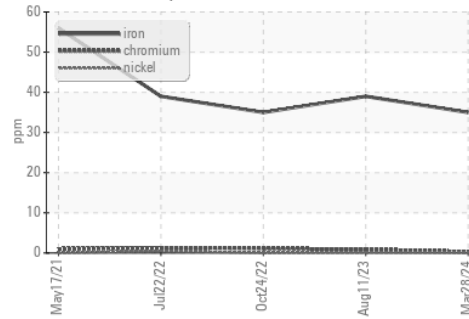


Non-ferrous Metals

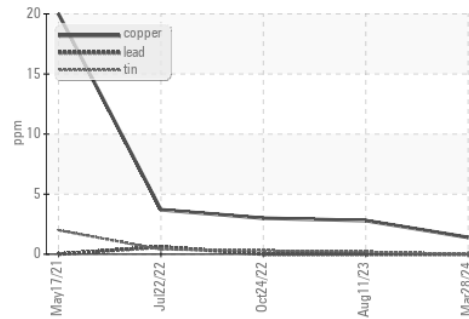

Viscosity @ 100°C

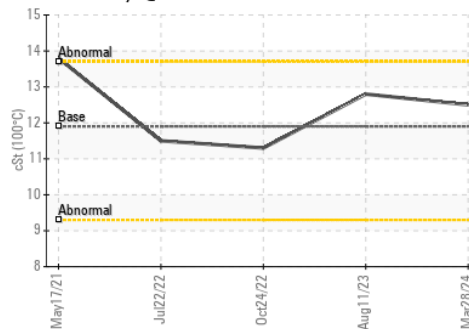

Base Number

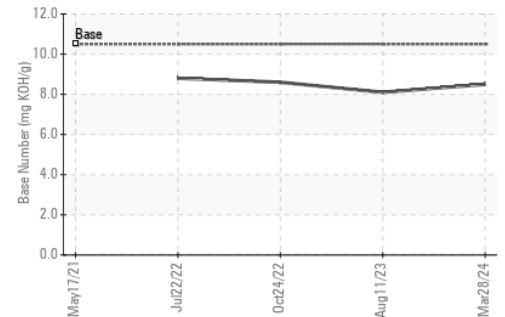

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0006362
Lab Number : 06135560
Unique Number : 10955025
Test Package : FLEET
Received : 01 Apr 2024
Tested : 02 Apr 2024
Diagnosed : 04 Apr 2024 - Sean Felton

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508

Contact: Loren Michael
 LorenM@constructorslincoln.com

T: (402)434-2157

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)