




OIL ANALYSIS REPORT

Sample Rating Trend

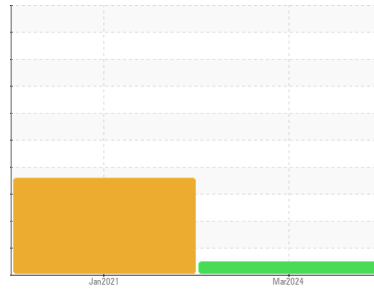

NORMAL



Machine Id
3807034 (S/N 1637)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA016359	KCP28998	---
Sample Date	Client Info			25 Mar 2024	26 Jan 2021	---
Machine Age	hrs	Client Info		39851	28661	---
Oil Age	hrs	Client Info		2840	0	---
Oil Changed	Client Info			Not Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	<1	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>3	<1	0	---
Titanium	ppm	ASTM D5185m	>3	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	2	<1	---
Lead	ppm	ASTM D5185m	>10	<1	0	---
Copper	ppm	ASTM D5185m	>50	3	4	---
Tin	ppm	ASTM D5185m	>10	1	0	---
Antimony	ppm	ASTM D5185m		---	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	1	---
Barium	ppm	ASTM D5185m	90	2	0	---
Molybdenum	ppm	ASTM D5185m	0	1	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	100	55	<1	---
Calcium	ppm	ASTM D5185m	0	4	0	---
Phosphorus	ppm	ASTM D5185m	0	10	456	---
Zinc	ppm	ASTM D5185m	0	29	3	---
Sulfur	ppm	ASTM D5185m	23500	22448	1871	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	3	---
Sodium	ppm	ASTM D5185m		25	<1	---
Potassium	ppm	ASTM D5185m	>20	5	0	---
Water	%	ASTM D6304	>0.05	0.026	▲ 0.126	---
ppm Water	ppm	ASTM D6304	>500	262	▲ 1260	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2353	---	---
Particles >6µm		ASTM D7647	>1300	449	---	---
Particles >14µm		ASTM D7647	>80	42	---	---
Particles >21µm		ASTM D7647	>20	16	---	---
Particles >38µm		ASTM D7647	>4	2	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	18/16/13	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34	0.151	---


OIL ANALYSIS REPORT

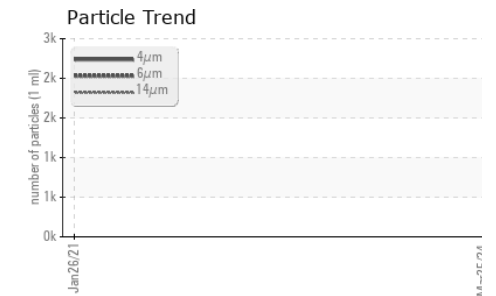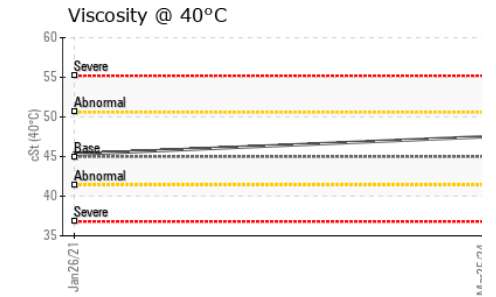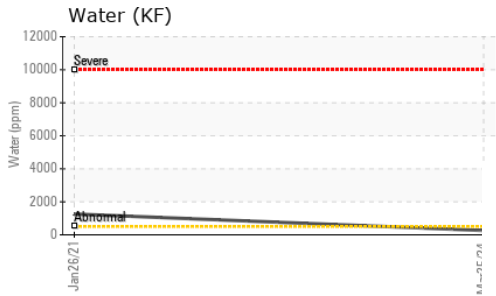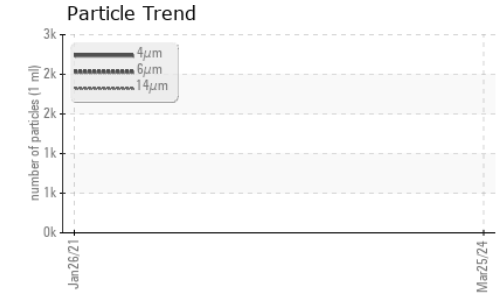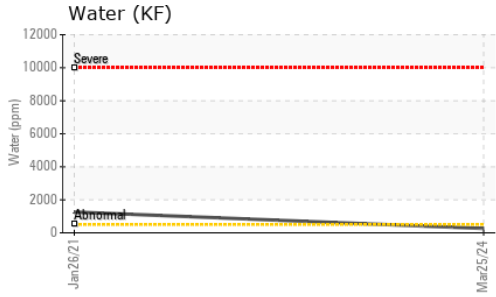






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	▲ 1.0

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.5	45.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

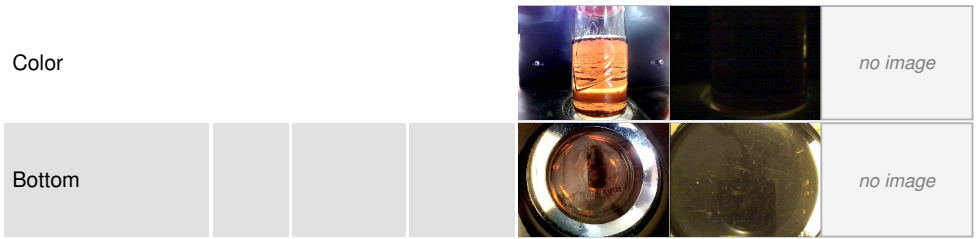

GRAPHS

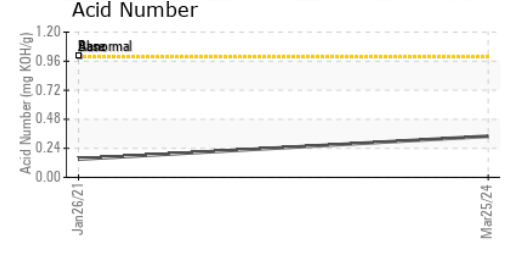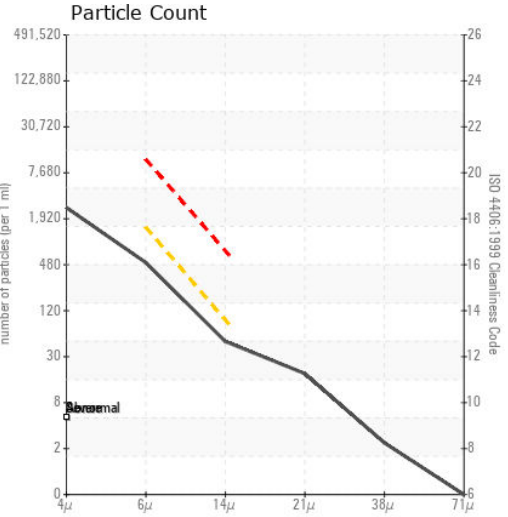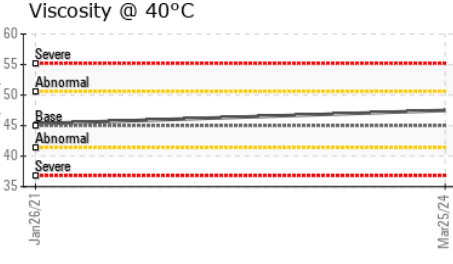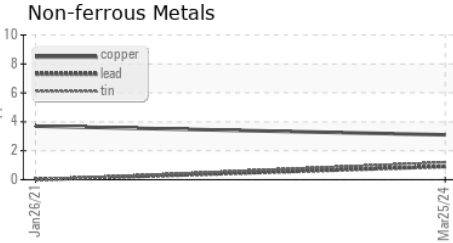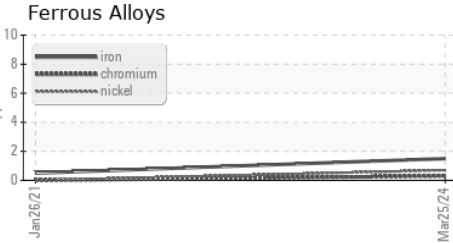

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA016359 **Received** : 01 Apr 2024
Lab Number : 06135640 **Tested** : 03 Apr 2024
Unique Number : 10955105 **Diagnosed** : 04 Apr 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

ZATEC LLC
 620 SPRING ST
 NORTH DIGHTON, MA
 US 02764
 Contact: M. PIERCE
 mpierce@zatecinc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)