

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7967742

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013950	KCA005514	
Sample Date		Client Info		26 Mar 2024	08 Aug 2023	
Machine Age	hrs	Client Info		7661	6086	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Not Changd	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>50	<1	0	
-	ppm					
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	<1	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	<1	
Lead	ppm	ASTM D5185m	>10	1	0	
Copper	ppm	ASTM D5185m	>50	1	<1	
Tin	ppm	ASTM D5185m	>10	1	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	70	23	
Molybdenum	ppm	ASTM D5185m	0	<1	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	87	76	
Calcium	ppm	ASTM D5185m	0	6	0	
Phosphorus	ppm	ASTM D5185m	0	0	<1	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	23500	23428	23744	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		17	17	
Potassium	ppm	ASTM D5185m	>20	4	3	
Water	%	ASTM D6304	>0.05	0.016	0.033	
ppm Water	ppm	ASTM D6304	>500	162	339.9	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		855	424	
Particles >6µm		ASTM D7647	>1300	257	121	
Particles >14µm		ASTM D7647	>80	34	12	
Particles >21µm		ASTM D7647	>20	12	3	
Particles >38µm		ASTM D7647	>4	1	0	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/12	16/14/11	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36	0.40	
	ing roung			0.00	0.10	


Contact/Location: Service Manager - AMAFAR Page 1 of 2




0

B

OIL ANALYSIS REPORT

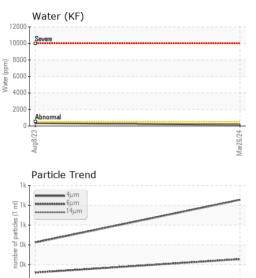

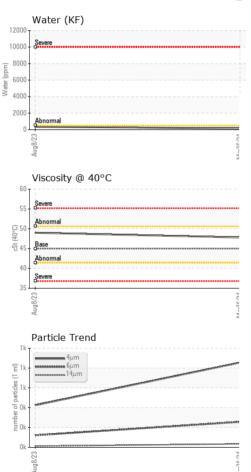

VISUAL White Metal		method				
White Metal						
	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance Odor	scalar	*Visual *Visual	NORML	NORML NORML	NORML	
Emulsified Water	scalar scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual	>0.05	NEG	NEG	
			11 1. 1			
FLUID PROPERT Visc @ 40°C	cSt	method ASTM D445	limit/base 45	current 47.8	history1 49.0	histo
						hiote
SAMPLE IMAGES	5	method	limit/base	current	history1	histo
Color						no ima
Bottom						no ima
GRAPHS						
Ferrous Alloys				Particle Count	-	
10 iron			491,520	I		
6			122,880			
			30,720			
2						
			7,680			
0			2	· · · · · · · · · · · · · · · · · · ·		
			026'1 July 1'050			
Aug8/23			Mar26/24 ides (per 1 ml		N	
	s		Mar26 Mar20 Mar20 Mar20			
Non-ferrous Metal	s		Mar26 Mar26 Mar26 Mar26 Mar26			
Non-ferrous Metal	S		saporte 480			
Non-ferrous Metal	s		97. EW W 97. EV W 97. EV W 97			
Non-ferrous Metal	S			Bereenal		
Non-ferrous Metal	S		30 8	Boreemal		
Non-ferrous Metal	S		30 8 + + 2 2 2	Rereemal		
Non-ferrous Metal	S		30 8	и 6 и	14μ 21μ	38μ
Non-ferrous Metal	S		30. ++++++++++++++++++++++++++++++++++++	Acid Number	14μ 21μ	36μ
Non-ferrous Metal	S		30. ++++++++++++++++++++++++++++++++++++	и 6 и	14μ 21μ	38µ
Non-ferrous Metal	5		30. ++++++++++++++++++++++++++++++++++++	Acid Number	14μ 21μ	38µ
Non-ferrous Metal	S		30. ++++++++++++++++++++++++++++++++++++	Acid Number	14μ 21μ	38µ
Non-ferrous Metal	S		30. ++++++++++++++++++++++++++++++++++++	Acid Number	14μ 21μ	38µ
Non-ferrous Metal	S		30 8 + + 2 2 2	Acid Number	14μ 21μ	38µ

- To discuss this sample report, contact Customer Service at 1-800-237-1369.
- * Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - AMAFAR

T:

F: