




OIL ANALYSIS REPORT

Sample Rating Trend

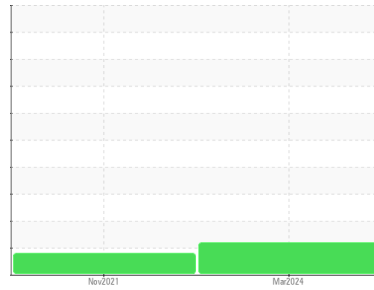

ISO



Machine Id

KAESER 7164940

Component

Compressor

Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA016956	KCP94730	---
Sample Date	Client Info			28 Mar 2024	11 Nov 2021	---
Machine Age	hrs	Client Info		18930	9187	---
Oil Age	hrs	Client Info		1187	2913	---
Oil Changed	Client Info			Not Changed	Changed	---
Sample Status				ATTENTION	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>3	<1	0	---
Titanium	ppm	ASTM D5185m	>3	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	2	0	---
Lead	ppm	ASTM D5185m	>10	1	0	---
Copper	ppm	ASTM D5185m	>50	3	3	---
Tin	ppm	ASTM D5185m	>10	1	0	---
Antimony	ppm	ASTM D5185m		---	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	15	---
Barium	ppm	ASTM D5185m	90	24	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	90	77	35	---
Calcium	ppm	ASTM D5185m	2	5	0	---
Phosphorus	ppm	ASTM D5185m		0	4	---
Zinc	ppm	ASTM D5185m		8	1	---
Sulfur	ppm	ASTM D5185m		24845	16149	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	---
Sodium	ppm	ASTM D5185m		20	12	---
Potassium	ppm	ASTM D5185m	>20	4	1	---
Water	%	ASTM D6304	>0.05	0.013	0.016	---
ppm Water	ppm	ASTM D6304	>500	136	161.2	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		745	2339	---
Particles >6µm		ASTM D7647	>1300	237	1002	---
Particles >14µm		ASTM D7647	>20	28	65	---
Particles >21µm		ASTM D7647	>4	5	12	---
Particles >38µm		ASTM D7647	>3	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>17/11	15/12	17/13	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.32	0.288	---


OIL ANALYSIS REPORT

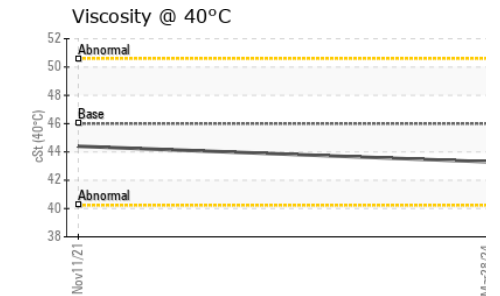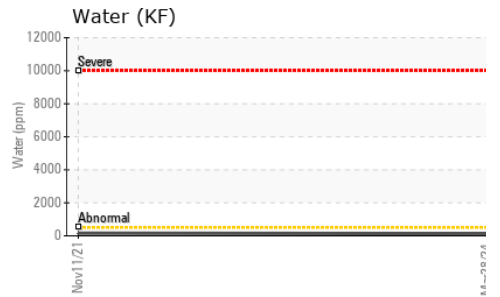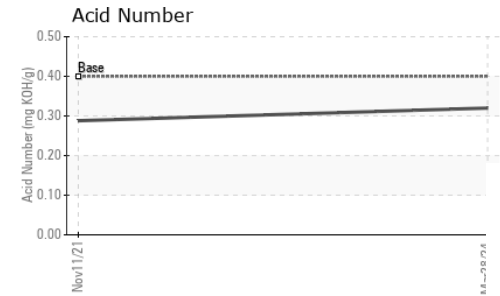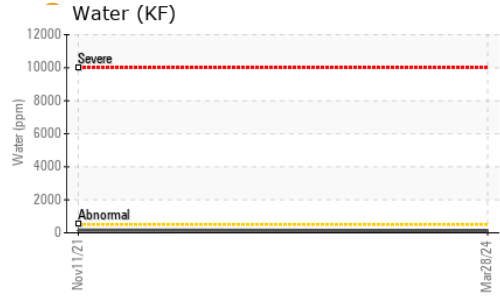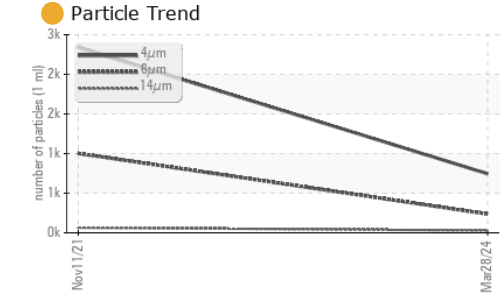





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	43.3	44.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

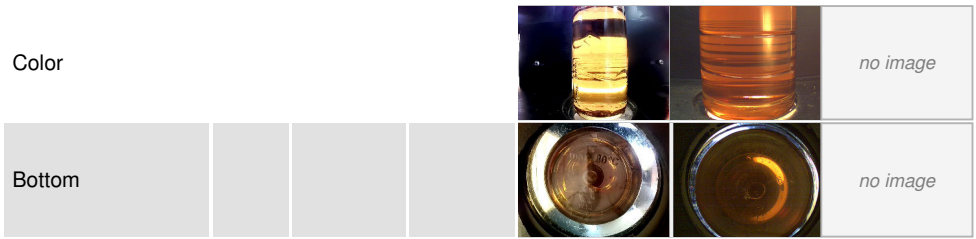

GRAPHS

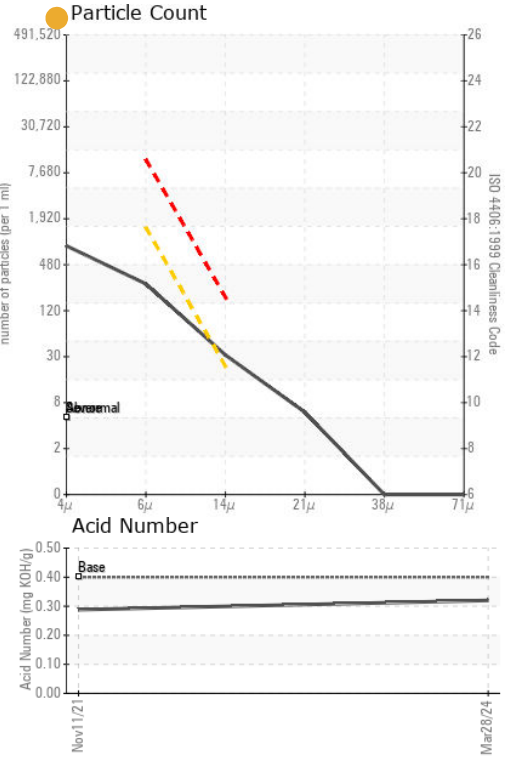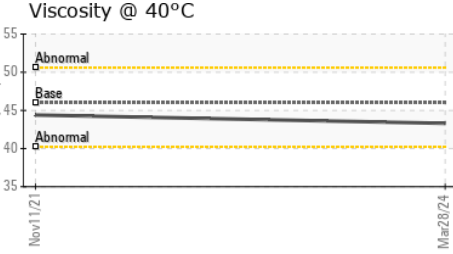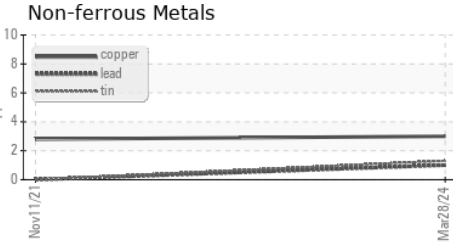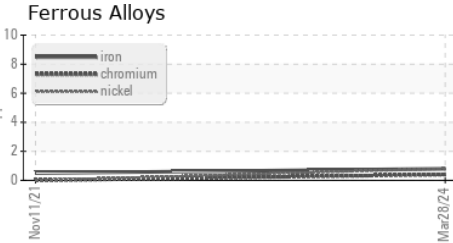

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA016956 **Received** : 01 Apr 2024
Lab Number : 06135665 **Tested** : 03 Apr 2024
Unique Number : 10955130 **Diagnosed** : 04 Apr 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

OXMOOR HYUNDAI
 8107 SHELBYVILLE RD
 LOUISVILLE, KY
 US 40222
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: