




# OIL ANALYSIS REPORT

## Sample Rating Trend

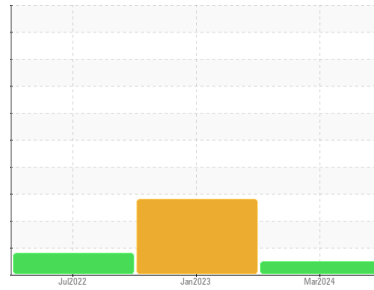

**NORMAL**



Machine Id  
**7888963 (S/N 1645)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC121611</b>	KC97115	KC92861
Sample Date	Client Info			<b>15 Mar 2024</b>	04 Jan 2023	11 Jul 2022
Machine Age	hrs	Client Info		<b>2591</b>	626	238
Oil Age	hrs	Client Info		<b>0</b>	406	238
Oil Changed	Client Info			<b>N/A</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m	>50	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>18</b>	15	<1
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	90	<b>71</b>	36	43
Calcium	ppm	ASTM D5185m	2	<b>5</b>	<1	0
Phosphorus	ppm	ASTM D5185m		<b>4</b>	9	14
Zinc	ppm	ASTM D5185m		<b>3</b>	2	2

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	2	<1
Sodium	ppm	ASTM D5185m		<b>12</b>	3	7
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	8	16
Water	%	ASTM D6304	>0.05	<b>0.029</b>	▲ 0.157	0.024
ppm Water	ppm	ASTM D6304	>500	<b>297</b>	▲ 1570	245.4

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>3373</b>	---	4579
Particles >6µm		ASTM D7647	>1300	<b>873</b>	---	● 1321
Particles >14µm		ASTM D7647	>80	<b>47</b>	---	57
Particles >21µm		ASTM D7647	>20	<b>9</b>	---	8
Particles >38µm		ASTM D7647	>4	<b>0</b>	---	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>19/17/13</b>	---	● 19/18/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.44</b>	0.28	0.34


# OIL ANALYSIS REPORT

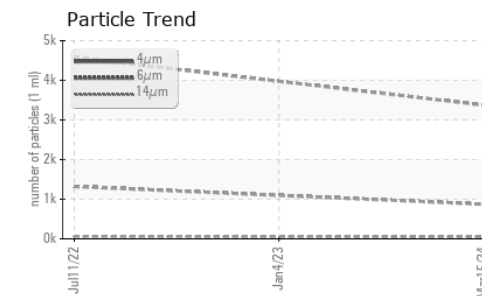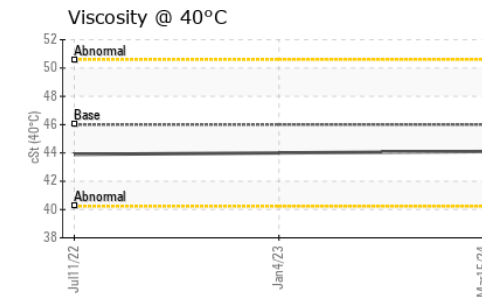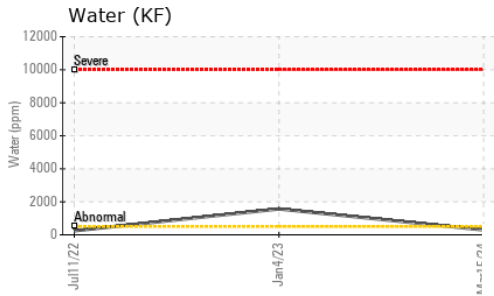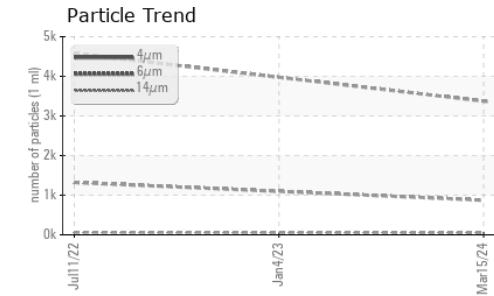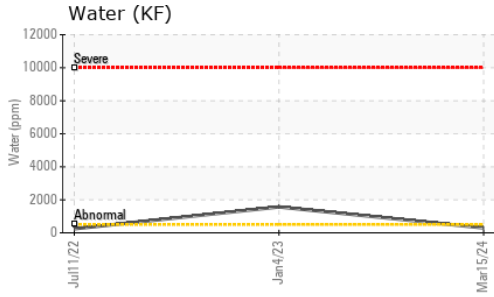






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	● HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.1	44.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

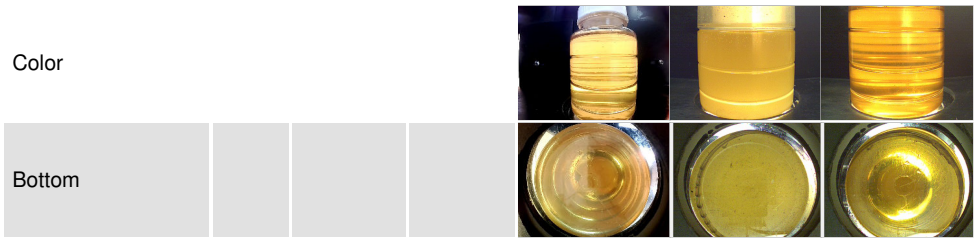

## GRAPHS

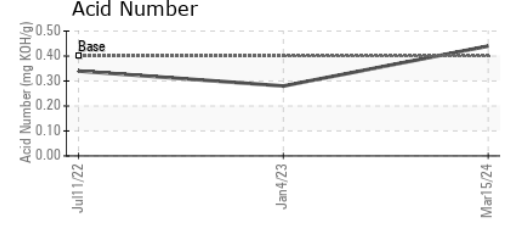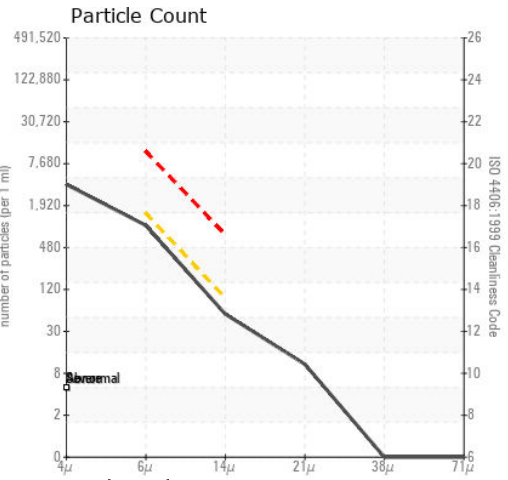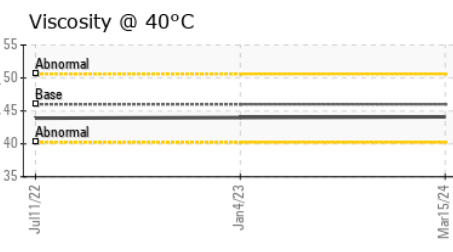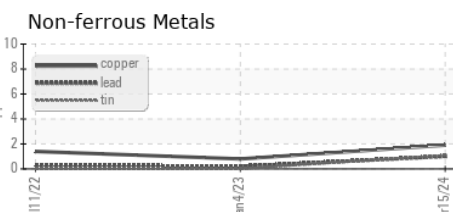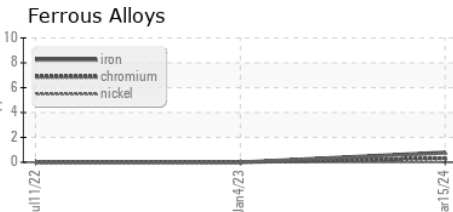

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC121611  
**Lab Number** : 06135676  
**Unique Number** : 10955141  
**Test Package** : IND 2  
**Received** : 01 Apr 2024  
**Tested** : 03 Apr 2024  
**Diagnosed** : 04 Apr 2024 - Don Baldrige

**CENTRAL FLORIDA GLASS & MIRROR**  
 4441 US HWY 27 S  
 SEBRING, FL  
 US 33870  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)