

OIL ANALYSIS REPORT

Area **ENGINE ROOM** Machine Id **C-7 (S/N 08732-002-1-01-01)**

Refrigeration Compressor

USPI 1009-68 SC (35 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

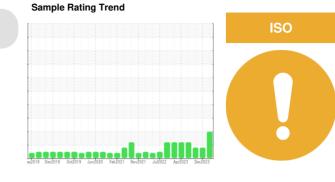



SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0008168	USP0005200	USP243640
Sample Date		Client Info		28 Mar 2024	27 Dec 2023	15 Oct 2023
Machine Age	hrs	Client Info		25387	29387	25386
Oil Age	hrs	Client Info		12042	29387	25386
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				ATTENTION	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	3	<1	1
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	<1	0	<1
Copper	ppm	ASTM D5185m	>8	<1	0	<1
Tin	ppm	ASTM D5185m	>4	1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	<1	2
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water	%	ASTM D6304	>0.01	0.002	0.002	0.003
ppm Water	ppm	ASTM D6304	>100	24	25	25.1
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	e 18647	12671	17509
Particles >6µm		ASTM D7647	>2500	<u> </u>	1470	2342
Particles >14µm		ASTM D7647	>320	9374	19	50
Particles >21µm		ASTM D7647	>80	<u> </u>	5	15
Particles >38µm		ASTM D7647	>20	4	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	21/19/16	21/18/11	21/18/13
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015


Contact/Location: Service Manager - TYSROC Page 1 of 2





OIL ANALYSIS REPORT





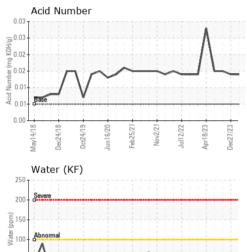






55

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	67.0	67.4	67.4
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		

Bottom

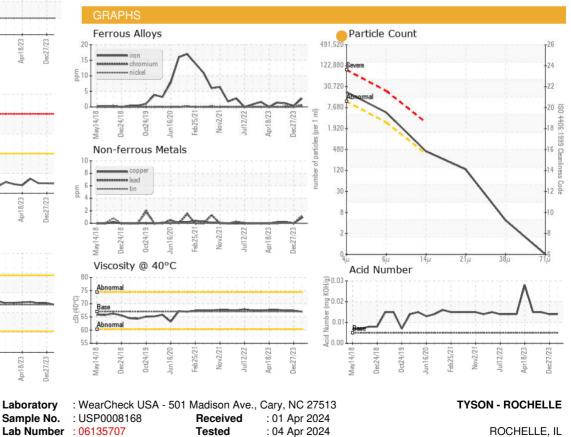

: 04 Apr 2024 - Doug Bogart



Т:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Unique Number : 10955172

Test Package : IND 2

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

Report Id: TYSROC [WUSCAR] 06135707 (Generated: 04/05/2024 19:57:17) Rev: 1

Certificate 12367

Contact/Location: Service Manager - TYSROC Page 2 of 2