




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

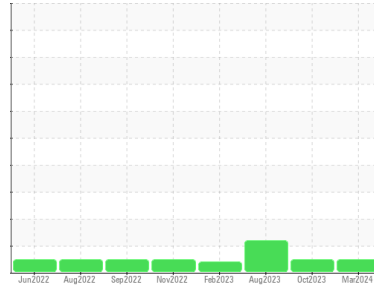

Machine Id
GRBX-NCO-0001 ASRI RIG GRBX-NCO-0001
 Component
Gearbox
 Fluid
GEAR OIL SAE 75W90 (5 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			HLC0002975	HLC0002551	HLC0001923
Sample Date	Client Info			23 Mar 2024	20 Oct 2023	16 Aug 2023
Machine Age	hrs	Client Info		26917	24030	22620
Oil Age	hrs	Client Info		1000	1400	350
Oil Changed	Client Info			Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	24	25	17
Chromium	ppm	ASTM D5185m	>15	<1	0	<1
Nickel	ppm	ASTM D5185m	>15	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	3
Aluminum	ppm	ASTM D5185m	>25	2	0	0
Lead	ppm	ASTM D5185m	>100	1	0	<1
Copper	ppm	ASTM D5185m	>200	12	4	3
Tin	ppm	ASTM D5185m	>25	2	0	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	<1



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	216	235	306
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	12	3	<1	0
Calcium	ppm	ASTM D5185m	150	18	3	2
Phosphorus	ppm	ASTM D5185m	1650	1514	1441	1453
Zinc	ppm	ASTM D5185m	125	13	5	5
Sulfur	ppm	ASTM D5185m	22500	27243	22717	27291

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	7	5	6
Sodium	ppm	ASTM D5185m		5	3	2
Potassium	ppm	ASTM D5185m	>20	2	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	---	---	▲ 40682
Particles >6µm		ASTM D7647	>5000	---	---	● 5744
Particles >14µm		ASTM D7647	>640	---	---	121
Particles >21µm		ASTM D7647	>160	---	---	19
Particles >38µm		ASTM D7647	>40	---	---	1
Particles >71µm		ASTM D7647	>10	---	---	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	---	---	▲ 23/20/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	2.63	2.10	1.68


OIL ANALYSIS REPORT

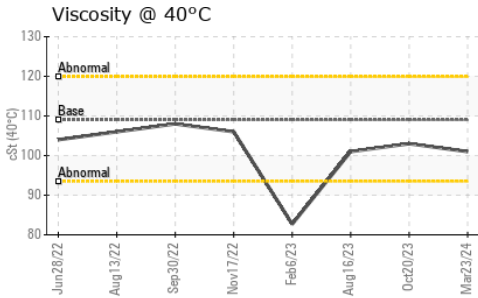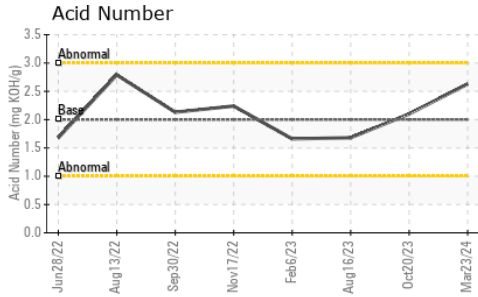





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	101	103	101

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

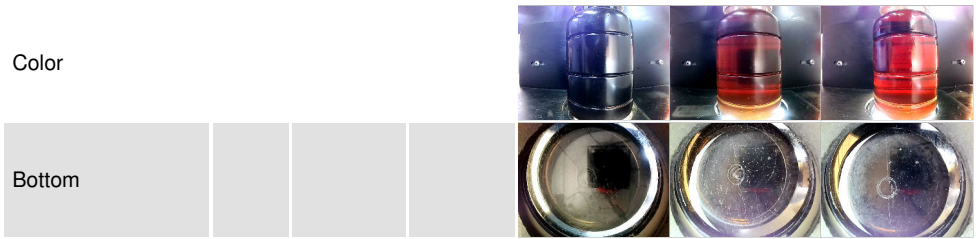

GRAPHS

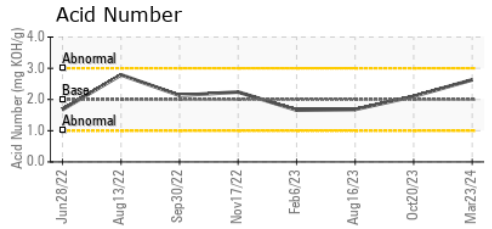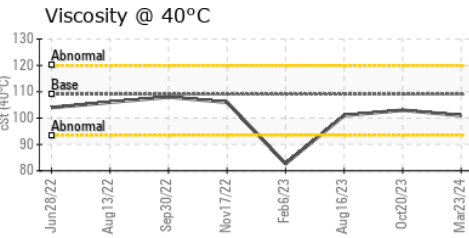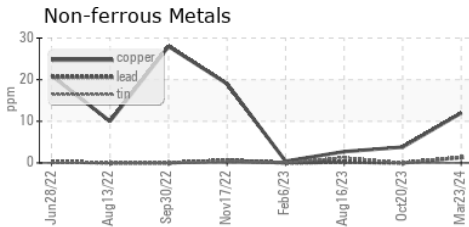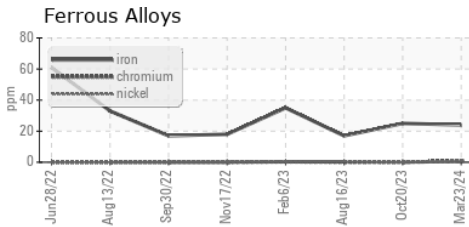

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HLC0002975 **Received** : 02 Apr 2024
Lab Number : **06135735** **Tested** : 04 Apr 2024
Unique Number : 10955200 **Diagnosed** : 04 Apr 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

HILCORP EXPLORATION ALASKA - MILNE POINT
 1000 MILNE POINT RD
 PRUDOE BAY, AK
 US 99734
 Contact: Evan Reilly
 evan.reilly@hilcorp.com
 T: (907)670-3231
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)