



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
LIEBHERR LR 1600 CR 6610 - OUTER (S/N 74515)

Component
Rear Right Track Drive

Fluid
GEAR OIL ISO 220 (--- GAL)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0704489	---	---
Sample Date	Client Info			25 Mar 2024	---	---
Machine Age	hrs	Client Info		19337	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>1000	10	---	---
Chromium	ppm	ASTM D5185m	>30	<1	---	---
Nickel	ppm	ASTM D5185m	>7	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	0	---	---
Lead	ppm	ASTM D5185m	>50	16	---	---
Copper	ppm	ASTM D5185m	>100	19	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	---	---
Barium	ppm	ASTM D5185m	15	0	---	---
Molybdenum	ppm	ASTM D5185m	15	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	50	1	---	---
Calcium	ppm	ASTM D5185m	50	6	---	---
Phosphorus	ppm	ASTM D5185m	350	309	---	---
Zinc	ppm	ASTM D5185m	100	95	---	---
Sulfur	ppm	ASTM D5185m	12500	5171	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>150	0	---	---
Sodium	ppm	ASTM D5185m		3	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---



OIL ANALYSIS REPORT



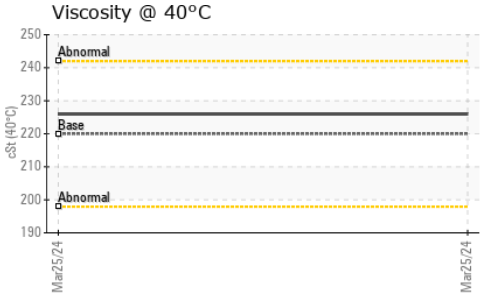


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	226	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

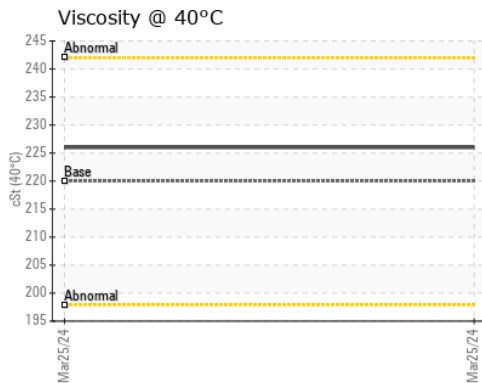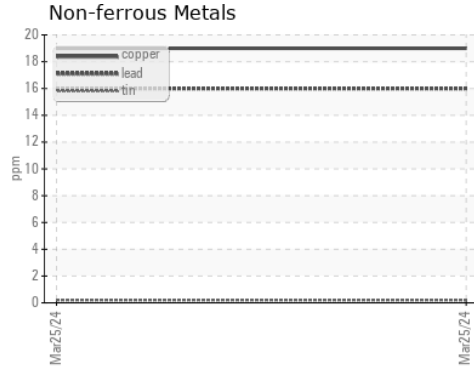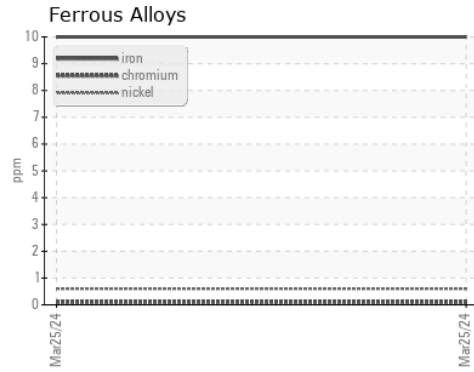

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0704489
Lab Number : 06135797
Unique Number : 10955262
Test Package : CONST

Received : 01 Apr 2024
Tested : 02 Apr 2024
Diagnosed : 02 Apr 2024 - Wes Davis

BUCKNER HEAVY LIFT
 4732 NC 54 EAST
 GRAHAM, NC
 US 27253-9215
 Contact: TIM BARE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TBARE@BUCKNERCOMPANIES.COM

T:

F: (336)376-4090