




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**MINING**  
Machine Id  
**ME-81 KOMATSU D155AX-8 100135**  
Component  
**Diesel Engine**  
Fluid  
**SHELL RIMULA SUPER SAE 15W40 (9 GAL)**

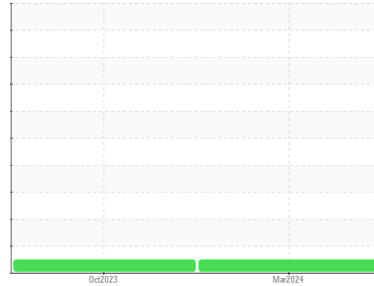

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0908953</b>	WC0864718	---
Sample Date	Client Info		<b>26 Mar 2024</b>	30 Oct 2023	---
Machine Age	hrs	Client Info	<b>5575</b>	5246	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>21</b>	28	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>15</b>	16	---
Copper	ppm	ASTM D5185m >330	<b>0</b>	2	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>1</b>	3	---
Barium	ppm	ASTM D5185m	<b>0</b>	5	---
Molybdenum	ppm	ASTM D5185m	<b>68</b>	82	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>626</b>	1141	---
Calcium	ppm	ASTM D5185m 2840	<b>1791</b>	1478	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1160</b>	1348	---
Zinc	ppm	ASTM D5185m 1270	<b>1394</b>	1567	---
Sulfur	ppm	ASTM D5185m 2829	<b>3732</b>	3619	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	---
Sodium	ppm	ASTM D5185m	<b>7</b>	6	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.1</b>	1.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.8</b>	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.8</b>	23.6	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.6</b>	19.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.6	<b>8.8</b>	9.9	---







# OIL ANALYSIS REPORT

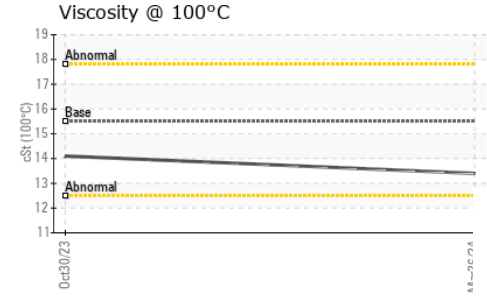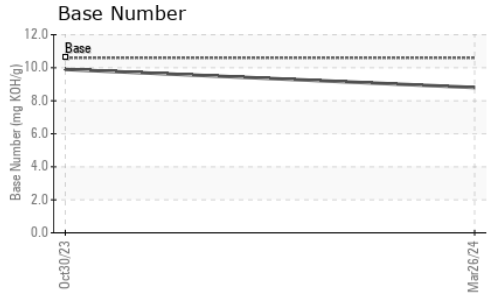

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.4</b>	14.1	---

### GRAPHS

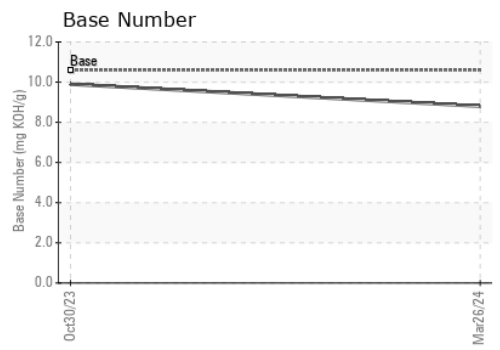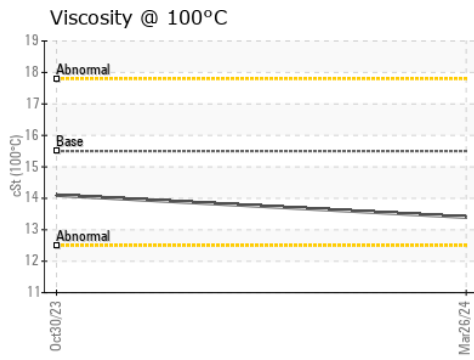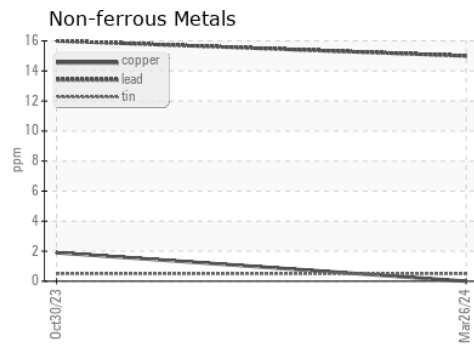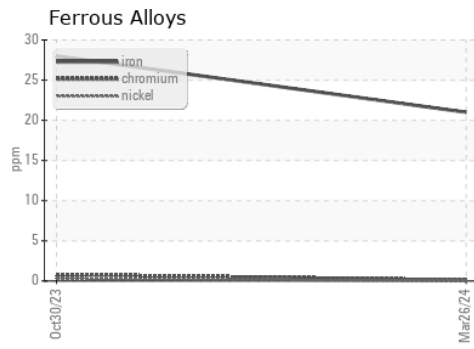

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0908953      **Received** : 02 Apr 2024  
**Lab Number** : **06136053**      **Tested** : 03 Apr 2024  
**Unique Number** : 10955518      **Diagnosed** : 03 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**COVIA - GIUNO - 025**  
 421 MAIN STREET  
 GIUNO, AR  
 US 72540  
 Contact: DANIEL DELGADO  
 daniel.delgado@coviacorp.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)