

OIL ANALYSIS REPORT

FUEL

Machine Id

MACK NOT GIVEN LF0001592

Diesel Engine Fluid MACK OEM 5W30 (--- QTS)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.


Fluid Condition


Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|-------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | LF0001592 | | |
| Sample Date | | Client Info | | 29 Mar 2024 | | |
| Machine Age | mls | Client Info | | 0 | | |
| Oil Age | mls | Client Info | | 2879 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | SEVERE | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | | |
| Glycol | | WC Method | | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >120 | 8 | | |
| Chromium | ppm | ASTM D5185m | >20 | <1 | | |
| Nickel | ppm | ASTM D5185m | >15 | 0 | | |
| Titanium | ppm | ASTM D5185m | >2 | 0 | | |
| Silver | ppm | ASTM D5185m | >3 | <1 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 5 | | |
| Lead | ppm | ASTM D5185m | >40 | 0 | | |
| Copper | ppm | ASTM D5185m | >330 | 4 | | |
| Tin | ppm | ASTM D5185m | >15 | 1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 217 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 62 | | |
| Manganese | ppm | ASTM D5185m | | 2 | | |
| Magnesium | ppm | ASTM D5185m | | 338 | | |
| Calcium | ppm | ASTM D5185m | | 687 | | |
| Phosphorus | ppm | ASTM D5185m | | 332 | | |
| Zinc | ppm | ASTM D5185m | | 384 | | |
| Sulfur | ppm | ASTM D5185m | | 1303 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <u> </u> | | |
| Sodium | ppm | ASTM D5185m | | 2 | | |
| Potassium | ppm | ASTM D5185m | >20 | 7 | | |
| Fuel | % | ASTM D3524 | >3.0 | 48.8 | | |
| INFRA-RED | | method | limit/base | current | history1 | history2 |
| Soot % | % | *ASTM D7844 | >4 | 0.1 | | |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.1 | | |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.4 | | |
| FLUID DEGRADA | | method | limit/base | current | history1 | history2 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 11.9 | | |
| | | | | | | |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 7.6 | | |



OIL ANALYSIS REPORT

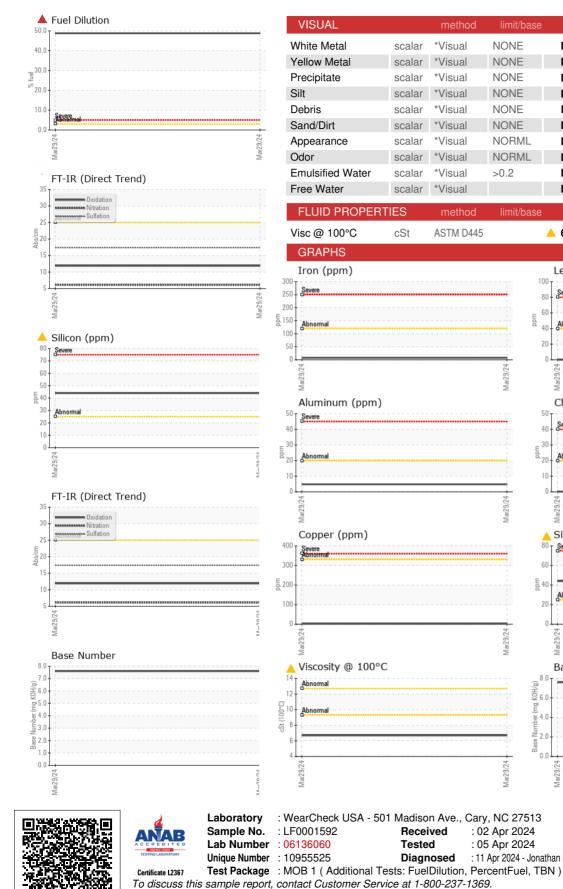

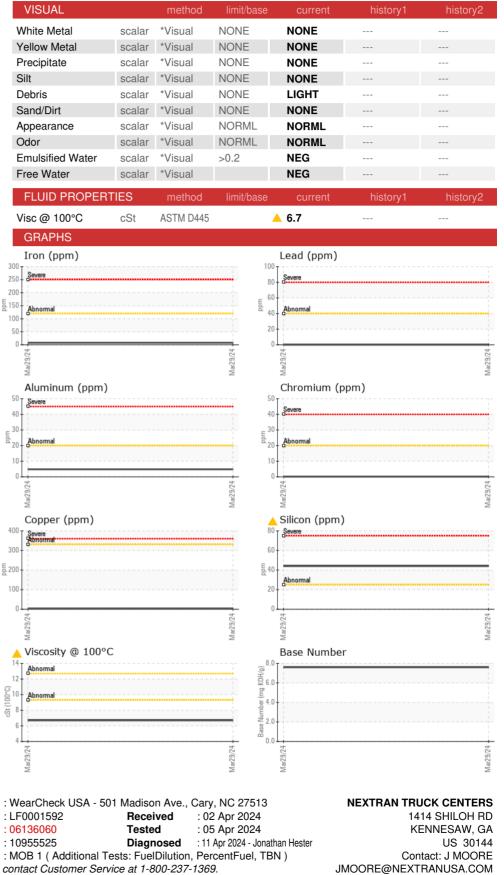

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: NEXKEN [WUSCAR] 06136060 (Generated: 04/12/2024 04:32:53) Rev: 1

Contact/Location: J MOORE - NEXKEN

T:

F: