

### **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

#### Machine Id

# U1 FD FAN MOTOR 1B

Component Outboard Blower Fluid CHEVRON GST OIL ISO 68 (--- LTR)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION					
Sample Number		Client Info		WC0915206		
Sample Date		Client Info		01 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		15		
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel		ASTM D5185m		0		
Titanium	ppm	ASTM D5185m	>20	۰ <1		
	ppm					
Silver	ppm	ASTM D5185m	00	0		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m		14		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		819		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304		0.002		
ppm Water	ppm	ASTM D6304		18		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	93448		
Particles >6µm		ASTM D7647	>640	203		
Particles >14µm		ASTM D7647	>80	14		
Particles >21µm		ASTM D7647	>20	2		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<b>19/15/11</b>		
		( )			lates of the	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN) (52:50) Rev: 1	mg KOH/g	ASTM D8045		0.085 Contact/Location	on: NEAL HANC	 OCK - SAI GI


Report Id: SALGLE [WUSCAR] 06136359 (Generated: 07/17/2024 07:52:50) Rev: 1

0.085 ---- Contact/Location: NEAL HANCOCK - SALGLE



## **OIL ANALYSIS REPORT**

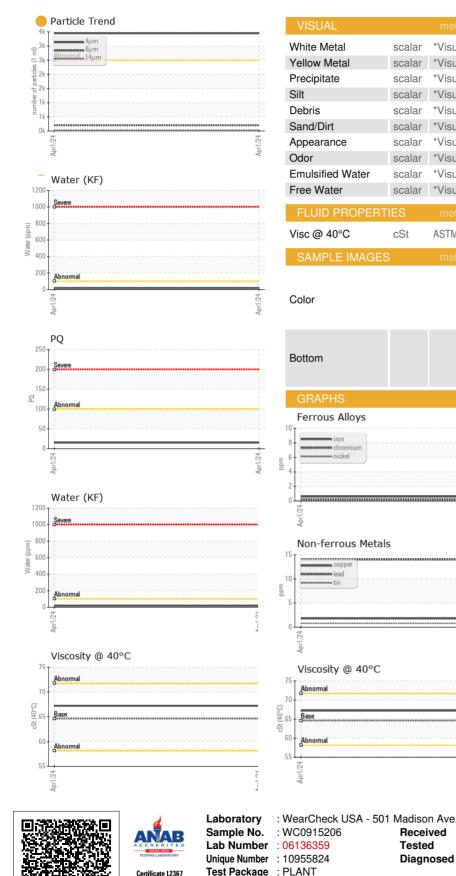

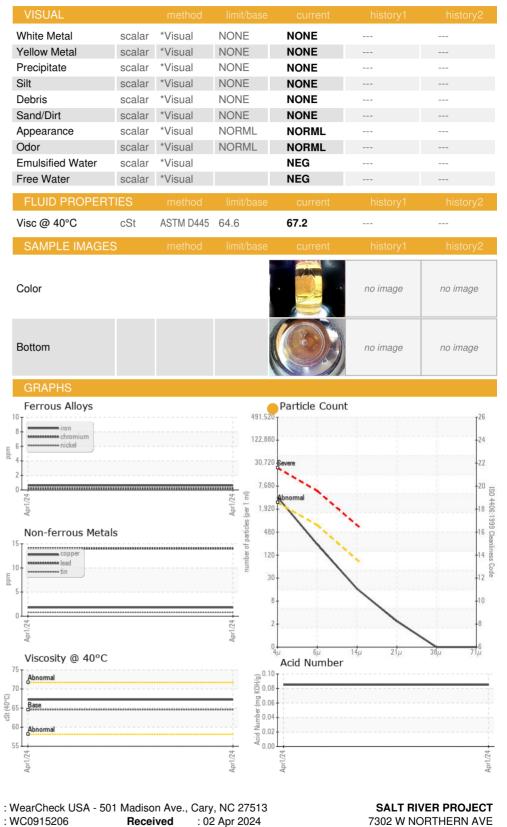

: 03 Apr 2024

: 04 Apr 2024 - Don Baldridge

7302 W NORTHERN AVE GLENDALE, AZ US 85303 Contact: NEAL HANCOCK neal.hancockjr@srpnet.com T: (602)236-3238 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) E:

Report Id: SALGLE [WUSCAR] 06136359 (Generated: 07/17/2024 07:52:50) Rev: 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Contact/Location: NEAL HANCOCK - SALGLE