




OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
DICK LAVY
 Machine Id
DICK LAVY 4959
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

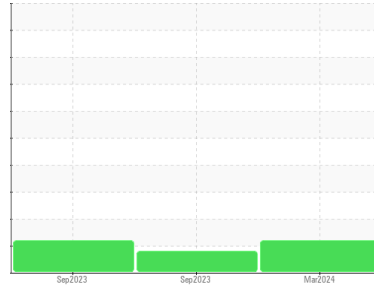

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900816	WC0853929	WC0853928
Sample Date	Client Info		11 Mar 2024	10 Sep 2023	09 Sep 2023
Machine Age	mls	Client Info	56198	455	455
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ATTENTION	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	82	0	11
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	0	0
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	<1	0	0
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	193	286	166
Barium	ppm	ASTM D5185m 200	0	0	<1
Molybdenum	ppm	ASTM D5185m 12	<1	0	0
Manganese	ppm	ASTM D5185m	4	<1	4
Magnesium	ppm	ASTM D5185m 12	2	<1	2
Calcium	ppm	ASTM D5185m 150	7	0	17
Phosphorus	ppm	ASTM D5185m 1650	1066	1427	1073
Zinc	ppm	ASTM D5185m 125	5	5	23
Sulfur	ppm	ASTM D5185m 22500	22009	25925	24876

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	8	<1	9
Sodium	ppm	ASTM D5185m	2	<1	3
Potassium	ppm	ASTM D5185m >20	2	3	5
Water	%	ASTM D6304 >.2	0.038	0.054	0.064
ppm Water	ppm	ASTM D6304 >2000	385	542.2	646.6

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 152339	● 32170	▲ 91394
Particles >6µm	ASTM D7647	>5000	▲ 62853	● 2935	▲ 11770
Particles >14µm	ASTM D7647	>640	227	● 29	● 50
Particles >21µm	ASTM D7647	>160	22	● 4	● 5
Particles >38µm	ASTM D7647	>40	0	● 0	● 0
Particles >71µm	ASTM D7647	>10	0	● 0	● 0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/23/15	● 22/19/12	▲ 24/21/13


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.51	2.61	3.54




OIL ANALYSIS REPORT


Particle Trend

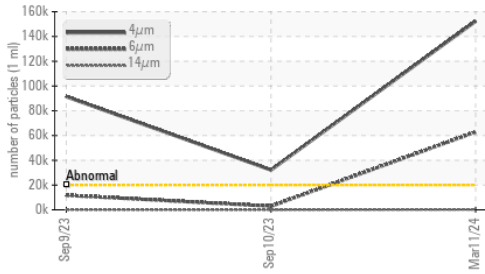


Water (KF)

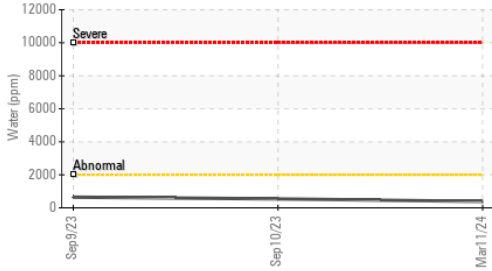


Viscosity @ 100°C

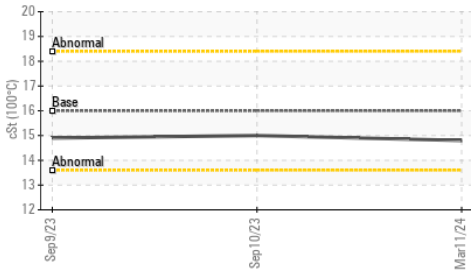

Water (KF)

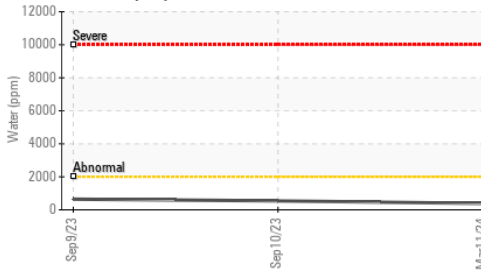

Viscosity @ 100°C

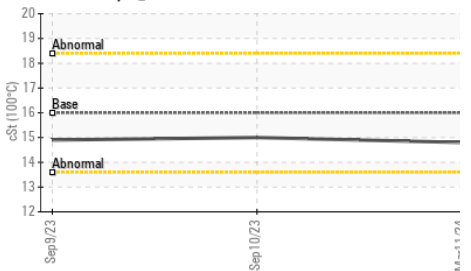

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	105	98.1
Visc @ 100°C	cSt	ASTM D445	16.0	14.8	14.9
Viscosity Index (VI)	Scale	ASTM D2270	157	149	158

SAMPLE IMAGES

Color




Bottom

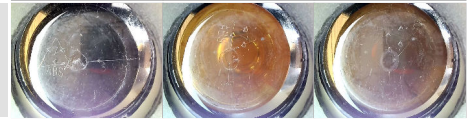


GRAPHS


Ferrous Alloys

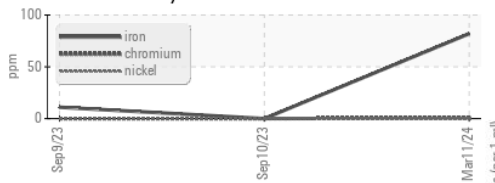


Non-ferrous Metals

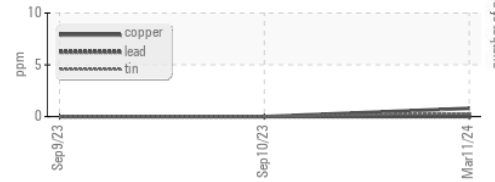


Viscosity @ 40°C

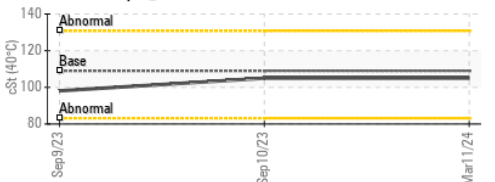

Particle Count

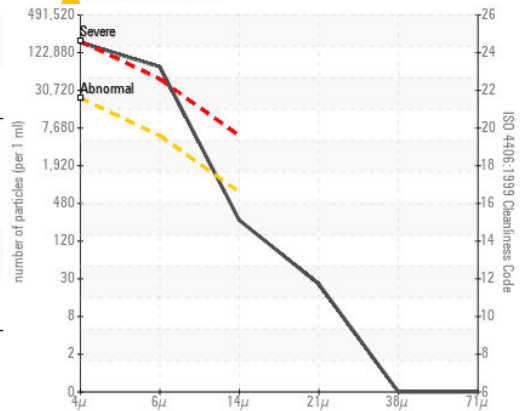

Acid Number

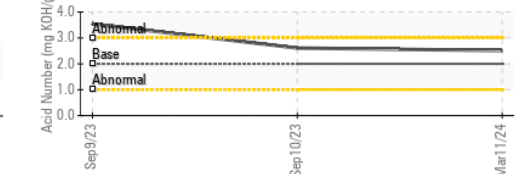

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0900816

Lab Number : 06136369

Unique Number : 10955834

Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

Received : 02 Apr 2024

Tested : 03 Apr 2024

Diagnosed : 04 Apr 2024 - Don Baldrige

BASF - GIANNA CREDAROLI

500 WHITE PLAINS RD

TARRYTOWN, NY

US 10591

Contact: GIANNA CREDAROLI

gianna.credaroli@basf.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)