




OIL ANALYSIS REPORT

Sample Rating Trend

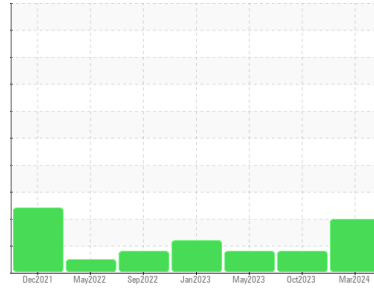

ISO



Area
DICK LAVY
 Machine Id
DICK LAVY 4851
 Component
Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900819	WC0853965	WC0815576
Sample Date	Client Info		03 Mar 2024	20 Oct 2023	17 May 2023
Machine Age	mls	Client Info	318589	256690	190226
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	213	214	171
Chromium	ppm	ASTM D5185m >10	2	2	1
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	1	0	0
Aluminum	ppm	ASTM D5185m >25	3	2	<1
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	2	2	2
Tin	ppm	ASTM D5185m >10	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	157	170	136
Barium	ppm	ASTM D5185m 200	3	0	0
Molybdenum	ppm	ASTM D5185m 12	<1	1	<1
Manganese	ppm	ASTM D5185m	17	18	15
Magnesium	ppm	ASTM D5185m 12	10	8	8
Calcium	ppm	ASTM D5185m 150	26	23	24
Phosphorus	ppm	ASTM D5185m 1650	1044	1075	1113
Zinc	ppm	ASTM D5185m 125	36	19	24
Sulfur	ppm	ASTM D5185m 22500	24724	27630	29466

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	33	39	23
Sodium	ppm	ASTM D5185m	6	4	4
Potassium	ppm	ASTM D5185m >20	5	4	3
Water	%	ASTM D6304 >.2	0.030	0.027	0.025
ppm Water	ppm	ASTM D6304 >2000	306	273	257.8

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 107779	▲ 77006	▲ 53132
Particles >6µm	ASTM D7647	>5000	▲ 27777	4605	1919
Particles >14µm	ASTM D7647	>640	▲ 897	20	18
Particles >21µm	ASTM D7647	>160	▲ 168	3	4
Particles >38µm	ASTM D7647	>40	3	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/17	▲ 23/19/11	▲ 23/18/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.95	2.51	2.69




OIL ANALYSIS REPORT

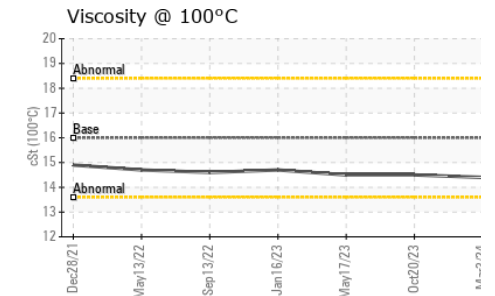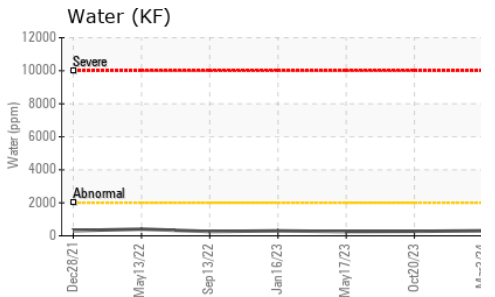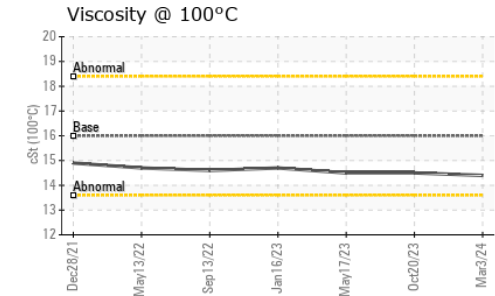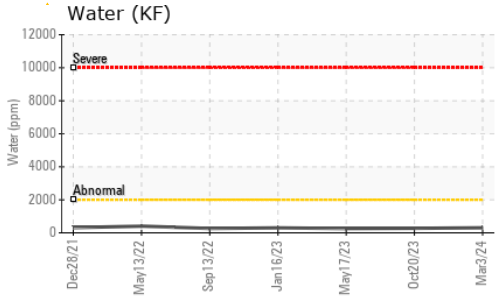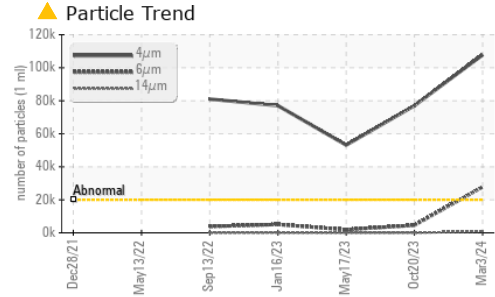






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	96.2	96.3
Visc @ 100°C	cSt	ASTM D445	16.0	14.5	14.5
Viscosity Index (VI)	Scale	ASTM D2270	157	156	156

SAMPLE IMAGES

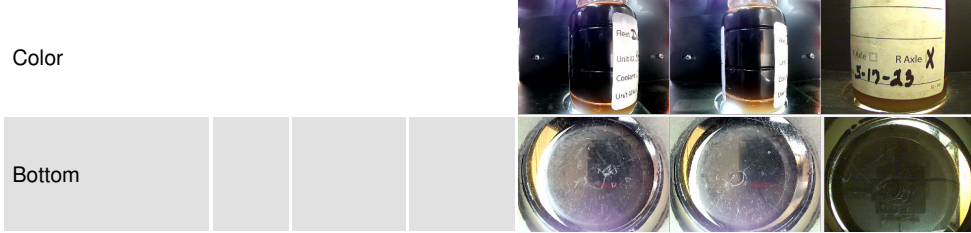

GRAPHS

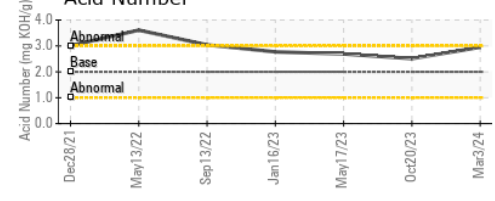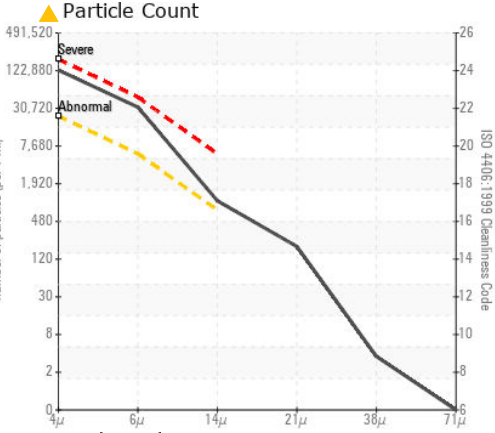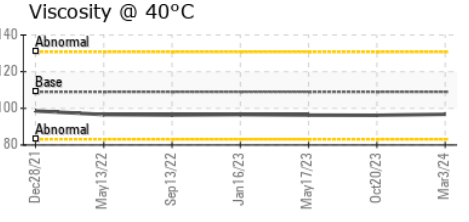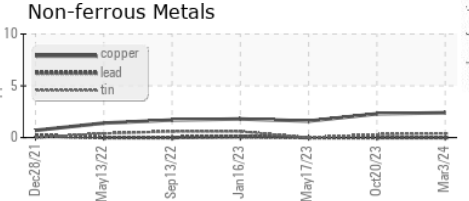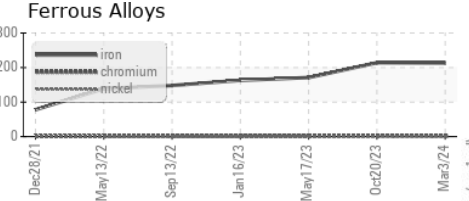

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900819 **Received** : 02 Apr 2024
Lab Number : **06136374** **Tested** : 03 Apr 2024
Unique Number : 10955839 **Diagnosed** : 04 Apr 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)