

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7782205

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Nov202	2 May2023	NovŽ023 Ma	w2024	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015917	KCPA06998	KCP53770
Sample Date		Client Info		26 Mar 2024	09 Nov 2023	08 May 2023
Machine Age	hrs	Client Info		9372	8012	6042
Oil Age	hrs	Client Info		1460	0	1269
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	<1
Silver	ppm	ASTM D5185m	>2	1	0	<1
Aluminum	ppm	ASTM D5185m	>10	3	<1	2
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	14	22	14
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	7	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	3	<1	10
Calcium	ppm	ASTM D5185m	0	3	<1	0
Phosphorus	ppm	ASTM D5185m	0	0	18	0
Zinc	ppm	ASTM D5185m	0	0	0	6
Sulfur	ppm	ASTM D5185m	23500	22654	20487	20242
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		<1	0	4
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water	%	ASTM D6304	>0.05	0.044	0.011	0.012
ppm Water	ppm	ASTM D6304	>500	448	110.3	129.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8552	7167	781
Particles >6µm		ASTM D7647	>1300	1032	1773	174
Particles >14µm		ASTM D7647	>80	30	84	12
Particles >21µm		ASTM D7647	>20	7	16	3
Particles >38µm		ASTM D7647	>4	1	0	1
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/17/12	20/18/14	17/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.46	0.31	0.41


Report Id: AAOLON [WUSCAR] 06136397 (Generated: 04/04/2024 19:05:29) Rev: 1


Contact/Location: Service Manager - AAOLON Page 1 of 2



OIL ANALYSIS REPORT

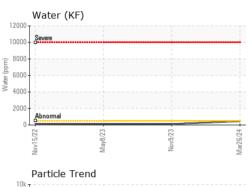




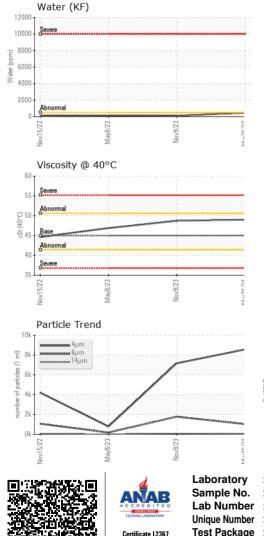



Bottom

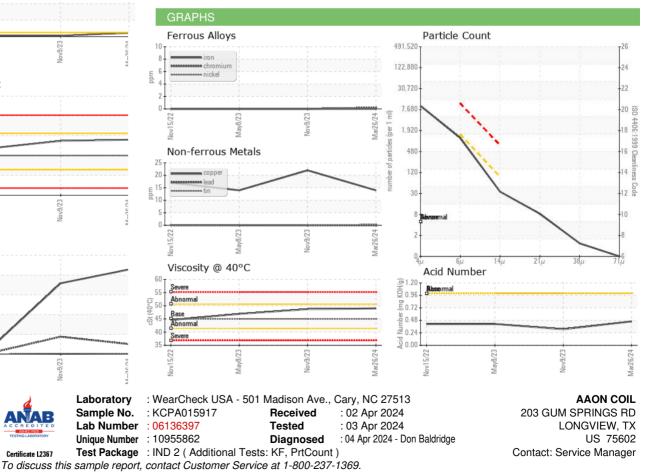

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - AAOLON Page 2 of 2

T:

F: