


OIL ANALYSIS REPORT

Sample Rating Trend

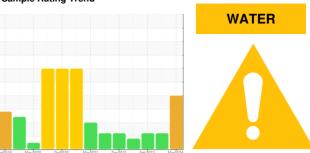

Machine Id

KAESER CSD 75 6592344 (S/N 1515)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

The tin level is abnormal. All other component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Oct2019 N	Лау2020 Осt2020	Mar2021 Dec2021 Feb2023	Mar2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016134	KC124522	KCP55134
Sample Date		Client Info		25 Mar 2024	12 Sep 2023	14 Feb 2023
Machine Age	hrs	Client Info		33486	29400	25000
Oil Age	hrs	Client Info		1085	0	4500
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	1	3
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	14	5	17
Tin	ppm	ASTM D5185m	>10	<u>^</u> 62	<u></u> ▲ 68	△ 33
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	<1	1	<1
Calcium	ppm	ASTM D5185m	2	3	0	0
Phosphorus	ppm	ASTM D5185m	_	<1	0	0
Zinc	ppm	ASTM D5185m		0	0	3
Sulfur	ppm	ASTM D5185m		16268	8760	15621
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	0
Sodium	ppm	ASTM D5185m	0.0	0	0	<1
Potassium	ppm	ASTM D5185m		2	<1	0
Water	%	ASTM D6304	>0.05	<u>^</u> 0.203	0.006	0.00
ppm Water	ppm	ASTM D6304	>500	<u>^</u> 2030	62.0	0.00
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	1000	1549		
Particles >6µm		ASTM D7647		844		
Particles >14µm		ASTM D7647	>80	144		
Particles >21µm		ASTM D7647		<u>48</u>		
Particles >38μm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/17/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.45	0.42	0.41




OIL ANALYSIS REPORT

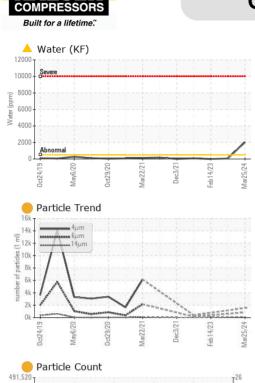

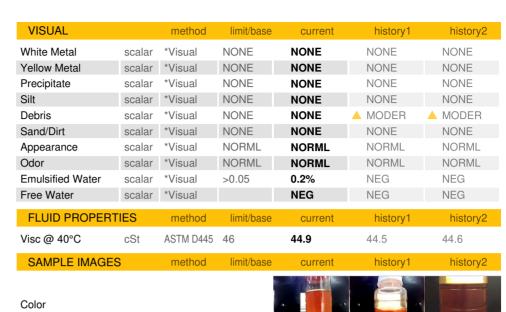

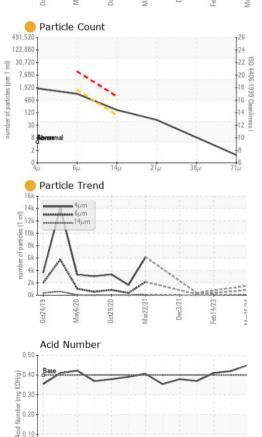

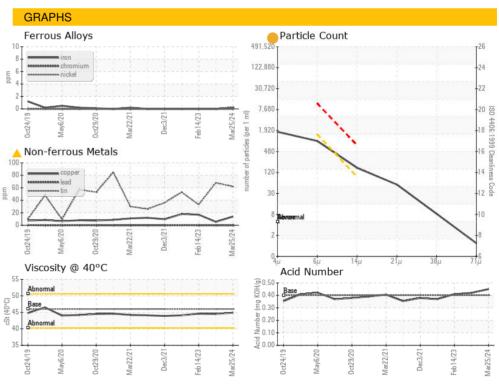



Lab Number

Feb14/23

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Bottom

: KCPA016134 : 06136402 Unique Number: 10955867

Received : 02 Apr 2024 Tested Diagnosed

: 09 Apr 2024 : 09 Apr 2024 - Jonathan Hester

US 75109 Contact: Service Manager

3801 E HWY 31

CORSICANA, TX

CRESLINE PLASTIC PIPE

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: