

OIL ANALYSIS REPORT

Sample Rating Trend

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

KAESER 8229784

DIAGNOSIS

Machine Id

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015971	KCPA006970	KCP52907
Sample Date		Client Info		25 Mar 2024	09 Nov 2023	09 May 2023
Machine Age	hrs	Client Info		9495	8225	6813
Oil Age	hrs	Client Info		1270	0	1277
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				ATTENTION	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	3	<1	2
Lead		ASTM D5185m	>10	0	0	0
Copper	ppm ppm	ASTM D5185m	>50	17	24	13
Tin		ASTM D5185m	>10	2	0	<1
Vanadium	ppm	ASTM D5185m	210	0	0	0
Cadmium	ppm ppm	ASTM D5185m		0	0	0
	ррп		11 11 /1	-	-	-
ADDITIVES		method	limit/base		history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	6	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	1	<1	19
Calcium	ppm	ASTM D5185m		3	0	0
Phosphorus	ppm	ASTM D5185m	0	<1	17	0
Zinc	ppm	ASTM D5185m		0	0	7
Sulfur	ppm	ASTM D5185m	23500	23337	20178	20704
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	2
Sodium	ppm	ASTM D5185m		0	0	6
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>0.05	0.007	0.012	0.016
ppm Water	ppm	ASTM D6304	>500	77	123.2	165.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		6284	4664	
Particles >6µm		ASTM D7647	>1300	<mark> </mark> 1628	1809	
Particles >14µm		ASTM D7647	>80	33	42	
Particles >21µm		ASTM D7647	>20	6	6	
Particles >38µm		ASTM D7647	>4	1	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	e 20/18/12	9/18/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.46	0.42	0.39


Contact/Location: Service Manager - AAOLON Page 1 of 2



OIL ANALYSIS REPORT

Ви	lift for a lifetime				
	Particle Tre	nd			VISU
CL	4μm				White I
(Im I) sahicles (I mI) 5 4k 5 4k 1k 1k	14μm	J			Yellow
pitted at		na 700 100 700 700 700 700	\$60 Tel 20 Tel 2		Precipi
10 JK -		a th M th M			Silt
1k-	particular and an oral particular for	the set of the set of the set of the	All 20 die der mit 20 millionennen einen		Debris
0k ·	N N	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	en e	4	Sand/E
	Nov21/22	May9/23	Nov9/23	Mar25/24	Appear
		~	_	2	Odor Emulsi
12000	Water (KF)				Free W
0000	Severe				FLUI
3000.					
000					Visc @
000					SAM
000	Abnormal				
0.		9/23 -	. 52/6	5/24	Color
	Nov21/22	May9/23	Nov9/23	Mar25/24	
	Acid Numb	۹r			
20.	T 7				Bottom
96·	Base mal				Dottom
72.					
.48					
.96 .72 .48					GRA
.00					Ferro
	Nov21/22	May9/23	Nov9/23	A C. D A	¹⁰ T
	Nov	W	N		8 - E 6 -
20	Water (KF)				E 6- 4-
00. 00.	Severe				2
00.	-				Nov21/22
00.					
000					Non-f
000	Abaam=				20
0.	Abnormal	33	33	V I	E 15- 10-
	Nov21/22	May9/23	Nov9/23	A C J C MA	5
	_			2	1/22
60.	Viscosity @	40°C			Nov21/22
55.	Severe				Visco
	Abnormal				55 Severe
50 45	Base				Abnorm
	Abnormal				40 Abnorm
40.	Severe				35
35.	1/22	9/23 -	- 23	V Cr.	Nov21/22
	Nov21/	May9/23	Nov9/23	AC JC-M	No
		1) Lab	oratorv	: WearCh

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.4	49.2	47.0
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color				•		
D						

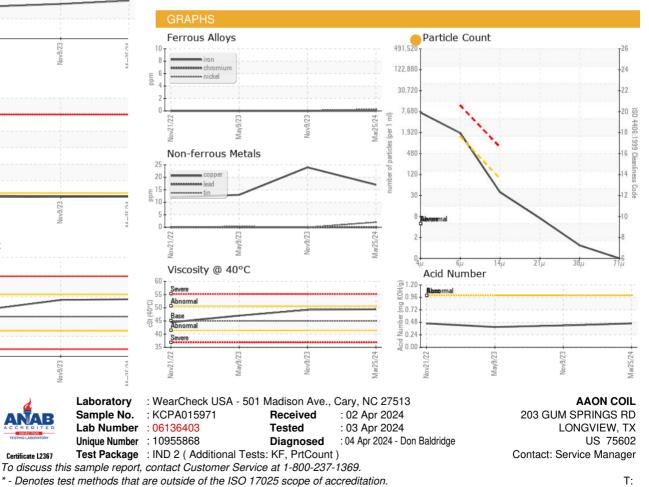

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

Certificate L2367