

# **OIL ANALYSIS REPORT**

#### Sample Rating Trend

## NORMAL

# Machine Id FES TYSNEWP2 11B (S/N 00645-021-1-01-02)

Refrigeration Compressor

Fluic USPI ALT-68 SC (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>NATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0008152	USP0004698	USP0001796
Sample Date		Client Info		21 Mar 2024	14 Dec 2023	22 Sep 2023
Machine Age	hrs	Client Info		28949	27661	226349
Oil Age	hrs	Client Info		28949	67661	226349
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	1	0	0
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	<1	0	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	0	1
Phosphorus	ppm	ASTM D5185m		<1	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	10
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	2	2
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	2	0	1
Water	%	ASTM D6304	>0.01	0.007	0.008	0.006
ppm Water	ppm	ASTM D6304	>100	71	81	64.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	788	250	202
Particles >6µm		ASTM D7647	>2500	151	89	69
Particles >14µm		ASTM D7647	>320	6	13	10
Particles >21µm		ASTM D7647	>80	1	5	5
Particles >38µm		ASTM D7647	>20	0	1	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/14/10	15/14/11	15/13/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.014


Contact/Location: RICK DUVALL - TYSNHOLP2




# **OIL ANALYSIS REPORT**

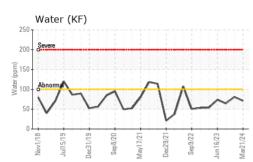

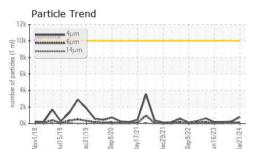


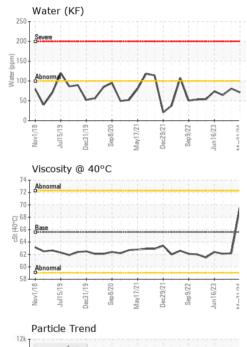





Bottom

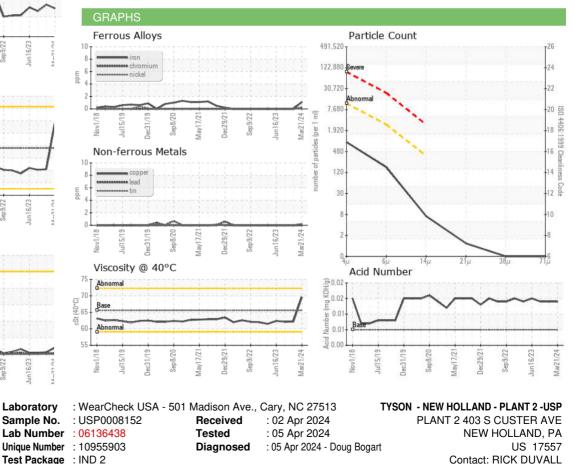

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (800)755-4572 F: (402)423-6661

Report Id: TYSNHOLP2 [WUSCAR] 06136438 (Generated: 04/06/2024 00:09:41) Rev: 1

Certificate 12367

Contact/Location: RICK DUVALL - TYSNHOLP2

Page 2 of 2