

## **OIL ANALYSIS REPORT**

# Sample Rating Trend NORMAL

Machine Id

## KAESER AIRCENTER SK 15 5754156 (S/N 2073) Component Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>ATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015366	KCP38544	KC73393
Sample Date		Client Info		13 Mar 2024	14 Mar 2022	04 Feb 2021
Machine Age	hrs	Client Info		17538	13184	10469
Oil Age	hrs	Client Info		4354	2715	2642
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m		<1	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		4	5	4
Tin	ppm	ASTM D5185m	>10	- <1	0	0
Antimony	ppm	ASTM D5185m	210			0
Vanadium	ppm	ASTM D5185m		 <1	0	0
Cadmium		ASTM D5185m		0	0	0
	ppm			U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	24	39	39
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	3	5
Zinc	ppm	ASTM D5185m		18	5	0
Sulfur	ppm	ASTM D5185m		20941	16006	16602
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		12	11	11
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Water	%	ASTM D6304	>0.05	0.011	0.012	0.018
ppm Water	ppm	ASTM D6304	>500	117	121.4	181.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		555		1477
Particles >6µm		ASTM D7647	>1300	119		507
Particles >14µm		ASTM D7647	>80	11		48
Particles >21µm		ASTM D7647	>20	3		11
Particles >38µm		ASTM D7647	>4	0		0
Particles >71µm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>/17/13	16/14/11		16/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.356	0.355
:51:16) Rev: 1						


Report Id: LINMCA [WUSCAR] 06136904 (Generated: 04/04/2024 20:51:16) Rev: 1


Contact/Location: SHOP ? - LINMCA




## **OIL ANALYSIS REPORT**

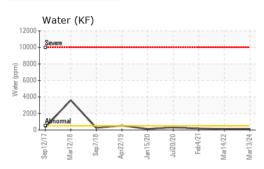


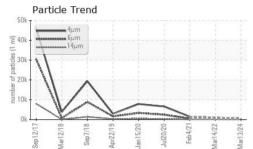

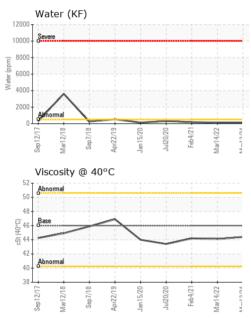



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	🔺 MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.4	44.1	44.2
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						

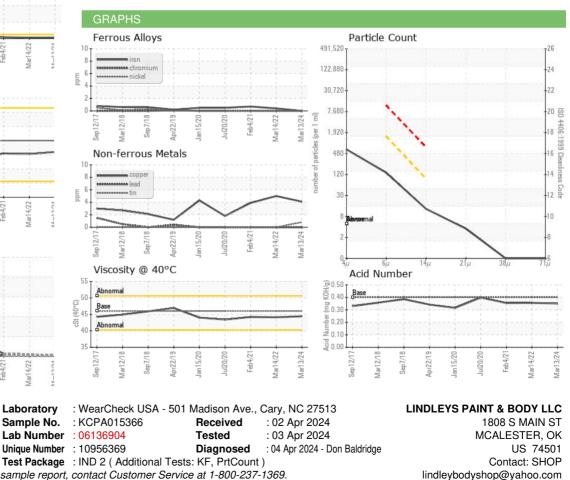

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: LINMCA [WUSCAR] 06136904 (Generated: 04/04/2024 20:51:17) Rev: 1

Certificate 12367

Contact/Location: SHOP ? - LINMCA Page 2 of 2

Т:

F: