

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id JBS AMM 3 Component Refrigeration Compressor Fluid REFRIG COMP OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		Y2K0001784		
Sample Date		Client Info		25 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0		
Chromium	ppm	ASTM D5185m	>2	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>3	2		
Lead	ppm	ASTM D5185m	>2	0		
Copper	ppm	ASTM D5185m	>8	0		
Tin	ppm	ASTM D5185m	>4	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	5	<1		
Calcium	ppm	ASTM D5185m	12	3		
Phosphorus	ppm	ASTM D5185m	12	0		
Zinc	ppm	ASTM D5185m	12	0		
Sulfur	ppm	ASTM D5185m	1000	0		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m	210	0		
Potassium	ppm	ASTM D5185m	>20	ء <1		
Water	%	ASTM D6304	>0.01	0.001		
ppm Water	ppm	ASTM D6304	>100	7		
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm	200	ASTM D7647	>10000	10635		
•		ASTM D7647 ASTM D7647		-		
Particles >6µm			>2500	1351		
Particles >14µm		ASTM D7647	>320	18		
Particles >21µm		ASTM D7647	>80	3		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	21/18/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.10	0.014		

Contact/Location: SERVICE MANAGER - Y2KSIO Page 1 of 2



OIL ANALYSIS REPORT

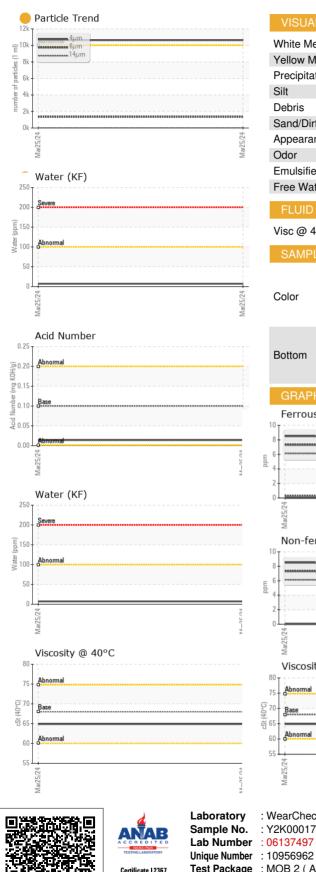

NONE White Metal *Visual NONE scalar Yellow Metal *Visual NONE NONE scalar NONE Precipitate scalar *Visual NONE scalar *Visual NONE NONE *Visual NONE NONE scalar Sand/Dirt NONE NONE scalar *Visual NORML Appearance scalar *Visual NORML *Visual NORML NORML scalar *Visual **Emulsified Water** scalar >0.01 NEG Free Water scalar *Visual NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 68 64.9 SAMPLE IMAGES no image no image Bottom no image no image Ferrous Alloys Particle Count 491.5 122,88 30 72 7.68 (per 1 ml) Mar25/24 4406 1,920 :1999 Cle Non-ferrous Metals 480 120 14 31 Mar25/74 214 28 Viscosity @ 40°C Acid Number (^{0.25}) (⁰/HO) Ê 0.15 - ² 0.10 Abnorma Acid Ni 0.05 0.00 Mar25/24 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **Y2K FLUID POWER** : Y2K0001784 Received : 03 Apr 2024 3620 N LEWIS AVE Tested : 04 Apr 2024 SIOUX FALLS, SD Diagnosed : 05 Apr 2024 - Don Baldridge US 57104 Test Package : MOB 2 (Additional Tests: KF, PrtCount) Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (605)332-0988

Report Id: Y2KSIO [WUSCAR] 06137497 (Generated: 04/05/2024 18:15:21) Rev: 1

Contact/Location: SERVICE MANAGER - Y2KSIO

T:

sales@y2kfiltration.com