

Area


**PALASYN 45**

Machine Id

**SULLIVAN PALATEK 22GE003197 - HOST MATERIALS**

Component

**Compressor**

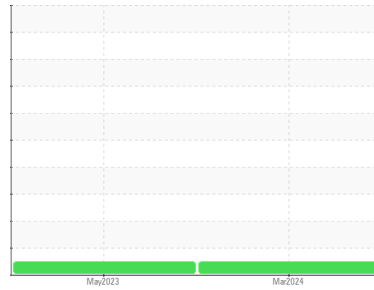

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**    method    limit/base    current    history1    history2

Sample Number	Client Info		<b>UCS06137531</b>	UCS05864431	---
Sample Date	Client Info		<b>28 Mar 2024</b>	30 May 2023	---
Machine Age	hrs	Client Info	<b>1296</b>	535	---
Oil Age	hrs	Client Info	<b>761</b>	535	---
Oil Changed		Client Info	<b>Changed</b>	Not Changd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

**CONTAMINATION**    method    limit/base    current    history1    history2

Water	WC Method	>0.1	<b>NEG</b>	NEG	---
-------	-----------	------	------------	-----	-----

**WEAR METALS**    method    limit/base    current    history1    history2

Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m		<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

**ADDITIVES**    method    limit/base    current    history1    history2

Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	0	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Calcium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m	966	<b>617</b>	675	---
Zinc	ppm	ASTM D5185m	0	<b>5</b>	0	---
Sulfur	ppm	ASTM D5185m	1309	<b>1578</b>	1829	---



**CONTAMINANTS**    method    limit/base    current    history1    history2

Silicon	ppm	ASTM D5185m	>25	<b>2</b>	2	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---

**FLUID DEGRADATION**    method    limit/base    current    history1    history2

Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	<b>0.09</b>	0.136	---
------------------	----------	------------	-------	-------------	-------	-----


# OIL ANALYSIS REPORT

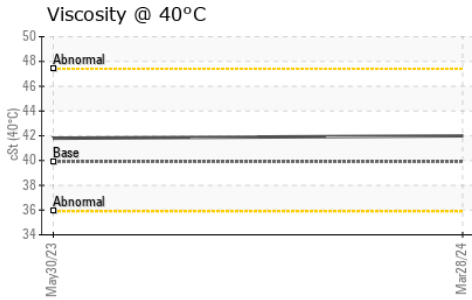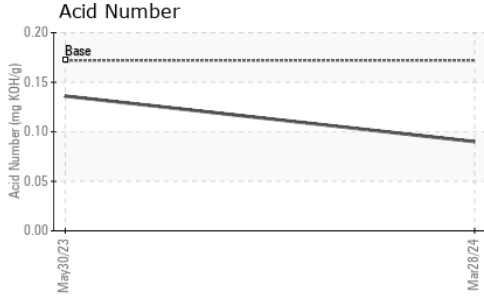





PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	0.2%
Free Water	scalar	*Visual		NEG	---

PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 40°C	cSt	ASTM D445	39.9	42.0	41.8

PARAMETER	method	limit/base	current	history1	history2
SAMPLE IMAGES					

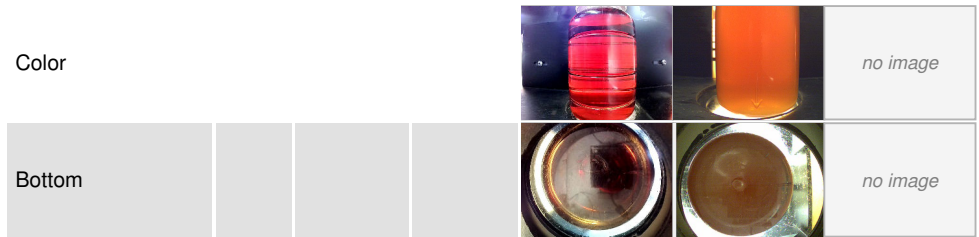

## GRAPHS

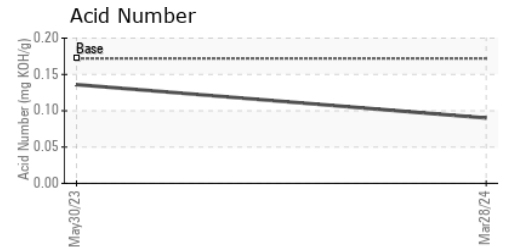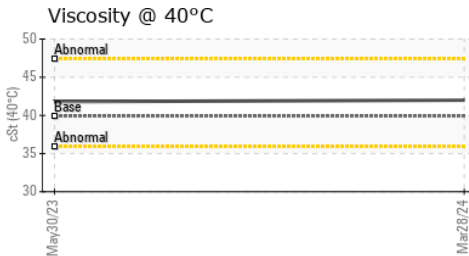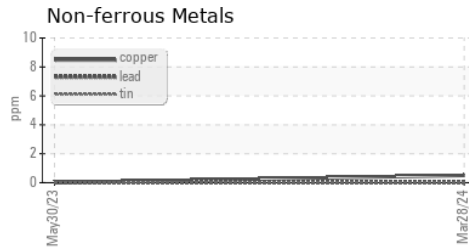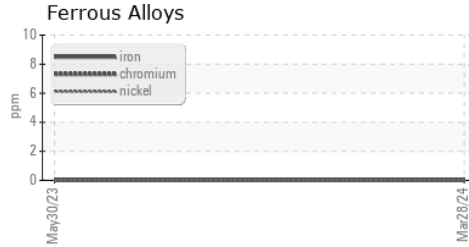

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06137531 **Received** : 03 Apr 2024  
**Lab Number** : 06137531 **Tested** : 04 Apr 2024  
**Unique Number** : 10956996 **Diagnosed** : 05 Apr 2024 - Sean Felton  
**Test Package** : IND 2

**JEMCO-MAXAIR**

WEST FARGO, ND  
US 58078

Contact: DALE K  
dalek@jemco-maxair.com

T: (701)281-0362

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)