


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

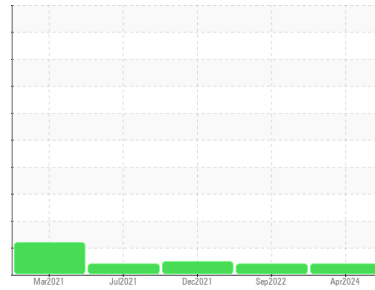

Area
[W02008167]
 Machine Id
VOLVO A25G 752086
 Component
Diesel Engine
 Fluid
MOBIL 15W40 (11 GAL)



DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W02008167)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0001138	VCP388663	VCP327004
Sample Date	Client Info		02 Apr 2024	28 Sep 2022	20 Dec 2021
Machine Age	hrs	Client Info	2420	1951	1490
Oil Age	hrs	Client Info	500	500	500
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			ATTENTION	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	15	8	10
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >30	3	2	0
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >20	3	4	9
Tin	ppm	ASTM D5185m >20	<1	1	1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	233	59	37
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	96	45	43
Manganese	ppm	ASTM D5185m	1	<1	<1
Magnesium	ppm	ASTM D5185m	589	449	528
Calcium	ppm	ASTM D5185m	1500	1719	1777
Phosphorus	ppm	ASTM D5185m	794	894	942
Zinc	ppm	ASTM D5185m	902	1053	1055
Sulfur	ppm	ASTM D5185m	2969	3372	2489

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	5	4	3
Sodium	ppm	ASTM D5185m >118	1	2	1
Potassium	ppm	ASTM D5185m >20	<1	0	<1
Fuel	%	ASTM D3524 >3.0	<1.0	0.5	<1.0





INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	7.0	7.8	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.5	22.3	23.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.2	19.6	21.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.7	10.5	9.6





OIL ANALYSIS REPORT

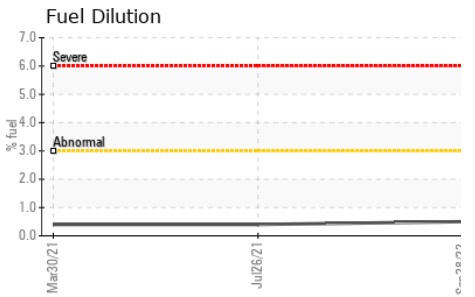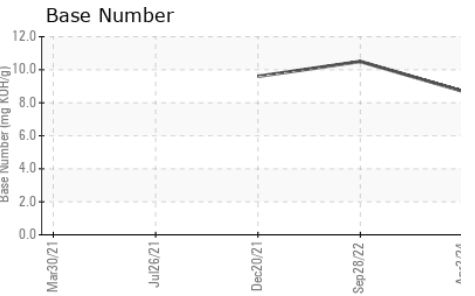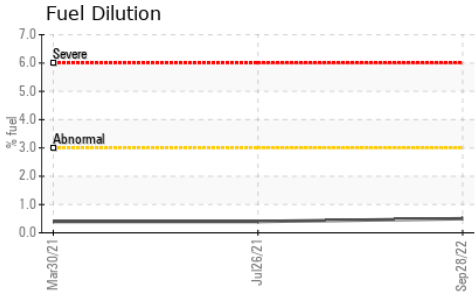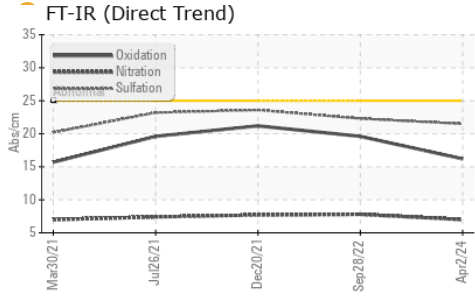

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	● 12.3	● 12.0	12.5

GRAPHS

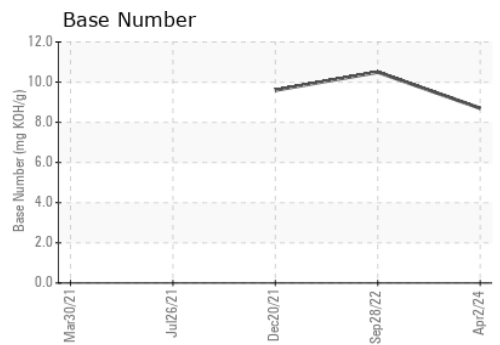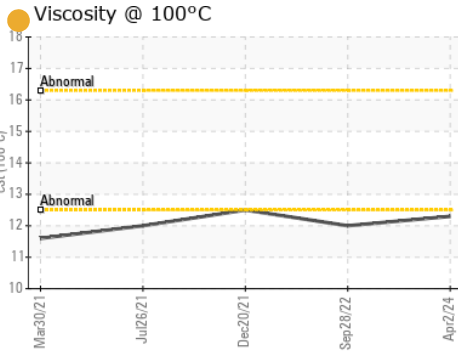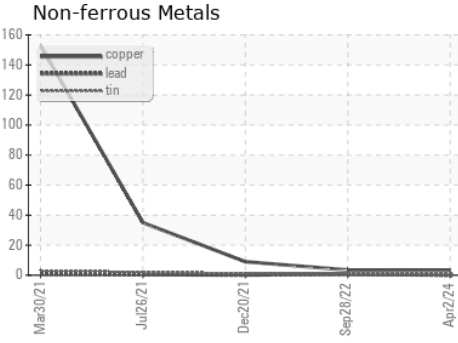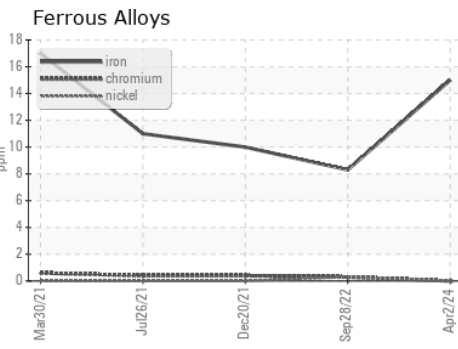

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001138 **Received** : 03 Apr 2024
Lab Number : 06137885 **Tested** : 04 Apr 2024
Unique Number : 10962693 **Diagnosed** : 05 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests : FuelDilution, TBN)

CWS-STRITTMATTER
 9102 OWENS DR
 MANASSAS PARK, VA
 US 20111
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)