




# OIL ANALYSIS REPORT

## Sample Rating Trend

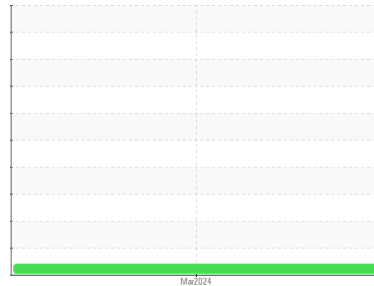

## VISCOSITY



Machine Id  
**SZLG233026**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>WC0880917</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>08 Mar 2024</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>827</b>         | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>1500</b>        | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | ---      | ---      |
| Sample Status |             |             | <b>ATTENTION</b>   | ---      | ---      |

### CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water  | WC Method | >0.2       | <b>NEG</b> | ---      | ---      |
| Glycol | WC Method |            | <b>NEG</b> | ---      | ---      |

### WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>4</b>     | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>0</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >4   | <b>0</b>     | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >20  | <b>5</b>     | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >330 | <b>5</b>     | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |

### ADDITIVES

|            | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>139</b>  | ---      | ---      |
| Barium     | ppm    | ASTM D5185m | <b>0</b>    | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>60</b>   | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>1</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>397</b>  | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>1756</b> | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>1021</b> | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>1179</b> | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>3812</b> | ---      | ---      |

### CONTAMINANTS

|           | method | limit/base      | current    | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>4</b>   | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m >50 | <b>5</b>   | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b>   | ---      | ---      |
| Fuel      | %      | ASTM D3524 >5   | <b>1.2</b> | ---      | ---      |

### INFRA-RED





|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.1</b>  | ---      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.3</b>  | ---      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>19.5</b> | ---      | ---      |

### FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>16.7</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>9.1</b>  | ---      | ---      |







# OIL ANALYSIS REPORT

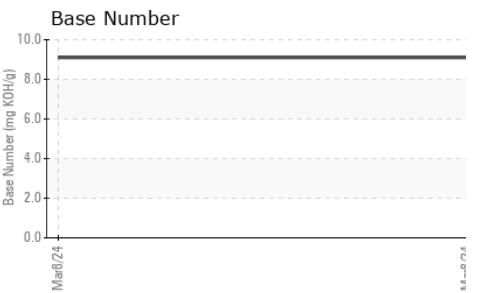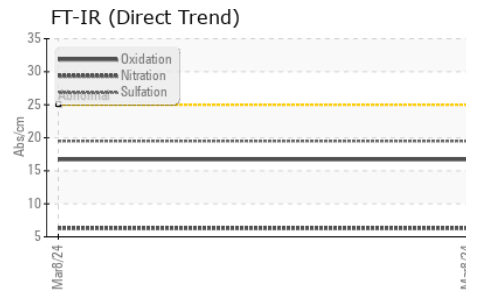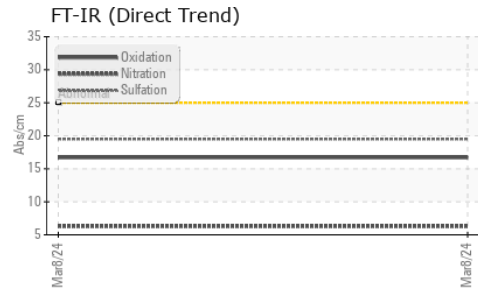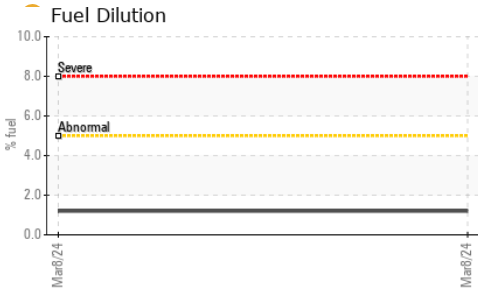

| VISUAL           | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      | --- |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      | --- |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      | --- |
| Free Water       | scalar | *Visual    |         | NEG      | ---      | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | ● 11.3   | ---      | --- |

## GRAPHS

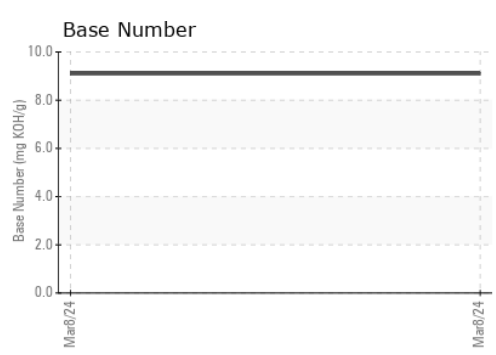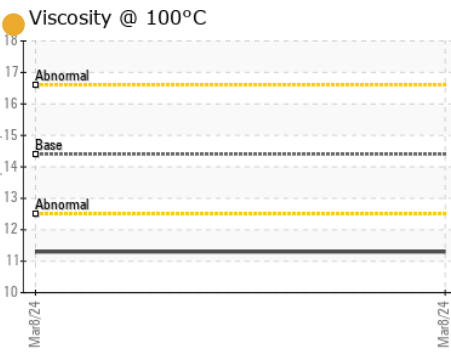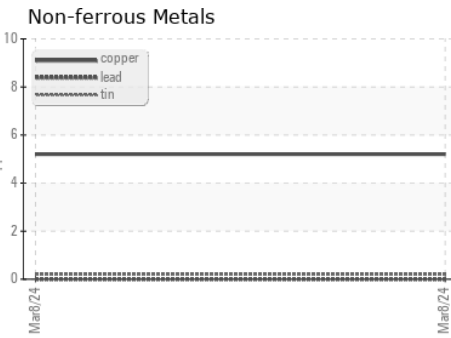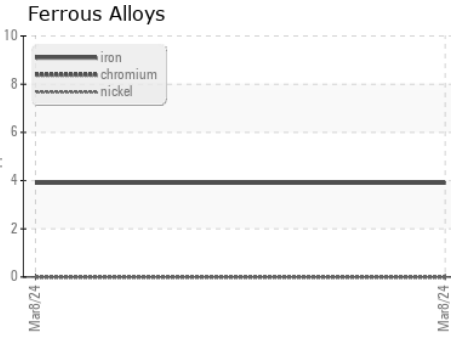

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0880917 **Received** : 03 Apr 2024  
**Lab Number** : 06137933 **Tested** : 08 Apr 2024  
**Unique Number** : 10962741 **Diagnosed** : 08 Apr 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**DOLE FRESH FRUIT**  
 PO BOX 1689  
 GULFPOR, MS  
 US 39502  
 Contact: JORDAN JOHNSTON  
 jordan.johnston@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (228)867-2970