

OIL ANALYSIS REPORT

Sample Rating Trend

FUEL

Machine Id

EASG101662-3

Diesel Engine Fluid CHEVRON 15W40 (--- QTS)

DIAGNOSIS

A Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0905089		
Sample Date		Client Info		14 Mar 2024		
Machine Age	hrs	Client Info		3675		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				MARGINAL		
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	3		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	4		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	2		
Tin	ppm	ASTM D5185m	>15	- <1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		323		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		122		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		630		
Calcium	ppm	ASTM D5185m		1475		
Phosphorus	ppm	ASTM D5185m		712		
Zinc	ppm	ASTM D5185m		833		
Sulfur	ppm	ASTM D5185m		2710		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4		
Sodium	ppm	ASTM D5185m	>50	2		
Potassium	ppm	ASTM D5185m	>20	0		
Fuel	%	ASTM D3524	>5	<mark>▲</mark> 3.4		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1		
Nitration	Abs/cm	*ASTM D7624	>20	7.3		
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0		
	AUS/.111111		200	13.0		
Base Number (BN)	mg KOH/g	ASTM D2896	20	8.5		



OIL ANALYSIS REPORT

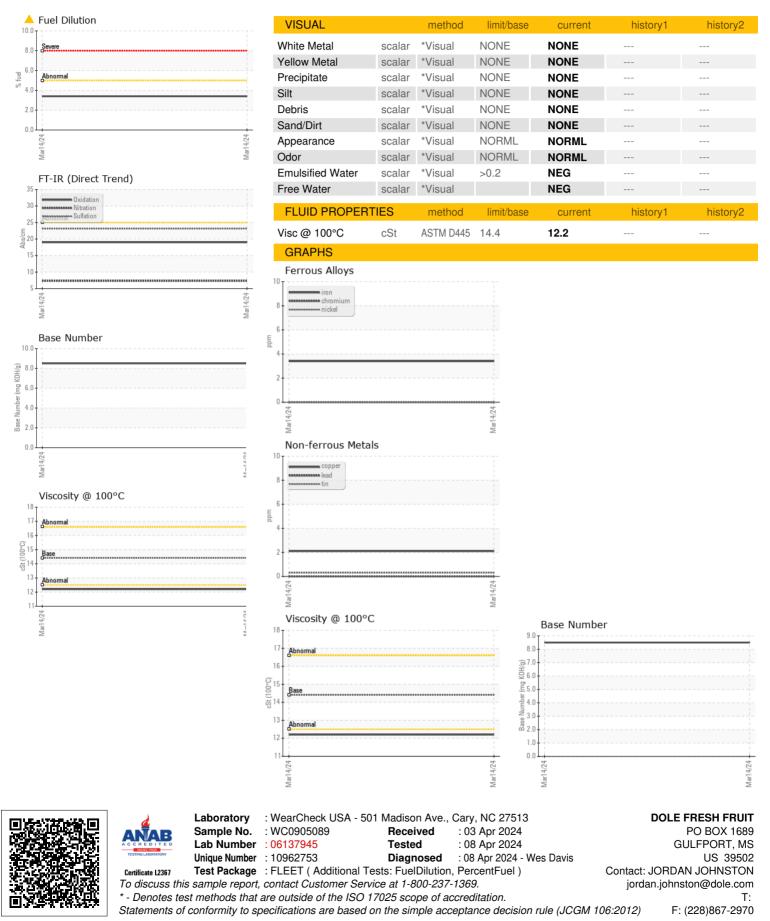

Contact/Location: JORDAN JOHNSTON - DOLGUL