




OIL ANALYSIS REPORT

Sample Rating Trend

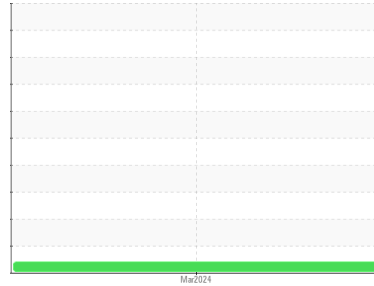

VISCOSITY



Machine Id
SZLG233078
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (--- QTS)

DIAGNOSIS

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0905105	---	---
Sample Date	Client Info			19 Mar 2024	---	---
Machine Age	hrs	Client Info		1031	---	---
Oil Age	hrs	Client Info		1500	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ATTENTION	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	---	---
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	6	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	4	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		108	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		382	---	---
Calcium	ppm	ASTM D5185m		1746	---	---
Phosphorus	ppm	ASTM D5185m		1003	---	---
Zinc	ppm	ASTM D5185m		1171	---	---
Sulfur	ppm	ASTM D5185m		3732	---	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	---	---
Sodium	ppm	ASTM D5185m	>50	3	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel	%	ASTM D3524	>5	1.4	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.0	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.8	---	---







OIL ANALYSIS REPORT

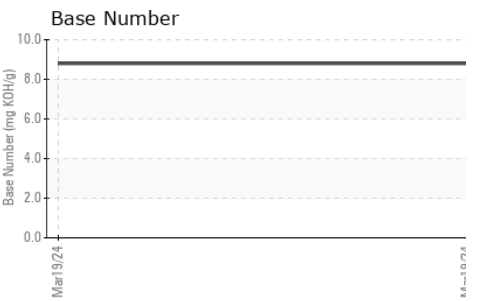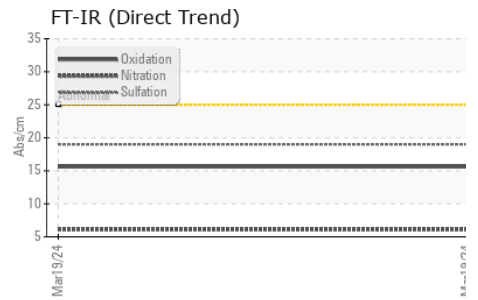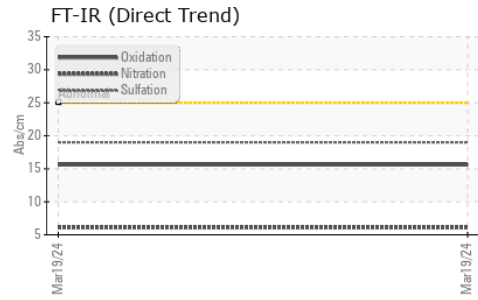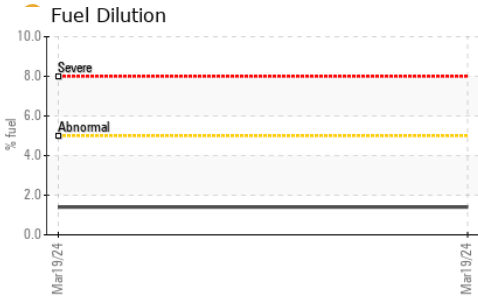

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	● 11.3	---	---

GRAPHS

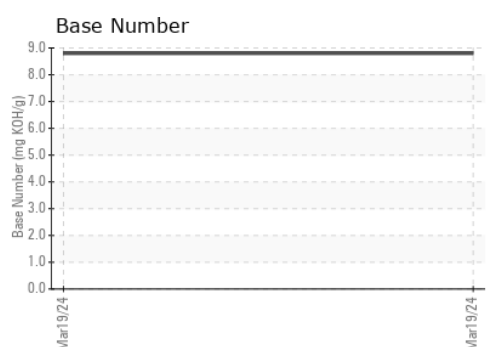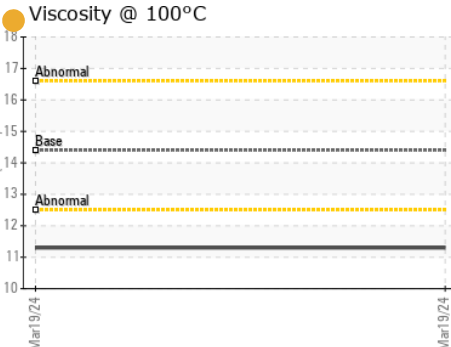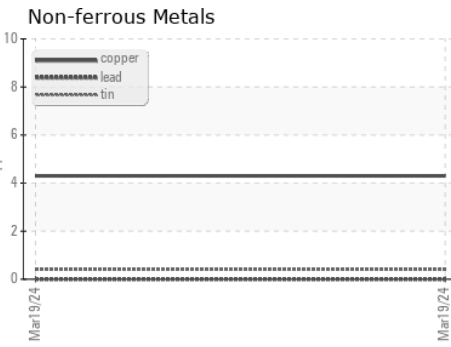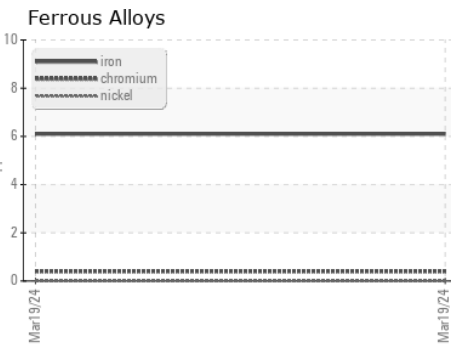

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0905105 **Received** : 03 Apr 2024
Lab Number : 06137954 **Tested** : 08 Apr 2024
Unique Number : 10962762 **Diagnosed** : 08 Apr 2024 - Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

DOLE FRESH FRUIT
 PO BOX 1689
 GULFPOR, MS
 US 39502

Contact: JORDAN JOHNSTON
 jordan.johnston@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: (228)867-2970