



OIL ANALYSIS REPORT

Sample Rating Trend



FUEL



Machine Id
SZLG232927
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (--- QTS)

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring.

▲ Fluid Condition

Sulfur ppm levels are abnormally high. Visc @ 100°C is abnormally low. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0905086	---	---
Sample Date	Client Info	21 Mar 2024	---	---
Machine Age	hrs Client Info	1422	---	---
Oil Age	hrs Client Info	1500	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	7	---	---
Chromium ppm	ASTM D5185m >20	<1	---	---
Nickel ppm	ASTM D5185m >4	0	---	---
Titanium ppm	ASTM D5185m	0	---	---
Silver ppm	ASTM D5185m >3	0	---	---
Aluminum ppm	ASTM D5185m >20	5	---	---
Lead ppm	ASTM D5185m >40	0	---	---
Copper ppm	ASTM D5185m >330	4	---	---
Tin ppm	ASTM D5185m >15	<1	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	97	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	58	---	---
Manganese ppm	ASTM D5185m	1	---	---
Magnesium ppm	ASTM D5185m	394	---	---
Calcium ppm	ASTM D5185m	1767	---	---
Phosphorus ppm	ASTM D5185m	993	---	---
Zinc ppm	ASTM D5185m	1177	---	---
Sulfur ppm	ASTM D5185m	▲ 3699	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	4	---	---
Sodium ppm	ASTM D5185m >50	3	---	---
Potassium ppm	ASTM D5185m >20	0	---	---
Fuel %	ASTM D3524 >5	▲ 2.7	---	---

INFRA-RED





method	limit/base	current	history1	history2
Soot %	*ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm *ASTM D7624 >20	7.1	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	19.8	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.3	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.9	---	---








OIL ANALYSIS REPORT

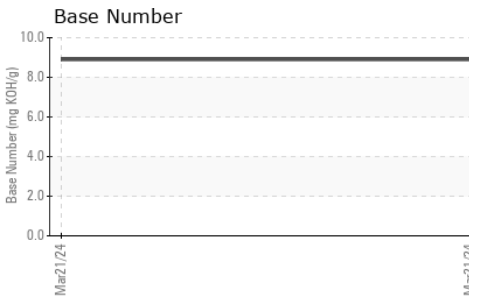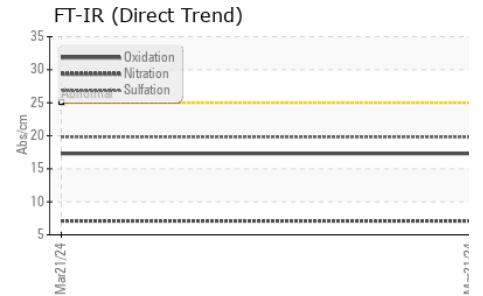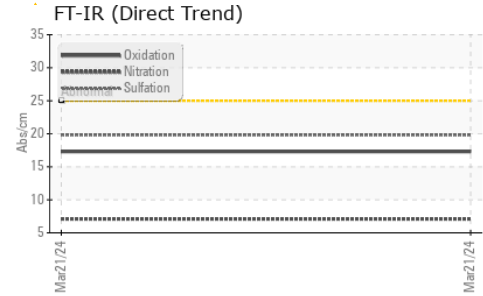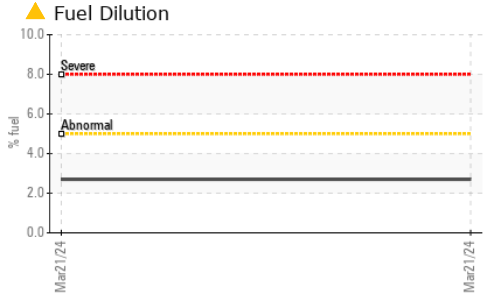

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.3	---	---

GRAPHS

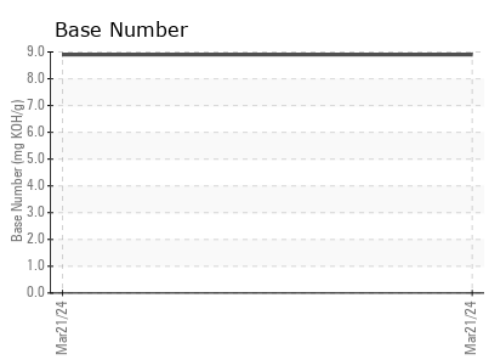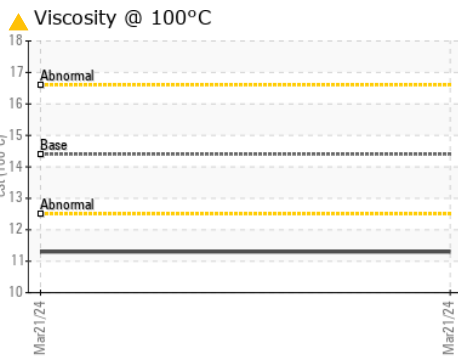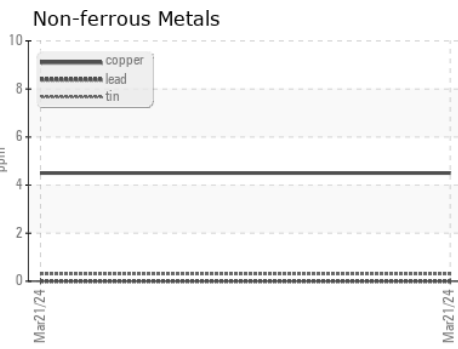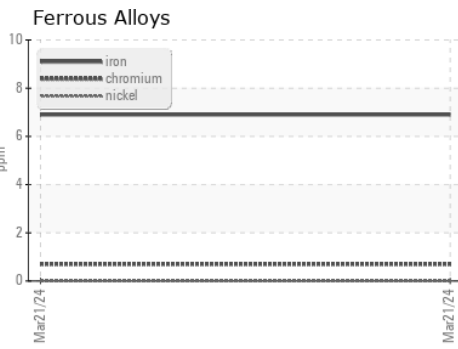

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0905086 **Received** : 03 Apr 2024
Lab Number : 06137965 **Tested** : 08 Apr 2024
Unique Number : 10962773 **Diagnosed** : 08 Apr 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

DOLE FRESH FRUIT
 PO BOX 1689
 GULFPORT, MS
 US 39502
 Contact: JORDAN JOHNSTON
 jordan.johnston@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)