




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**VOLVO L90H 2801 - L90H**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

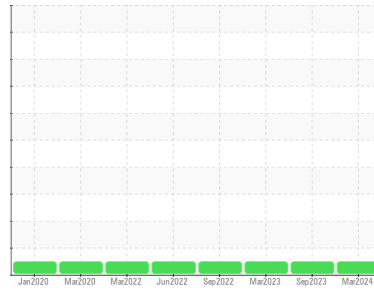

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PTK0005513</b>	PTK0004508	PTK0004522
Sample Date	Client Info			<b>29 Mar 2024</b>	12 Sep 2023	09 Mar 2023
Machine Age	hrs	Client Info		<b>10961</b>	10304	9334
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>10</b>	10	9
Chromium	ppm	ASTM D5185m	>20	<b>7</b>	7	6
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Copper	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>3</b>	4	3
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>3</b>	3	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	25	<b>10</b>	11	13
Calcium	ppm	ASTM D5185m	200	<b>83</b>	86	80
Phosphorus	ppm	ASTM D5185m	300	<b>337</b>	349	323
Zinc	ppm	ASTM D5185m	370	<b>416</b>	445	364
Sulfur	ppm	ASTM D5185m	2500	<b>1454</b>	1595	1130

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>8</b>	8	8
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>904</b>	1368	4038
Particles >6µm		ASTM D7647	>2500	<b>253</b>	308	880
Particles >14µm		ASTM D7647	>320	<b>23</b>	20	83
Particles >21µm		ASTM D7647	>80	<b>4</b>	6	23
Particles >38µm		ASTM D7647	>20	<b>0</b>	1	1
Particles >71µm		ASTM D7647	>4	<b>0</b>	1	0
Oil Cleanliness		ISO 4406 (c)	>18/15	<b>15/12</b>	15/11	17/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.43</b>	0.31	0.28


# OIL ANALYSIS REPORT

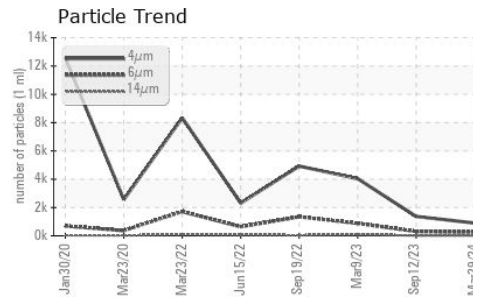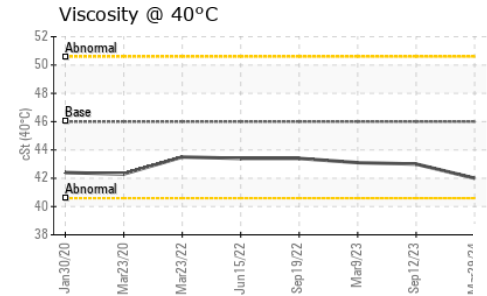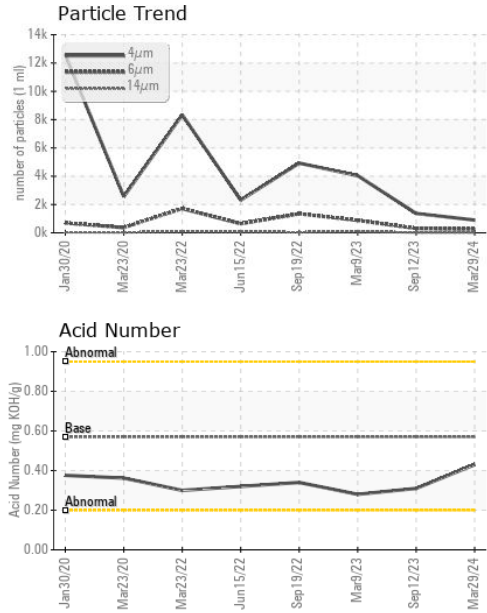

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	42.0	43.0	43.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

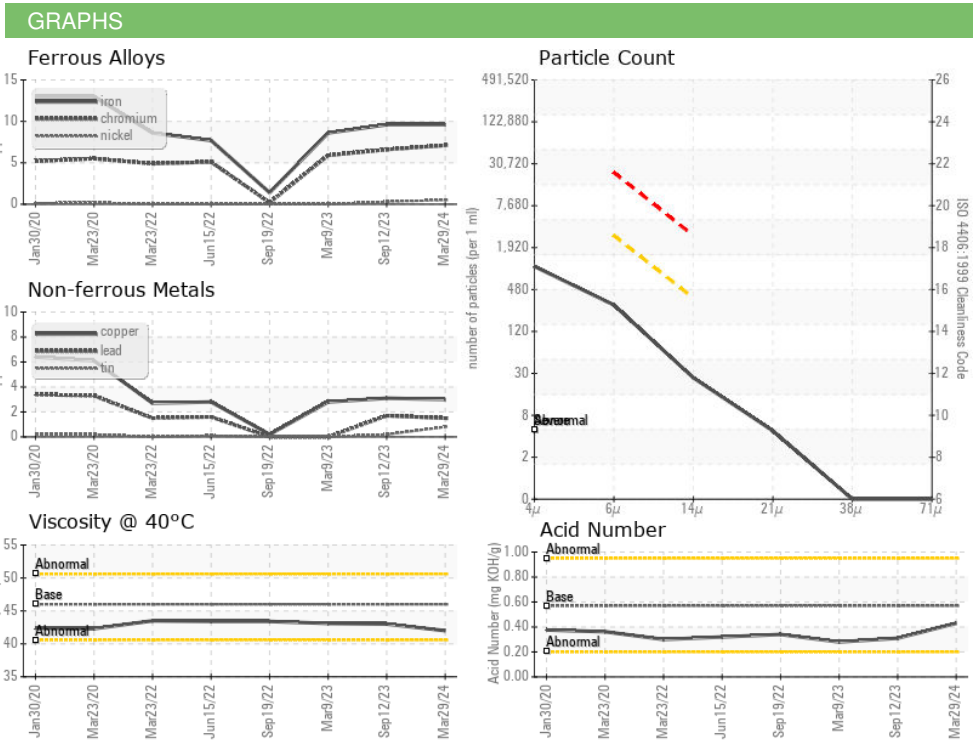

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PTK0005513  
**Lab Number** : 06138047  
**Unique Number** : 10962855  
**Test Package** : MOB 2  
**Received** : 03 Apr 2024  
**Tested** : 04 Apr 2024  
**Diagnosed** : 04 Apr 2024 - Wes Davis

**LKQ BALTIMORE-HAWKINS**  
 2801 HAWKINS POINT RD  
 BALTIMORE, MD  
 US 21226  
 Contact: Joseph Duff  
 joduff@LKQCORP.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)