

OIL ANALYSIS REPORT

KAESER SM 10 5349925 (S/N 1038)

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

Compressor

Machine Id

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004788	KCP48145	KCP42581
Sample Date		Client Info		30 Jan 2024	18 Aug 2022	07 Mar 2022
Machine Age	hrs	Client Info		38284	31926	29972
Oil Age	hrs	Client Info		0	1954	4000
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	<1	0
Lead		ASTM D5185m	>10	0	0	0
	ppm	ASTM D5185m		31	11	18
Copper Tin	ppm	ASTM D5185m	>50 >10	٥١ <1	0	0
	ppm		>10			
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m	90	0	5	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	2	21	0
Calcium	ppm	ASTM D5185m	2	3	0	<1
Phosphorus	ppm	ASTM D5185m		0	3	1
Zinc	ppm	ASTM D5185m		14	32	4
Sulfur	ppm	ASTM D5185m		17593	17321	14322
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	2
Sodium	ppm	ASTM D5185m		<1	4	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.05	0.004	▲ 0.213	0.003
ppm Water	ppm	ASTM D6304	>500	46	▲ 2130	34.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4354		
Particles >6µm		ASTM D7647	>1300	1615		
Particles >14µm		ASTM D7647	>80	135		
Particles >21µm		ASTM D7647		41		
Particles >38µm		ASTM D7647		2		
Particles >71µm		ASTM D7647 ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>3	0		
				<u> </u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOH/a	ASTM D8045	0.4	0.35	0.27	0.31

Acid Number (AN) mg KOH/g ASTM D8045 0.4

Report Id: KROFOR [WUSCAR] 06138071 (Generated: 04/05/2024 19:42:51) Rev: 1

0.35

0.27 0.31 Contact/Location: ERIC MCCOY - KROFOR Page 1 of 2







Water (ppm)


Built for a lifetime.

OIL ANALYSIS REPORT

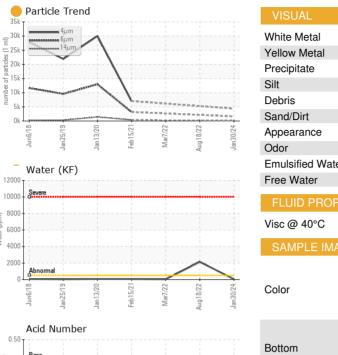

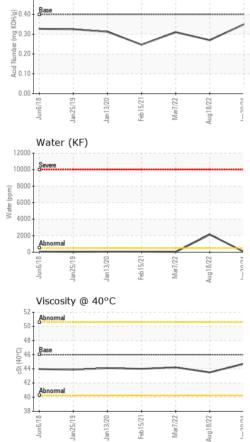

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	▲ 1.0	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	43.5	44.2
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color				•		
Bottom						

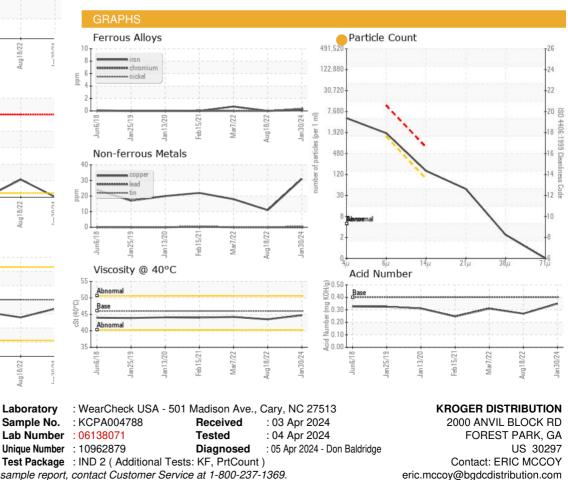

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KROFOR [WUSCAR] 06138071 (Generated: 04/05/2024 19:42:51) Rev: 1

Certificate 12367

Contact/Location: ERIC MCCOY - KROFOR Page 2 of 2

T:

F: