


# **OIL ANALYSIS REPORT**

Sample Rating Trend

SAMPLE INFORMATION method limit/base



current

history1

history2

Machine Id

5 (S/N AR10404V)

Component Refrigeration Compressor Fluid

USPI 1009-68 SC (--- GAL)

# DIAGNOSIS

#### A Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

## Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	nistory i	nistory2
Sample Number		Client Info		USP0008087	USP0000343	USP246817
Sample Date		Client Info		02 Apr 2024	31 Aug 2023	26 Feb 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	12	14	11
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m	0	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm		>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	<1
Copper	ppm	ASTM D5185m	>8	<1	<1	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc	ppm	ASTM D5185m		0	<1	2
Sulfur	ppm	ASTM D5185m	50	0	39	5
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	<1	4
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.01	0.002	0.003	0.002
ppm Water	ppm	ASTM D6304	>100	18	28.0	15.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	▲ 69948	▲ 151035	18504
Particles >6µm		ASTM D7647		<u> </u>	<u> </u>	<b>5</b> 128
Particles >14µm		ASTM D7647	>320	114	254	240
Particles >21µm		ASTM D7647		14	29	44
Particles >38µm		ASTM D7647	>20	1	1	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	A 23/20/14	A 24/22/15	21/20/15
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015

Contact/Location: ANDREAS KALISPERIS - PHIPHIPEN




# **OIL ANALYSIS REPORT**



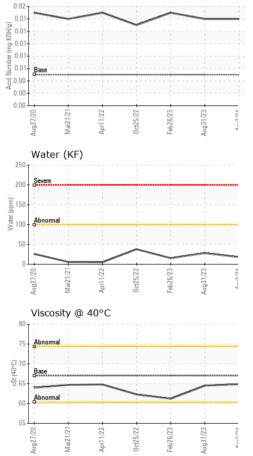

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	64.9	64.5	61.2
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

Bottom

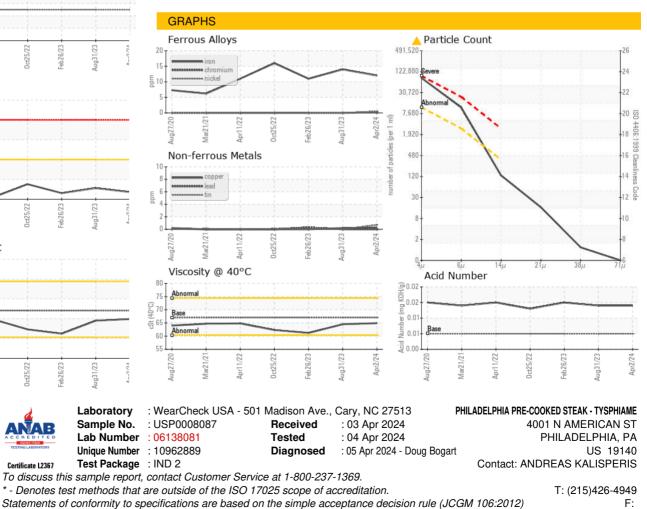

Report Id: PHIPHIPEN [WUSCAR] 06138081 (Generated: 04/05/2024 12:09:51) Rev: 1

Contact/Location: ANDREAS KALISPERIS - PHIPHIPEN

Page 2 of 2