


PROBLEM SUMMARY

Sample Rating Trend






FUEL

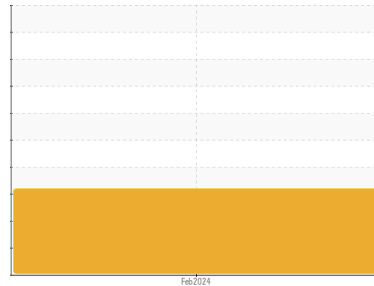

Machine Id
LINDE 5255
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

COMPONENT CONDITION SUMMARY

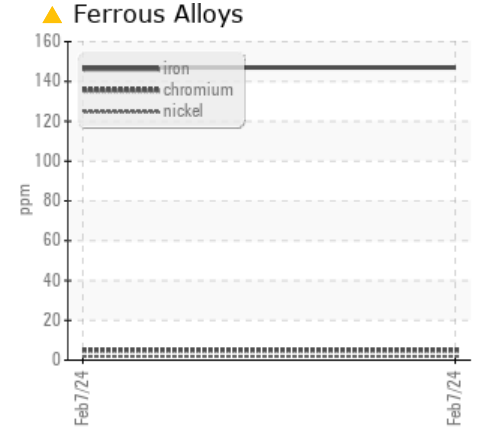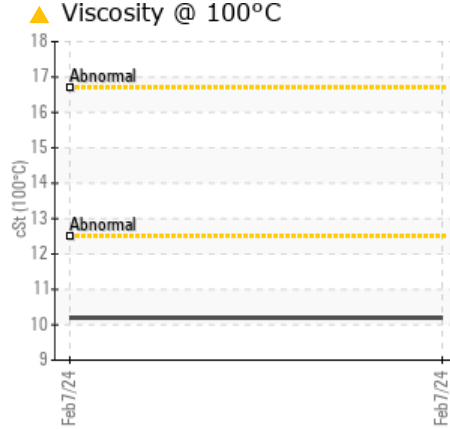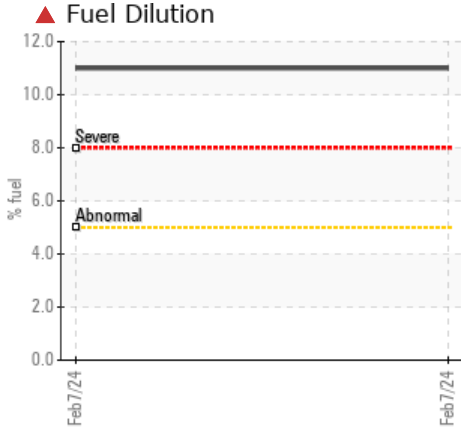

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Iron	ppm	ASTM D5185m	>100	▲ 147	---	---
Fuel	%	ASTM D3524	>5	▲ 11.0	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 10.2	---	---

Customer Id: ALTAMA
 Sample No.: PE0002463
 Lab Number: 06138277
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com


RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

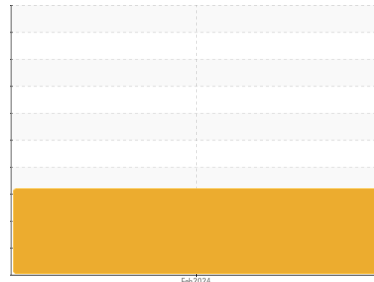

FUEL



Machine Id
LINDE 5255
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

▲ Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PE0002463	---	---
Sample Date	Client Info		07 Feb 2024	---	---
Machine Age	hrs	Client Info	17904	---	---
Oil Age	hrs	Client Info	300	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 147	---	---
Chromium	ppm	ASTM D5185m >20	5	---	---
Nickel	ppm	ASTM D5185m >4	2	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	17	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	16	---	---
Tin	ppm	ASTM D5185m >15	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	12	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	209	---	---
Manganese	ppm	ASTM D5185m	1	---	---
Magnesium	ppm	ASTM D5185m	12	---	---
Calcium	ppm	ASTM D5185m	2477	---	---
Phosphorus	ppm	ASTM D5185m	782	---	---
Zinc	ppm	ASTM D5185m	916	---	---
Sulfur	ppm	ASTM D5185m	2943	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	24	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	5	---	---
Fuel	%	ASTM D3524 >5	▲ 11.0	---	---






INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.5	---	---
Nitration	Abs/cm	*ASTM D7624 >20	17.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	26.8	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	26.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	---	---





OIL ANALYSIS REPORT

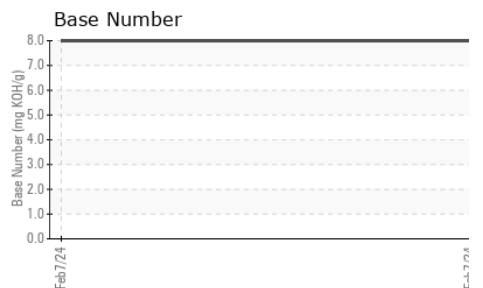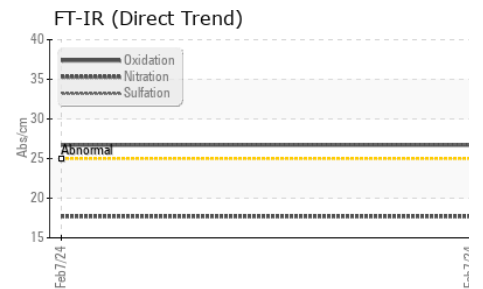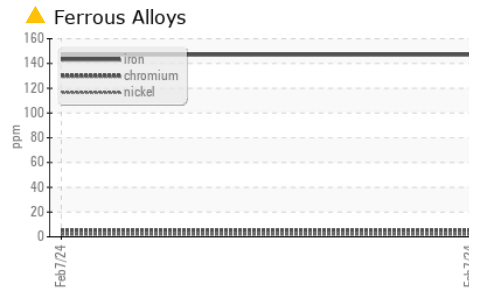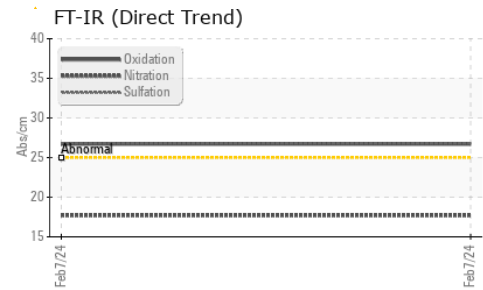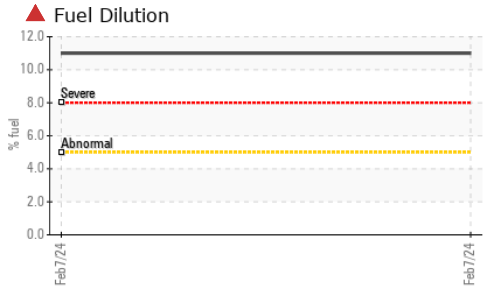

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 10.2	---	---

GRAPHS

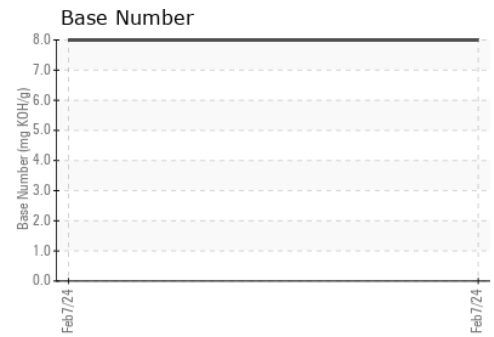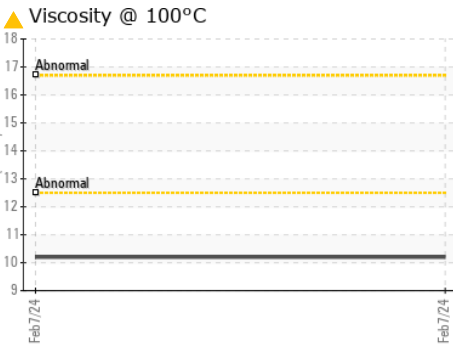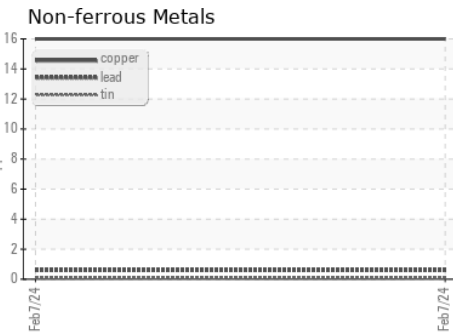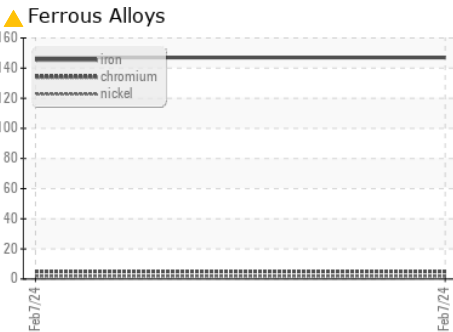

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0002463
Lab Number : **06138277**
Unique Number : 10963085
Test Package : CONST (Additional Tests: FT-IR, FuelDilution, ICP, KV100, PercentFuel, SCF, Na+BN)

ALTA FOREST PRODUCTS
 7127 US HWY 101
 AMANDA PARK, WA
 US 98526
 Contact: ROGER TJEPKEMA
 Rogertjepkema@altafp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)